2013 Oct.

MITSUBISHI MOTORS

SERVICE MANUAL

RSE (Rear Seat Entertainment)

CONTENTS

- FEATURES and SPECIFICATIONS.....2,3
- OPERATION.....3,4
- CONNECTORS.....5
- SYSTEM CONFIGURATION.....6
- BLOCK DIAGRAM.....7
- DISASSEMBLING PROCEDURES..... 8~13
- PARTS LIST.....14,15
- ELECTRICAL PARTS LIST..... 16~27
- PARTS LAYOUT ON PRINTED CIRCUIT BOARD.... 28~33
- SCHEMATIC DIAGRAM
  - PCB-MAIN.....34,35
  - PCB-PANEL.....36
  - PCB-MONI.....37,38
- VOLTAGE.....39
- WAVEFORM.....40

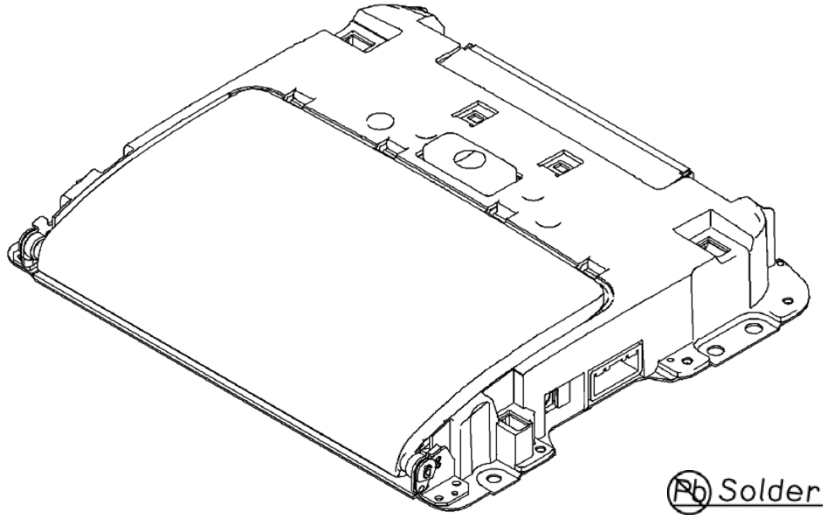

Model : **ED-330BE-R1,-WS**

MELCO Code : **3AB241,250**

PART No. : **8750A291YA, MZ360424EX**

MITSUBISHI ELECTRIC CORP. SANDA WORKS

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

FEATURES and SPECIFICATIONS

FEATURES

- 9 inch WVGA LCD.
- Built-in DV4 mecha.

SPECIFICATIONS

< Display Part >

- Screen size : 9 inch (23cm diagonally)
- Dimensions : 209.7(H) x 130.7(V)mm
- Weight (typ.) : 260g
- Number of pixels : 800 dots(H) x 480 lines(V)
- Pixel configuration : RGB stripe
- Dot pitch : 0.246(H) x 0.246(V)
- Driving system : Active matrix driving
- Display mode : Normally white
- Glass surface treatment : AG

< Disc Player Part >

- Application : DVD Video / Audio player
  Shock proof memory (64M-SDRAM) loading
  DVD = 2X-speed, CD = 4X-speed
  Multi session disc supported. (Max 50 sessions)
- Loading system : Slot-in, Power loading / eject
  12cm disc only.
  (8cm disc can be played with adaptor.)
- Loading function : ANY-TIME eject,
  Prevention mechanism of double insertion.
- Available standard / disc : Table 1 reference (page 3)
- Image output : NTSC Composite output (525/60)
  PAL Composite output (625/50)
  MACROVISION ANTITAING PROCESS,
  CGMS-A supported.
- Audio output : Down Mix 2ch (3-wire digital output)
- MP3 / WMA /AAC playback : Max number of folders = 255
  (Contain route folders)
  Max number of files = 2000
  Max number of hierarchies = 8

< Panel Part >

[Wireless audio transmit part]

- Modulation method : Frequency modulation method
- Transmit frequency : Right ch = 2.8MHz, Left ch = 2.3MHz

[Panel illumination part]

- Button : Umber
- Disc eject button : Umber

< External I/F Part >

- Sound signal rated input : 165mVrms (at 10kΩ terminal / 1kHz / sine wave)
- Max sound signal input : 1.0Vrms (at 10kΩ terminal / 1kHz / sine wave)
- Sound signal rated output : 1.0Vrms ± 0.1V
  (at max sound signal input / 10kΩ terminal)
- Image signal input : $1.0V_{p\text{-}p}$ (at 75Ω terminal / positively)
- Synchronized signal input : $0.286V_{p\text{-}p}$ (at 75Ω terminal / negatively)
  / Composite VIDEO
  * No analog RGB input in the current state.

< Others >

- Working temperature range : -30℃ ~ +75℃
- Working voltage range : 13.0 ± 3.0V
- Power supply : 13.2 ± 0.5V
- Max consumption current : Max 3.0A (BATT), Max 2.5mA (ACC)
- Dark current : Less than 1.0mA
- Dimensions : 350(W) x 57(H) x 292(D)mm
- Weight : 2.5kg

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

FEATURES and SPECIFICATIONS

Table 1 Available standard / disc

DISC / STANDARD	CD			DVD					
	CD	CD-R	CD-RW	DVD-ROM 1 layer	DVD-ROM 2 layers	DVD-R	DVD-RW	DVD+R	DVD+RW
CD-DA CD-TEXT	○	○ (*1)	○ (*1)	×	×	×	×	×	×
VIDEO-CD	○	○ (*1)	○ (*1)	×	×	×	×	×	×
MP3	○	○ (*1)	○ (*1)	×	×	○ (*1)	○ (*1)	○ (*1)	○ (*1)
WMA	○	○ (*1)	○ (*1)	×	×	○ (*1)	○ (*1)	○ (*1)	○ (*1)
AAC	○	○ (*1)	○ (*1)	×	×	○ (*1)	○ (*1)	○ (*1)	○ (*1)
DVD-VIDEO	×	×	×	○	○	○ (*1)	○ (*1)	×	×
DVD-AUDIO	×	×	×	○	○	○ (*1)	○ (*1)	×	×
DVD-VR	×	×	×	○	○	○ (*1)	○ (*1)	○ (*1)	○ (*1)

○ : Available × : Unavailable

(*1) : Not available according to the disk and writing specification.

OPERATION

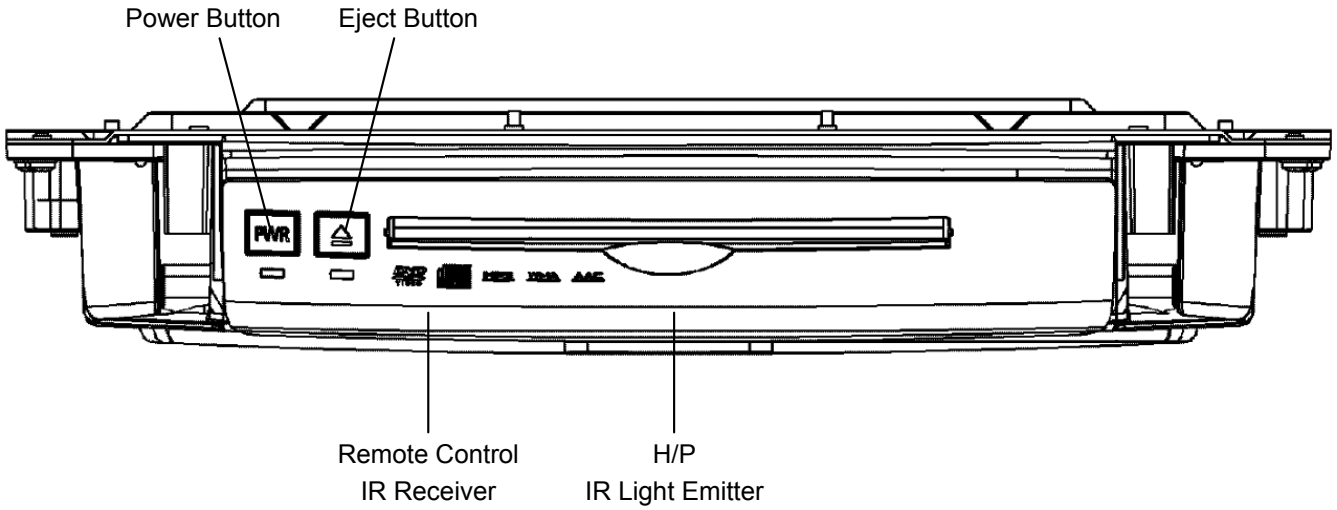

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

OPERATION

< REMOTE CONTROL (RE-311) >

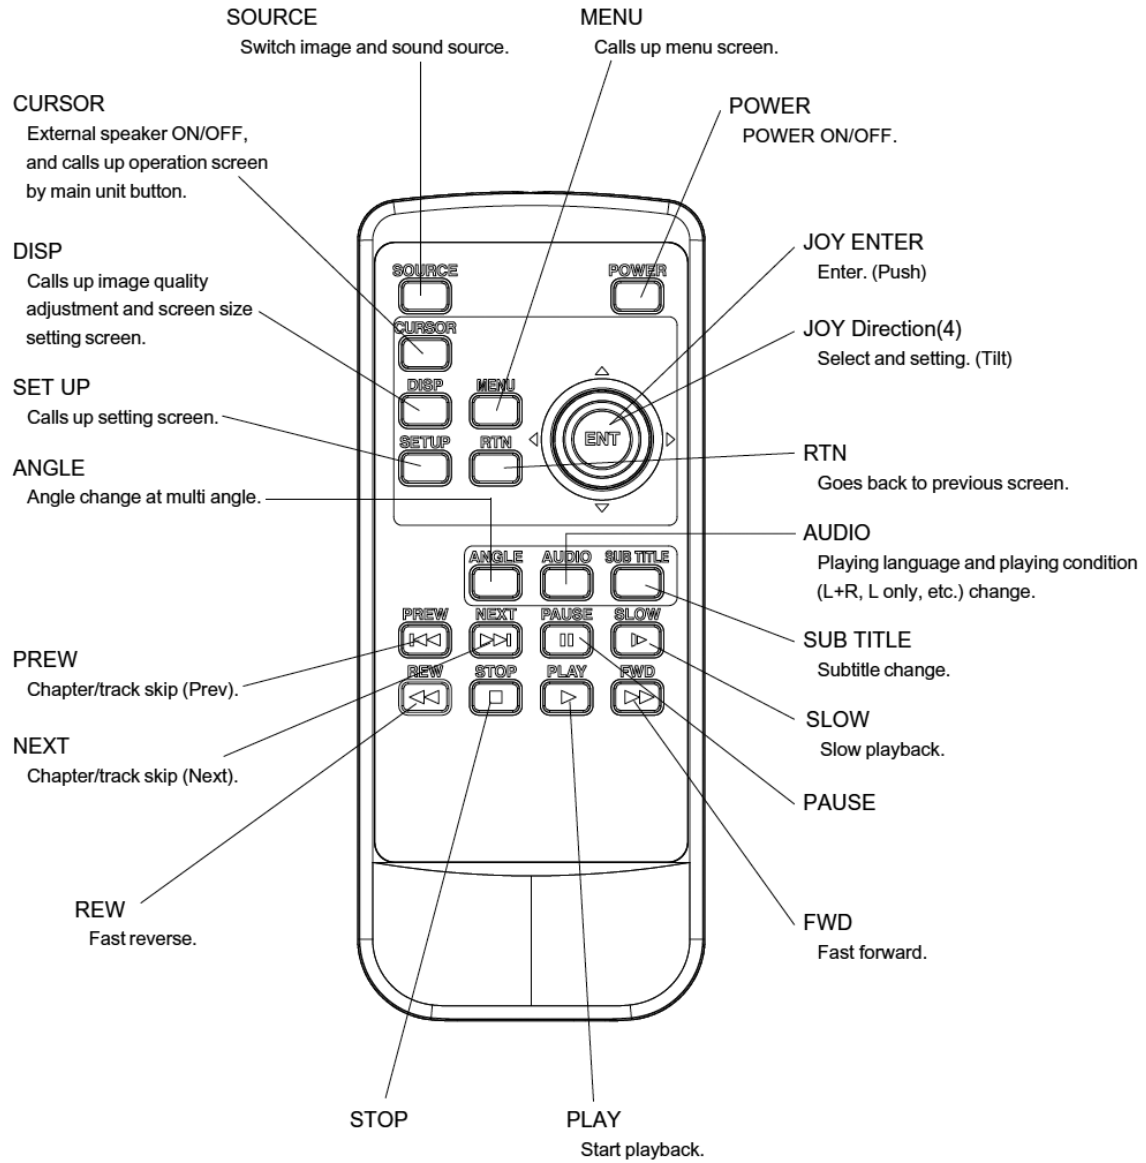

- **To play back AUX (external image and sound input) signal <AUX mode>**

Push the SOURCE button of the remote control to change the mode from DVD to AUX. Push the button again to change the front seat TV screen mode (with car navigation system) or DVD mode (without car navigation system).

- **To watch the front seat TV <Front seat TV screen mode>** (with car navigation system)

Push the MEDIA button of the audio to change the car navigation system to the TV mode. Push the SOURCE button of the remote control to change the mode from AUX to front seat TV screen. Push the button again to change the mode back to DVD.

(It is not possible to operate TV by this remote control.)

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

CONNECTORS

(Note)
Figure of connector seen from side of unit.

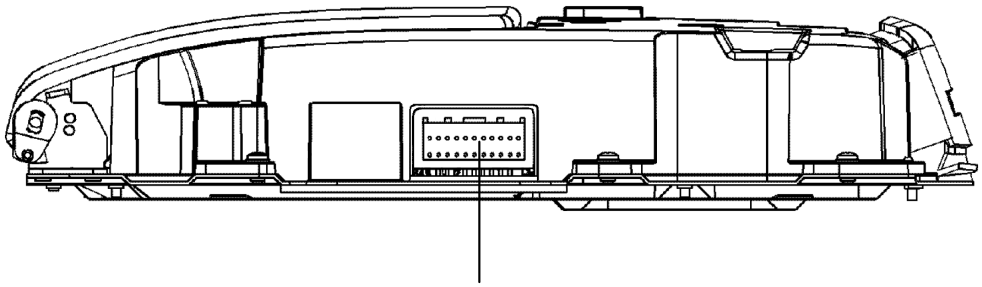

Vehicle Signal
22P Connector

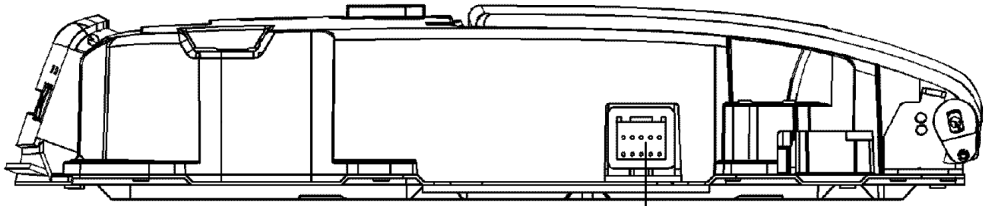

VTR Adapter Input
10P Connector

Vehicle Signal 22P Connector			
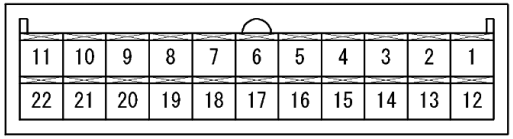			
PinNo.	Signal Name	PinNo.	Signal Name
1	AUDIO-R-OUT	12	AUDIO-OUT-SHIELD
2	AUDIO-L-OUT	13	-
3	VIDEO-ON (GND)	14	-
4	-	15	-
5	-	16	-
6	-	17	-
7	ILL	18	(REMO-SIG-GND)
8	ACC	19	(REMO-SIG-OUT)
9	+B	20	-
10	-	21	-
11	GND	22	-

VTR Adapter Input 10P Connector			
			
PinNo.	Signal Name	PinNo.	Signal Name
1	-	6	-
2	-	7	-
3	VTR-AUDIO-R-IN	8	VTR-AUDIO-L-IN
4	-	9	VTR-AUDIO-SHIELD
5	VTR-VIDEO-IN	10	VTR-VIDEO-SHIELD

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

SYSTEM CONFIGURATION

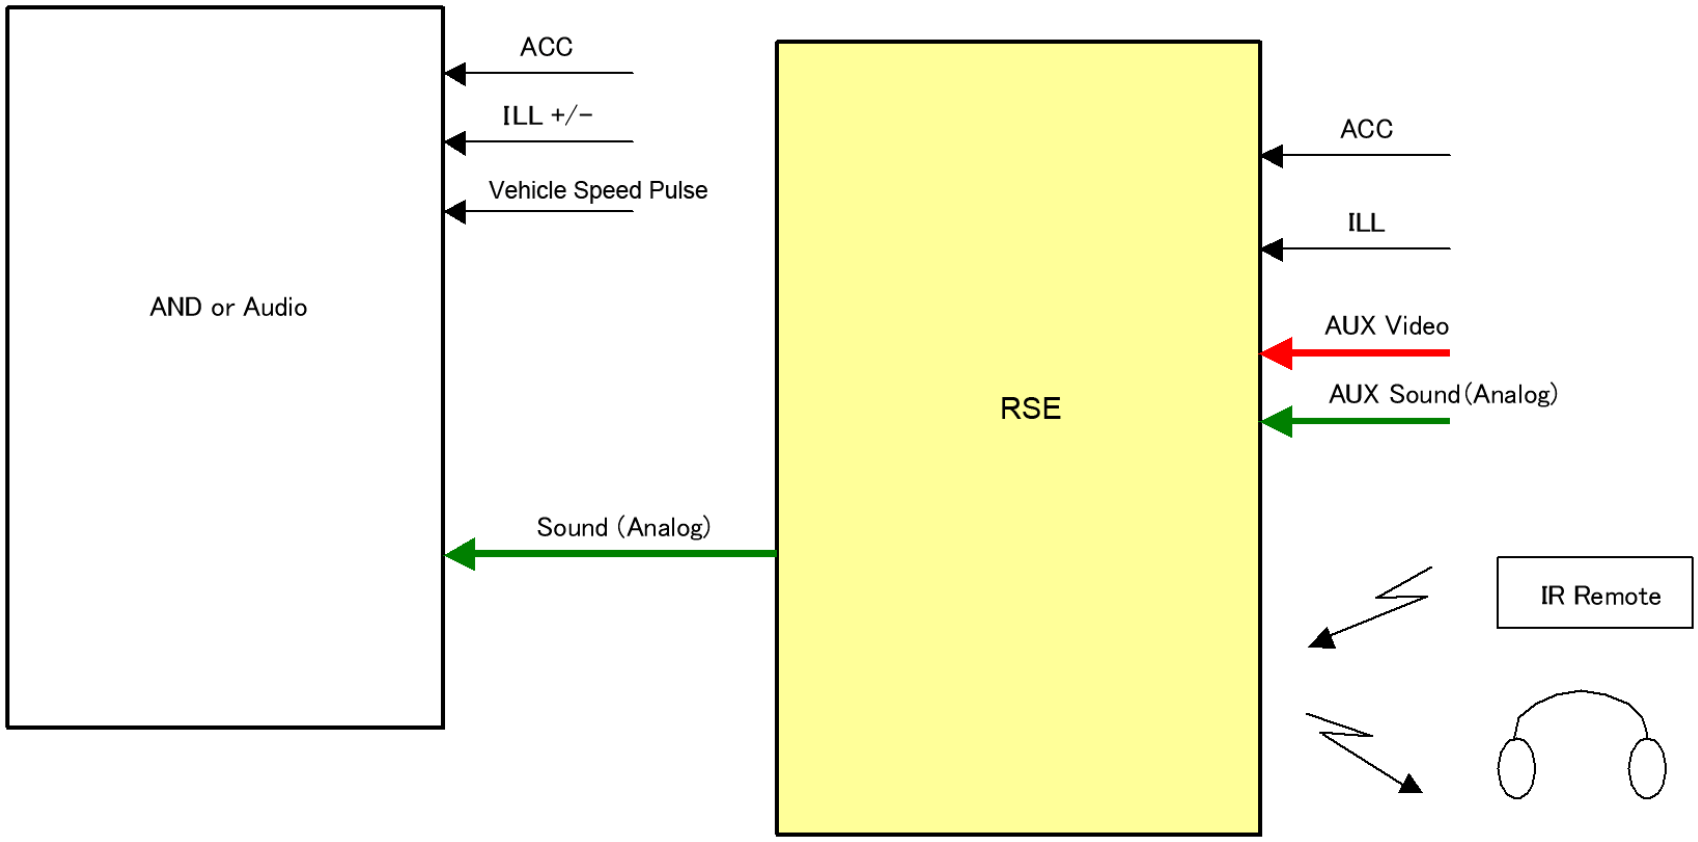

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

BLOCK DIAGRAM

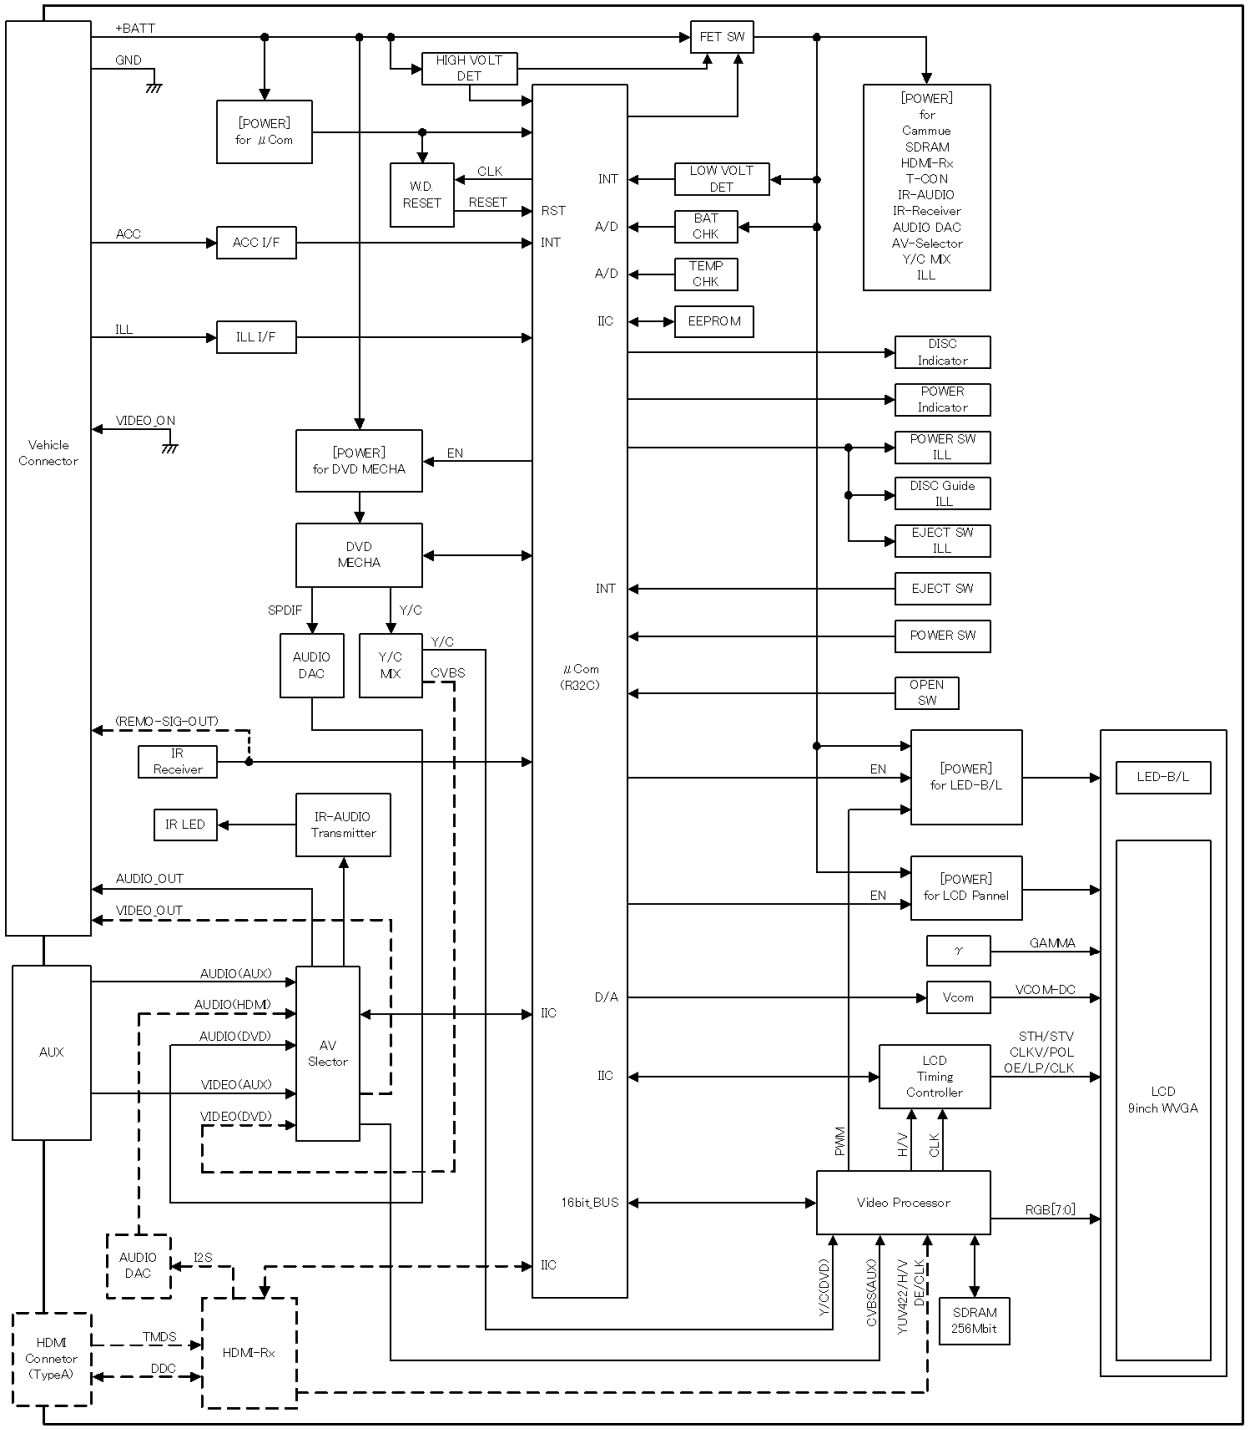

* Dash Line : Reserve

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

DISASSEMBLING PROCEDURES

- **Disassembling procedures**
  In reverse of assembling procedures.
- **Assembling procedures**
  1. Stick M012 to S2-ED-330BE. (2 places)

	Model
(1)	ED-330BE-R1
(2)	ED-330BE-R1-WS

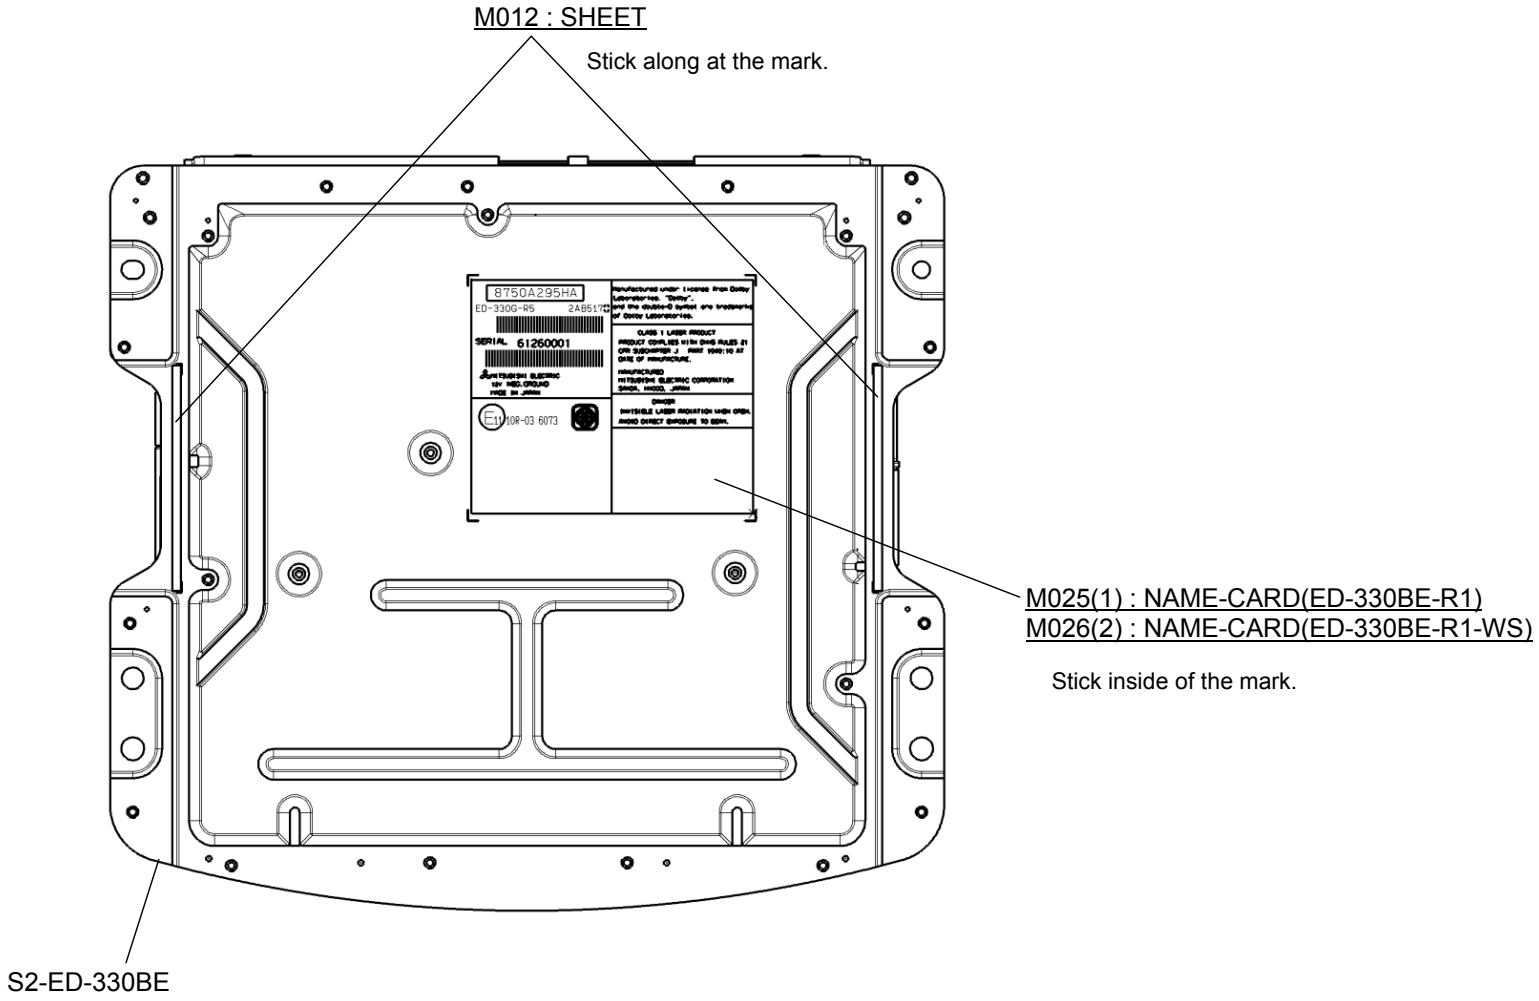

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

DISASSEMBLING PROCEDURES

- **Disassembling procedures**
  In reverse of assembling procedures.
- **Assembling procedures**
  1. Assemble S3-ED-330BE-MO-R2 to S3-ED-330BE, and screw Ⓐ. (4 places) After screw, tightening again.
  2. Stick SHEET-FPC of S3-ED-330BE to S3-ED-330BE-MO-R2 like in the fig.
  3. Insert the FPC of S3-ED-330BE to the connector of S3-ED-330BE-MO-R2, and lock.
  4. Assemble M007 to S3-ED-330BE-MO-R2, and screw Ⓒ. (5 places)
  5. Assemble M019 to S3-ED-330BE-MO-R2.

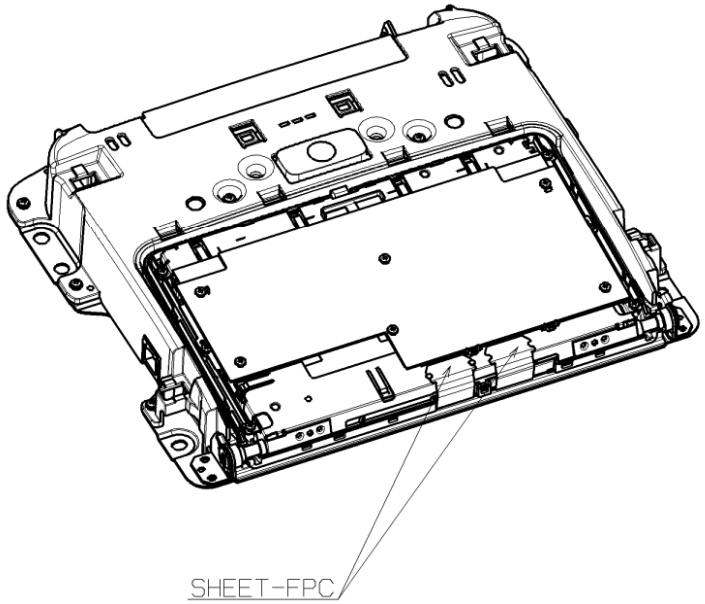

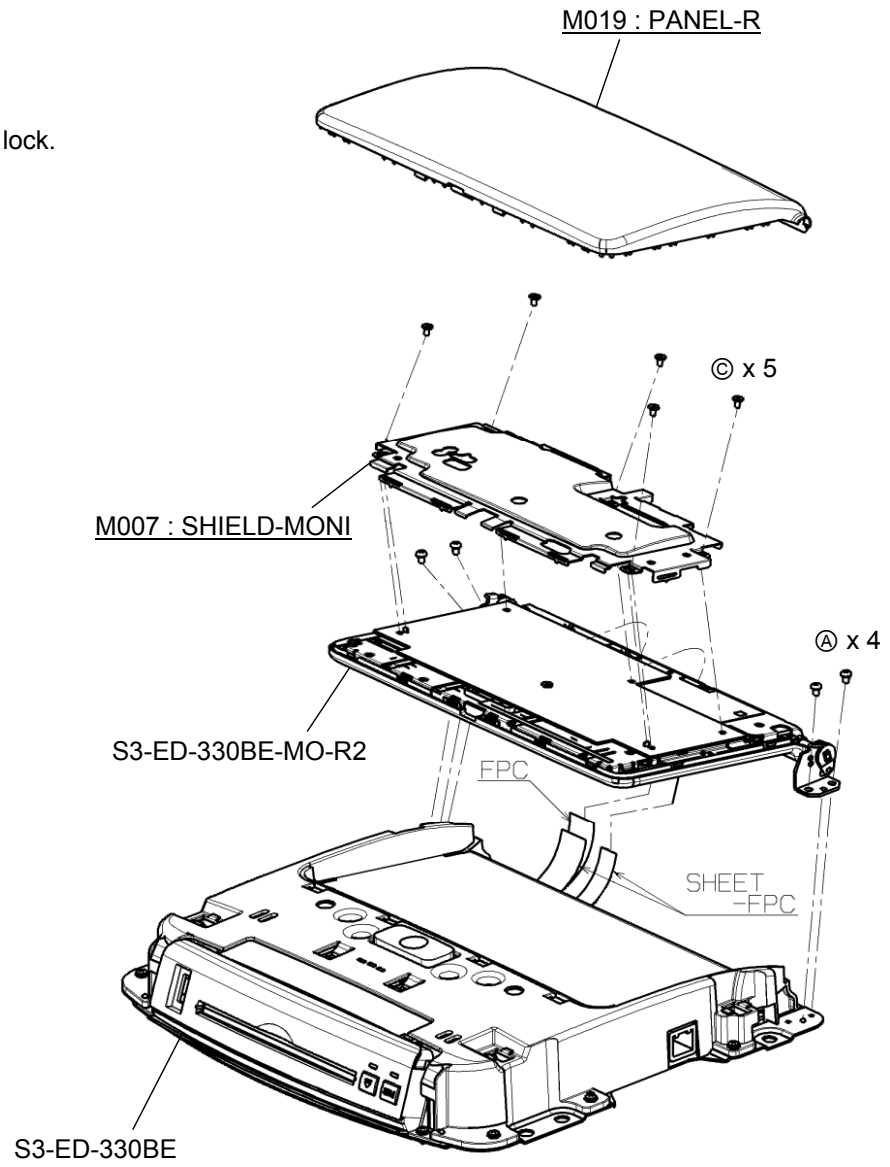

No.	Screw	Tighten torque(N・m)
Ⓐ	M3X4	0.7 +0.2/-0.1
Ⓒ	2.6X4	0.4 +0.2/-0.1

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

DISASSEMBLING PROCEDURES

- **Disassembling procedures**
  In reverse of assembling procedures.
- **Assembling procedures**
  1. Insert M001 to the connector of S4-ED-330BE, and lock.
  2. Insert M004 to M021. (2 places)
  3. Stick M010 and M011 to M021, through M010 and M011 to the hole A, B of M021.
  4. Assemble M021 to S4-ED-330BE, and screw Ⓓ (8 places), Ⓔ (3 places).
     (At the time, through M001 to the hole B of M021.)

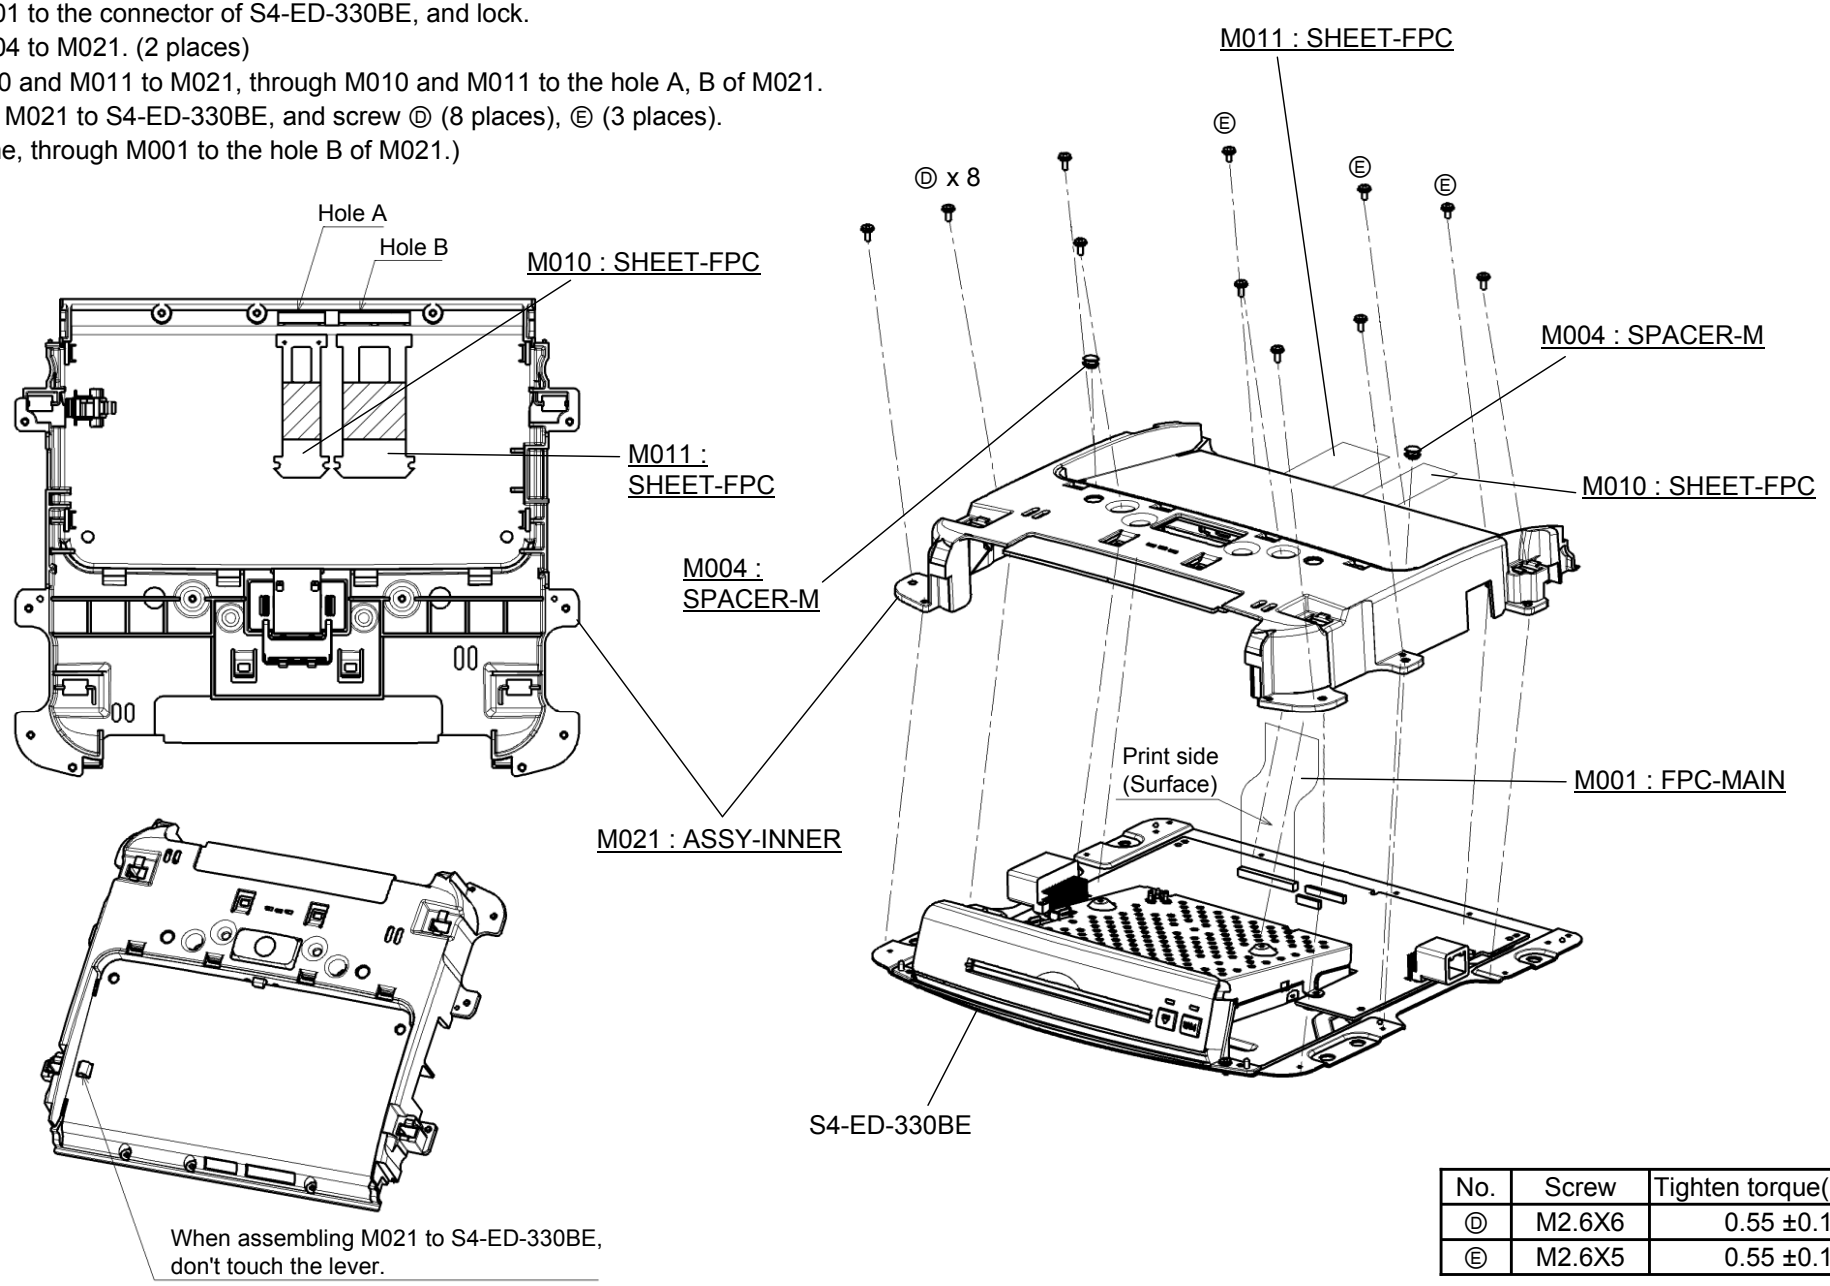

No.	Screw	Tighten torque(N・m)
Ⓓ	M2.6X6	0.55 ±0.1
Ⓔ	M2.6X5	0.55 ±0.1

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

DISASSEMBLING PROCEDURES

- **Disassembling procedures**
  In reverse of assembling procedures.
- **Assembling procedures**
  1. Bend M003 at the protection sheet, insert to the connector of PCB-PANEL, and lock.
  2. Assemble PCB-PANEL to M023, and screw Ⓖ. (3 places)
  3. Assemble M023 to S4-ED-330BE, and screw Ⓓ. (2 places) (When screwing, don't touch the area C of M023.)
  4. Insert M003 to the connector of S4-ED-330BE, and lock. Fix M003 to S4-ED-330BE by TAPE-FILAMENT.
     (See the fig below about operating instructions.)
     Cut TAPE-FILAMENT to 35±2mm.

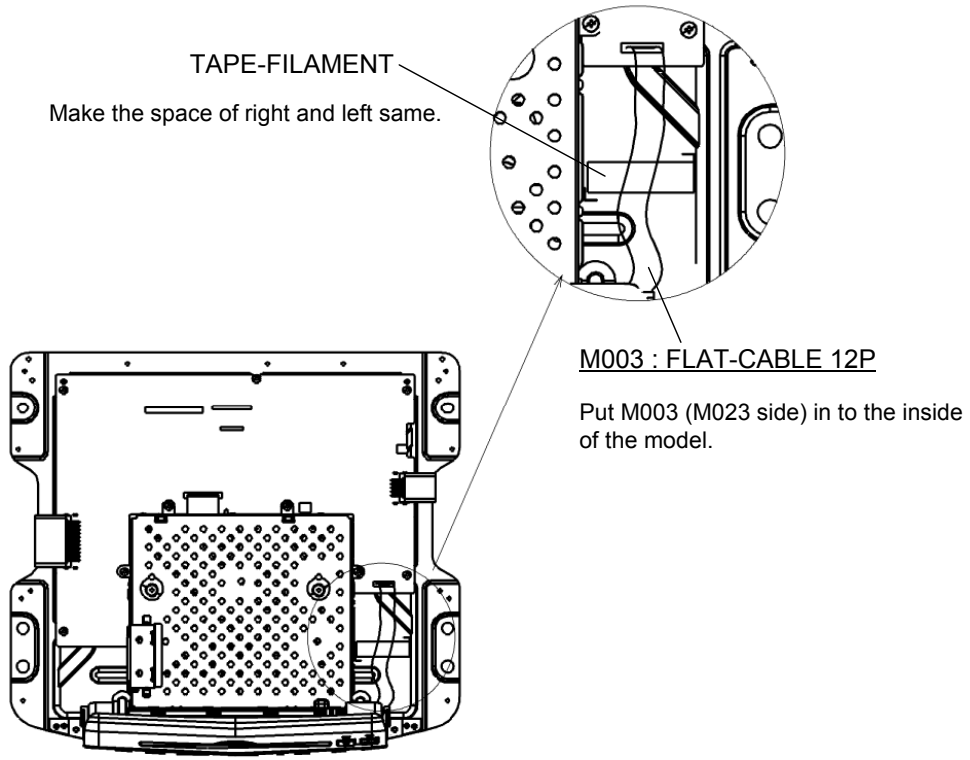

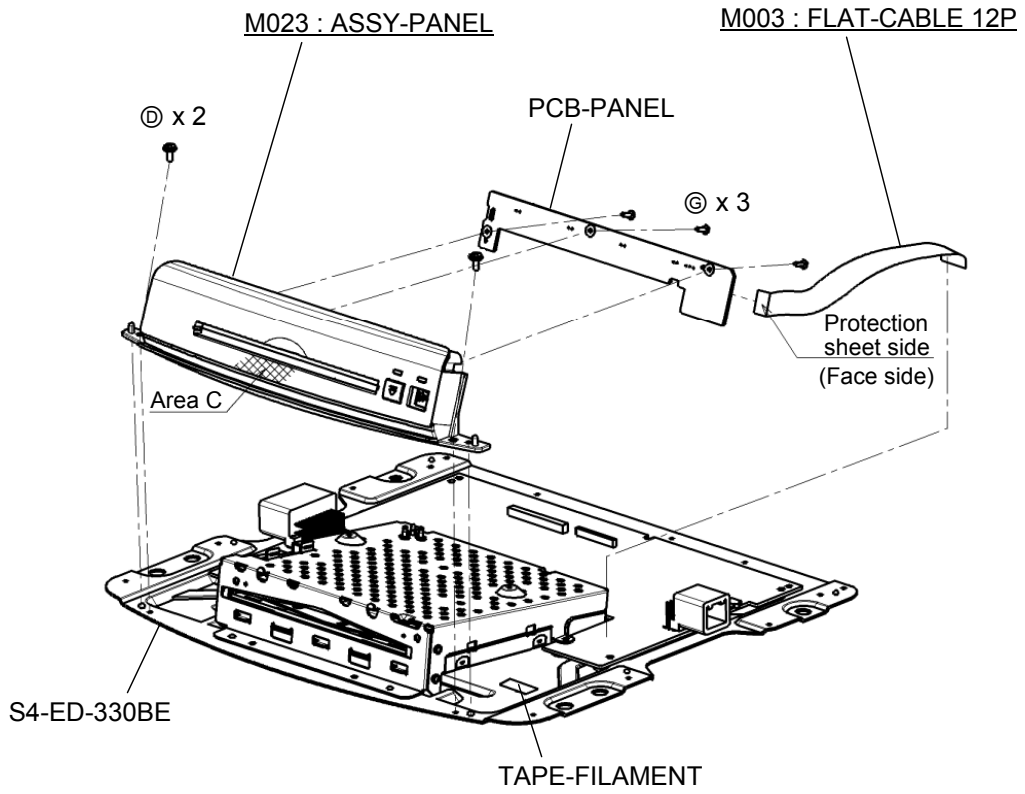

No.	Screw	Tighten torque(N・m)
Ⓓ	M2.6X6	0.55 ±0.1
Ⓖ	2X6	0.2 +0.15/-0.04

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

DISASSEMBLING PROCEDURES

- **Disassembling procedures**
  In reverse of assembling procedures.
- **Assembling procedures**
  1. Assemble PCB-MAIN to M005, screw Ⓗ. (5 places)
  2. Insert M002 to the connector of PCB-MAIN, and lock.
     Unstuck the paper liner, and stick along at the mark of M005.
  3. Assemble M024 to M006, and screw Ⓐ. (4 places)
     (When screwing *1, *2 of Ⓐ, push M024 to not move M024, and screw.)
  4. Stick M017 to M006. (Set the cutout of M017 to hook of M006. See Detail A.)
  5. Assemble M009 to M006, and latch the hooks. (6 places)
  6. Assemble M006 to M005, and screw Ⓗ. (6 places)
  7. Insert M002 to the connector of M024, and lock.
  8. Assemble M008 to M006.
     (Before assembling, check the hooks of M008 is able to insert to the square hole of M006.)

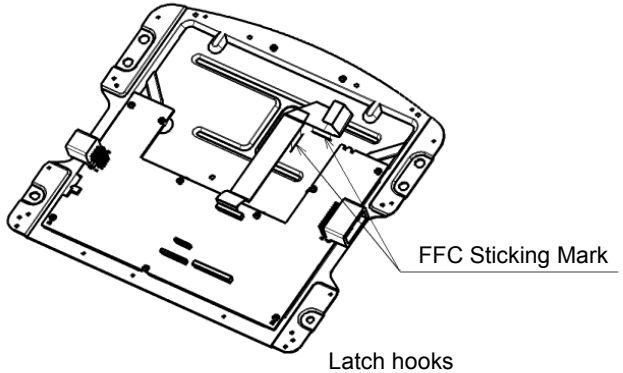

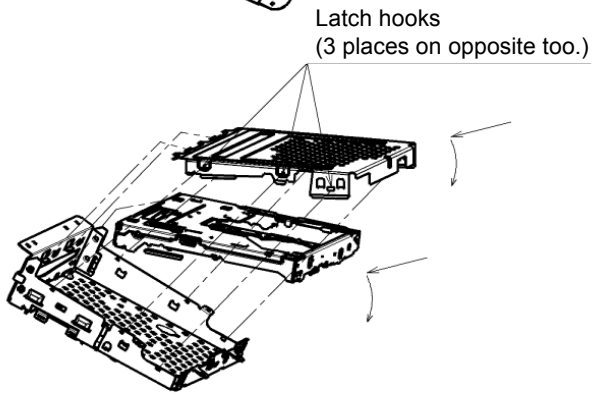

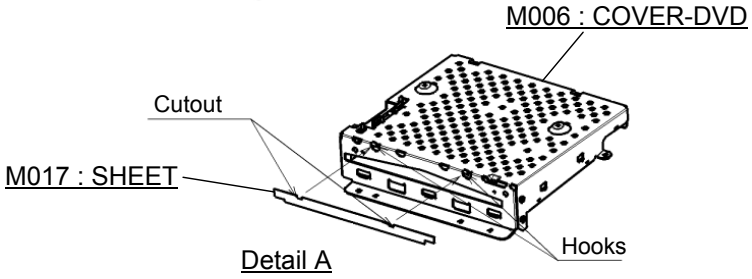

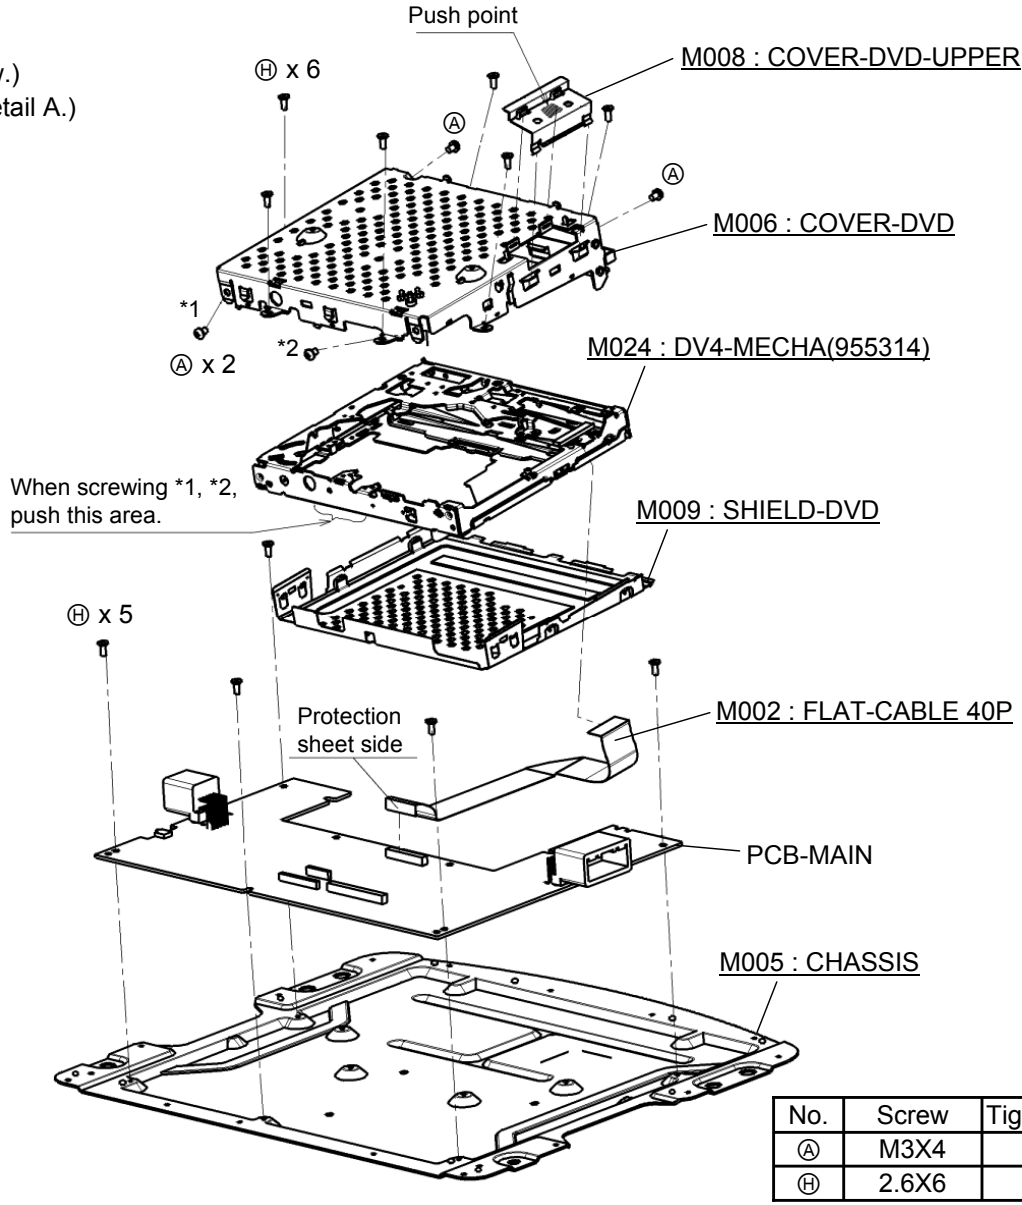

No.	Screw	Tighten torque(N・m)
Ⓐ	M3X4	0.7 +0.2/-0.1
Ⓗ	2.6X6	0.65 ±0.2

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

DISASSEMBLING PROCEDURES

- **Disassembling procedures**
  In reverse of assembling procedures.
- **Assembling procedures**
  1. Assemble M020 to the hooks A (6 places) of M018.
  2. Remove the tape that fixing FPC.
  3. Match the marks, and stick M014 (1 place), M015 (2 places), M016 (2 places) to M022.
  4. Set M022 to the locating boss of M018. Assemble the hook B of M022 and hooks C of M018 (2 places each), and screw Ⓕ. (6 places)
  5. Remove the paper liner from M013, stick to M022.
  6. Assemble PCB-MONI to M022, screw Ⓑ. (1 place)
  7. Insert the FPC of M020 to the connectors (2 places) of PCB-MONI, and lock.

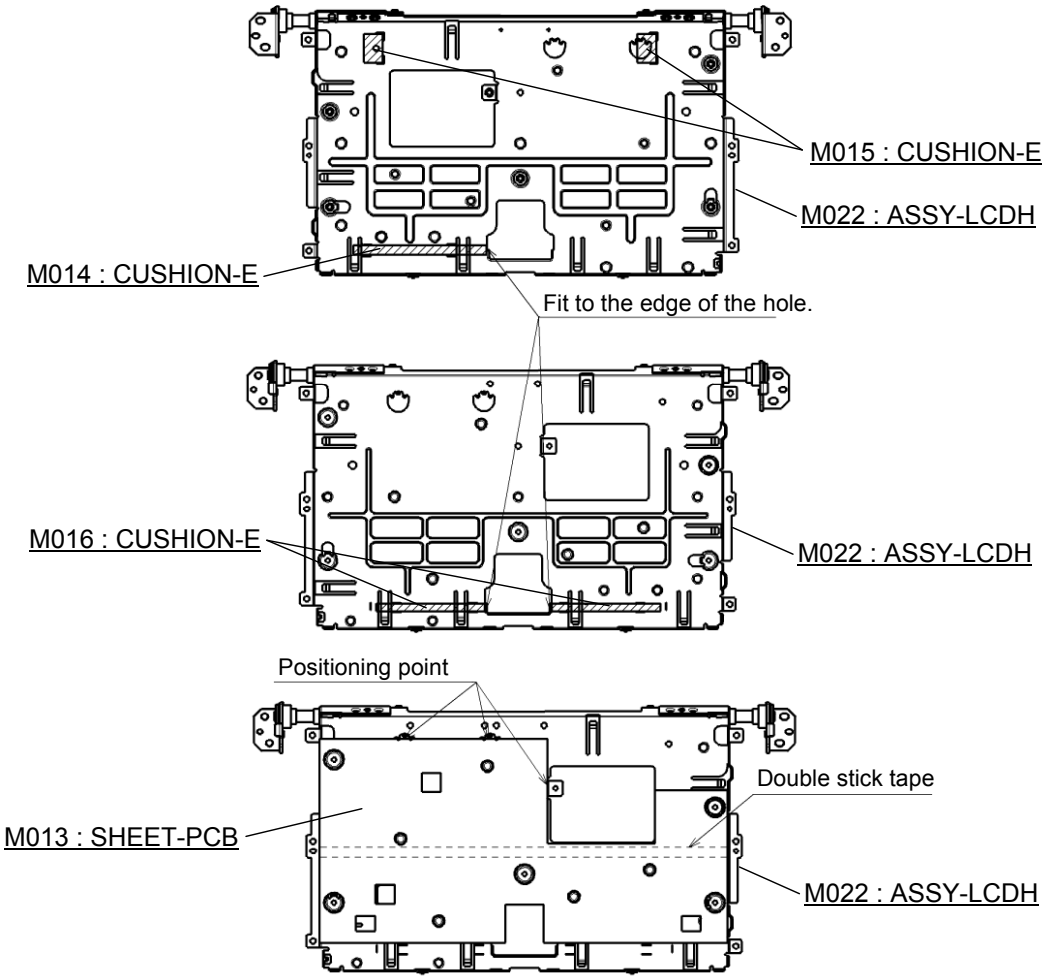

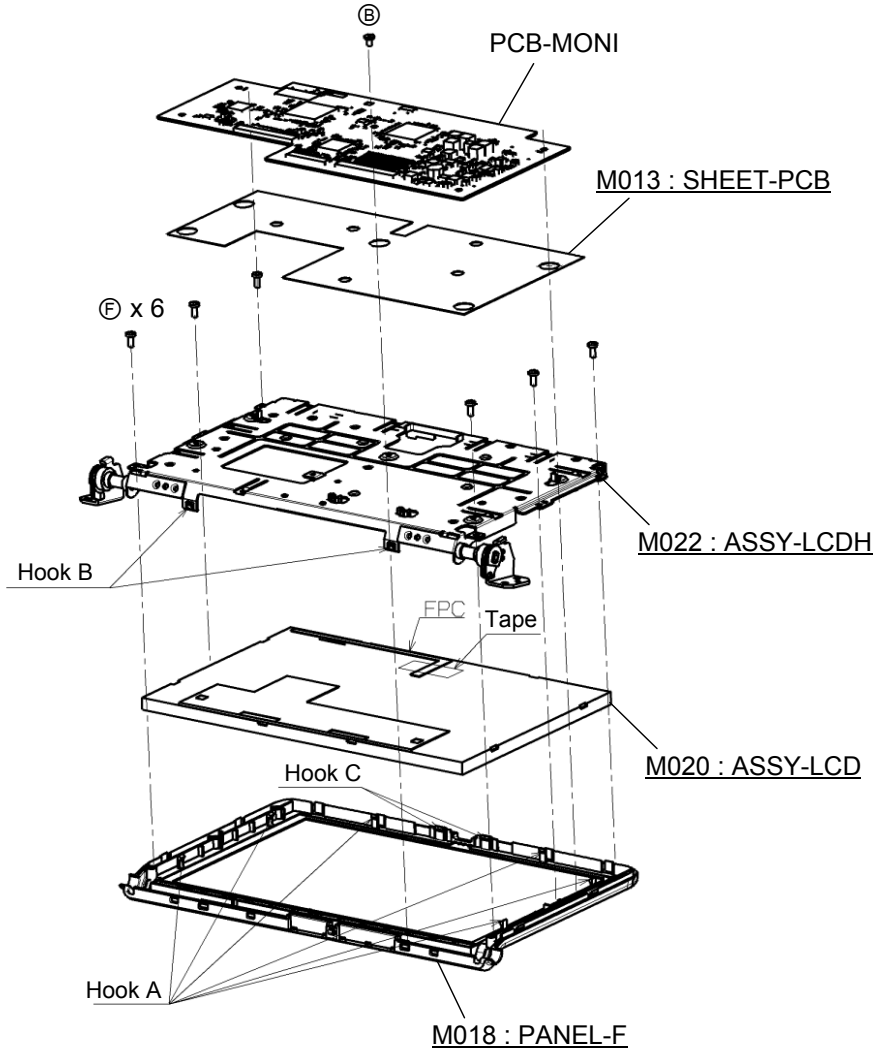

No.	Screw	Tighten torque(N・m)
Ⓑ	M2.6X3	0.4 +0.2/-0.1
Ⓕ	2.6X6	0.4 +0.15/-0.05

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LIST

< ED-330BE-R1 >

Ref. No.	Parts No.	Parts Name	Page
M001	241L91111	FPC-MAIN	P.10
M002	246L52097	FLAT-CABLE 40P	P.12
M003	246L55612	FLAT-CABLE 12P	P.11
M004	550L03610	SPACER-M	P.10
M005	560J43010	CHASSIS	P.12
M006	590J54611	COVER-DVD	P.12
M007	590J54810	SHIELD-MONI	P.9
M008	590J56010	COVER-DVD-UPPER	P.12
M009	594L09310	SHIELD-DVD	P.12
M010	643L92214	SHEET-FPC	P.10
M011	643L92215	SHEET-FPC	P.10
M012	643L94210	SHEET	P.8
M013	643L94311	SHEET-PCB	P.13
M014	643L94410	CUSHION-E	P.13
M015	643L94411	CUSHION-E	P.13
M016	643L94412	CUSHION-E	P.13
M017	643L94610	SHEET	P.12
M018	702J90412	PANEL-F	P.13
M019	702J90510	PANEL-R	P.9
M020	890P19013	ASSY-LCD	P.13
M021	892L52114	ASSY-INNER	P.10
M022	892L52210	ASSY-LCDH	P.13
M023	892L52316	ASSY-PANEL	P.11
*M024	940L28624	DV4-MECHA(955314)	P.12
M025	959M001O5	NAME-CARD(ED-330BE-R1)	P.8
A	653P01044	SCREW-MC-PAN M3X4	-
B	653P01425	SCREW-MC-PAN M2.6X3	-
C	653P03026	SCREW-MC-BIND 2.6X4	-
D	653P07028	SCREW-MC-SEMS M2.6X6	-
E	653P07427	SCREW-MC-SEMS M2.6X5	-
F	653P31028	SCREW-P-PAN 2.6X6	-
G	653P33014	SCREW-P-BIND 2X6	-
H	655P03028	SCREW-D-BIND 2.6X6	-

* Marked part is the ASSY replacement.

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LIST

< ED-330BE-R1-WS >

Ref. No.	Parts No.	Parts Name	Page
M001	241L91111	FPC-MAIN	P.10
M002	246L52097	FLAT-CABLE 40P	P.12
M003	246L55612	FLAT-CABLE 12P	P.11
M004	550L03610	SPACER-M	P.10
M005	560J43010	CHASSIS	P.12
M006	590J54611	COVER-DVD	P.12
M007	590J54810	SHIELD-MONI	P.9
M008	590J56010	COVER-DVD-UPPER	P.12
M009	594L09310	SHIELD-DVD	P.12
M010	643L92214	SHEET-FPC	P.10
M011	643L92215	SHEET-FPC	P.10
M012	643L94210	SHEET	P.8
M013	643L94311	SHEET-PCB	P.13
M014	643L94410	CUSHION-E	P.13
M015	643L94411	CUSHION-E	P.13
M016	643L94412	CUSHION-E	P.13
M017	643L94610	SHEET	P.12
M018	702J90412	PANEL-F	P.13
M019	702J90510	PANEL-R	P.9
M020	890P19013	ASSY-LCD	P.13
M021	892L52114	ASSY-INNER	P.10
M022	892L52210	ASSY-LCDH	P.13
M023	892L52316	ASSY-PANEL	P.11
*M024	940L28624	DV4-MECHA(955314)	P.12
M026	959M001O6	NAME-CARD(ED-330BE-R1-WS)	P.8
A	653P01044	SCREW-MC-PAN M3X4	-
B	653P01425	SCREW-MC-PAN M2.6X3	-
C	653P03026	SCREW-MC-BIND 2.6X4	-
D	653P07028	SCREW-MC-SEMS M2.6X6	-
E	653P07427	SCREW-MC-SEMS M2.6X5	-
F	653P31028	SCREW-P-PAN 2.6X6	-
G	653P33014	SCREW-P-BIND 2X6	-
H	655P03028	SCREW-D-BIND 2.6X6	-

* Marked part is the ASSY replacement.

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C100	181P80827	C-ELECTROLYTIC-CHIP	UUD1C101MCLZMLGS	16V 101M	N937L53610
C101	181P81988	C-ELECTROLYTIC-CHIP	UUD1V391MNLAMLGS	35V 391M	N937L53610
C102	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C103	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C104	181P81988	C-ELECTROLYTIC-CHIP	UUD1V391MNLAMLGS	35V 391M	N937L53610
C105	181P81988	C-ELECTROLYTIC-CHIP	UUD1V391MNLAMLGS	35V 391M	N937L53610
C106	181P81988	C-ELECTROLYTIC-CHIP	UUD1V391MNLAMLGS	35V 391M	N937L53610
C108	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C109	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C110	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C117	181P81988	C-ELECTROLYTIC-CHIP	UUD1V391MNLAMLGS	35V 391M	N937L53610
C136	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C149	141L069O8	C-CERAMIC-CHIP	C2012JB1A335KT	B 10V 335K2125	N937L53610
C150	181P80851	C-ELECTROLYTIC-CHIP	UUD1V220MCLZMLGS	35V 220M	N937L53610
C151	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C152	141L049O6	C-CERAMIC-CHIP	GRM31CB11A475KA01L	B 10V 475K 3216	N937L53610
C157	181P80836	C-ELECTROLYTIC-CHIP	UUD1E101MCLZMLGS	25V 101M	N937L53610
C158	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C1J0	181P80811	C-ELECTROLYTIC-CHIP	UUD1A221MCLZMLGS	10V 221M	N937L53610
C1J1	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C1J2	181P80811	C-ELECTROLYTIC-CHIP	UUD1A221MCLZMLGS	10V 221M	N937L53610
C1J5	141L069O6	C-CERAMIC-CHIP	GRM21BB10J475KA11L	B 6.3V 475K2125	N937L53610
C1J6	141P23030	C-CERAMIC-CHIP	GCJ32ER71H475KA12L	X7R50V475K3225	N937L53610
C1J7	181P81988	C-ELECTROLYTIC-CHIP	UUD1V391MNLAMLGS	35V 391M	N937L53610
C1J8	141L165O0	C-CERAMIC-CHIP	GRM188B10J105KC01D	B6.3V 105K 1608	N937L53610
C1J9	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C1K1	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C1K2	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C1K3	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C1K4	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C1K6	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1K7	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1K8	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1K9	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1L0	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C1L2	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C1L3	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C1L6	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53610
C1L7	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53610
C1L8	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C1L9	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C1M0	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53610
C1M1	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M2	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M3	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M4	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M5	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M6	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M7	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M8	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1M9	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53610
C1N0	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53610
C1N1	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1N2	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1N3	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53610
C1N5	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53610
C1N6	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1N7	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1Q1	181P80827	C-ELECTROLYTIC-CHIP	UUD1C101MCLZMLGS	16V 101M	N937L53610
C1Q3	181P80854	C-ELECTROLYTIC-CHIP	UUD1V101MNLZMLGS	35V 101M	N937L53610
C1Q4	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C1Q5	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C1Q6	181P80324	C-ELECTROLYTIC-CHIP	UWT1C220MCLSHDGB	16V 220M	N937L53610
C1S3	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C1S4	181P80836	C-ELECTROLYTIC-CHIP	UUD1E101MCLZMLGS	25V 101M	N937L53610
C1S5	141M02113	C-CERAMIC-CHIP	GRM32DR71E106KA12E	X7S25V106K3225	N937L53610
C1S6	141L049O6	C-CERAMIC-CHIP	GRM31CB11A475KA01L	B 10V 475K 3216	N937L53610
C1S7	181P80811	C-ELECTROLYTIC-CHIP	UUD1A221MCLZMLGS	10V 221M	N937L53610
C1S8	141L049O6	C-CERAMIC-CHIP	GRM31CB11A475KA01L	B 10V 475K 3216	N937L53610
C1S9	181P80811	C-ELECTROLYTIC-CHIP	UUD1A221MCLZMLGS	10V 221M	N937L53610
C1T0	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C1T2	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53610
C1T4	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C1T5	141P153O1	C-CERAMIC-CHIP	GRM155B11E103KA01D	B 25V 103K1005	N937L53610
C1T6	141L165O0	C-CERAMIC-CHIP	GRM188B10J105KC01D	B6.3V 105K 1608	N937L53610
C1T7	141P23030	C-CERAMIC-CHIP	GCJ32ER71H475KA12L	X7R50V475K3225	N937L53610
C1T8	141P23030	C-CERAMIC-CHIP	GCJ32ER71H475KA12L	X7R50V475K3225	N937L53610
C1T9	181P80854	C-ELECTROLYTIC-CHIP	UUD1V101MNLZMLGS	35V 101M	N937L53610
C1U0	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C1U1	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C1U2	181P80827	C-ELECTROLYTIC-CHIP	UUD1C101MCLZMLGS	16V 101M	N937L53610
C1U3	181P80324	C-ELECTROLYTIC-CHIP	UWT1C220MCLSHDGB	16V 220M	N937L53610
C1U8	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1U9	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1W2	181P80827	C-ELECTROLYTIC-CHIP	UUD1C101MCLZMLGS	16V 101M	N937L53610
C1W3	141P173O3	C-CERAMIC-CHIP	GRM32EB31C476ME15L	B 16V 476M 3225	N937L53610
C1W4	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C1W5	141L063O2	C-CERAMIC-CHIP	GRM21BB11H104KA11L	B 50V 104K2125	N937L53610
C201	141P162O3	C-CERAMIC-CHIP	GRM1552C1H330JZ01D	CH 50V 330J1005	N937L53610
C202	141P162O3	C-CERAMIC-CHIP	GRM1552C1H330JZ01D	CH 50V 330J1005	N937L53610
C203	141P162O3	C-CERAMIC-CHIP	GRM1552C1H330JZ01D	CH 50V 330J1005	N937L53610
C204	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C212	181P80839	C-ELECTROLYTIC-CHIP	UUD1E471MNLZMLGS	25V 471M	N937L53610
C217	181P80839	C-ELECTROLYTIC-CHIP	UUD1E471MNLZMLGS	25V 471M	N937L53610
C219	141L165O0	C-CERAMIC-CHIP	GRM188B10J105KC01D	B6.3V 105K 1608	N937L53610
C221	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C222	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C223	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C224	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C225	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C226	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C227	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C228	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C231	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C233	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C234	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C235	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C237	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C238	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C239	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53610
C240	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C241	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C242	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C243	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C244	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C245	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C2B0	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C2B1	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C2B2	141L165O0	C-CERAMIC-CHIP	GRM188B10J105KC01D	B6.3V 105K 1608	N937L53610
C2B3	181P80813	C-ELECTROLYTIC-CHIP	UUD1A471MNLZMLGS	10V 471M	N937L53610
C2B4	181P80391	C-ELECTROLYTIC-CHIP	UWT0J220MCLSHDGB	6.3V 220M	N937L53610
C2B7	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C2B8	181P80391	C-ELECTROLYTIC-CHIP	UWT0J220MCLSHDGB	6.3V 220M	N937L53610
C2B9	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C306	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C310	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C312	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C317	141P163O9	C-CERAMIC-CHIP	CM05CH151J50AH	CH 50V 151J1005	N937L53610

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C318	141P163O9	C-CERAMIC-CHIP	CM05CH151J50AH	CH 50V 151J1005	N937L53610
C319	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C320	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C322	141P173O2	C-CERAMIC-CHIP	EMK325BJ226KM-T	B 16V 226K 3225	N937L53610
C323	141L049O6	C-CERAMIC-CHIP	GRM31CB11A475KA01L	B 10V 475K 3216	N937L53610
C324	141L049O6	C-CERAMIC-CHIP	GRM31CB11A475KA01L	B 10V 475K 3216	N937L53610
C325	181P80827	C-ELECTROLYTIC-CHIP	UUD1C101MCLZMLGS	16V 101M	N937L53610
C326	141M02113	C-CERAMIC-CHIP	GRM32DR71E106KA12E	X7S25V106K3225	N937L53610
C327	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53610
C329	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C405	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C407	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C408	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C409	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C412	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C416	181P80826	C-ELECTROLYTIC-CHIP	UUD1C471MNLZMLGS	16V 471M	N937L53610
C417	181P80324	C-ELECTROLYTIC-CHIP	UWT1C220MCLSHDGB	16V 220M	N937L53610
C419	181P80326	C-ELECTROLYTIC-CHIP	UWT1C470MCLSHDGB	16V 470M	N937L53610
C421	141L069O5	C-CERAMIC-CHIP	GRM21BB11C105KC01L	B 16V 105K 2125	N937L53610
C422	141P151O3	C-CERAMIC-CHIP	CM05W5R222K50AH	B 50V 222K1005	N937L53610
C423	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C424	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53610
C425	141L069O8	C-CERAMIC-CHIP	C2012JB1A335KT	B 10V 335K2125	N937L53610
C426	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C428	181P80824	C-ELECTROLYTIC-CHIP	UUD1C220MCLYMLGS	16V 220M	N937L53610
C431	141P151O3	C-CERAMIC-CHIP	CM05W5R222K50AH	B 50V 222K1005	N937L53610
C432	181P80826	C-ELECTROLYTIC-CHIP	UUD1C471MNLZMLGS	16V 471M	N937L53610
C435	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C438	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53610
C441	181P80824	C-ELECTROLYTIC-CHIP	UUD1C220MCLYMLGS	16V 220M	N937L53610
C443	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C444	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53610
C445	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53610
C446	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53610
C4A7	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C4A8	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C4A9	141L165O0	C-CERAMIC-CHIP	GRM188B10J105KC01D	B6.3V 105K 1608	N937L53610
C4B1	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C4B2	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C4B3	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C4B4	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C4B7	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C4B8	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C4B9	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C4C0	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C4C1	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C4C2	141L069O5	C-CERAMIC-CHIP	GRM21BB11C105KC01L	B 16V 105K 2125	N937L53610
C4C3	141L069O5	C-CERAMIC-CHIP	GRM21BB11C105KC01L	B 16V 105K 2125	N937L53610
C4C4	141L069O5	C-CERAMIC-CHIP	GRM21BB11C105KC01L	B 16V 105K 2125	N937L53610
C4C7	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C4C9	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C4D1	141L069O6	C-CERAMIC-CHIP	GRM21BB10J475KA11L	B 6.3V 475K2125	N937L53610
C4D4	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C4D6	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C4D8	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53610
C4D9	181P80826	C-ELECTROLYTIC-CHIP	UUD1C471MNLZMLGS	16V 471M	N937L53610
C4E0	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C4E1	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C4E2	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53610
C4E3	181P80324	C-ELECTROLYTIC-CHIP	UWT1C220MCLSHDGB	16V 220M	N937L53610
C4E9	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C651	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C652	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C656	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C657	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53411
C662	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C663	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C664	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C665	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C666	141L169O6	C-CERAMIC-CHIP	GRM188B10J225KE01D	B6.3V 225K1608	N937L53411
C667	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C668	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C669	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C670	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C671	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C673	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C674	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C676	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C677	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C679	141P162O1	C-CERAMIC-CHIP	CM05CH270J50AH	CH 50V 270J1005	N937L53411
C690	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53411
C691	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C692	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C693	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C694	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C695	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C696	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C697	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C698	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6A0	141P153O1	C-CERAMIC-CHIP	GRM155B11E103KA01D	B 25V 103K1005	N937L53411
C6A1	141P161O3	C-CERAMIC-CHIP	GRM1552C1H120JZ01D	CH 50V 120J1005	N937L53411
C6A2	141P161O3	C-CERAMIC-CHIP	GRM1552C1H120JZ01D	CH 50V 120J1005	N937L53411
C6C1	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6C2	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6C3	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6C4	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6C5	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6C6	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6C7	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6C8	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6C9	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6D0	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6F1	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6F2	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6F3	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6F4	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6F5	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6F6	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6F7	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6F8	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6F9	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6G0	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6G1	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6G2	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6G3	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6G4	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6G5	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6G6	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6G7	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6G8	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6G9	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6H0	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6H1	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6H2	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6H3	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6H4	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6H5	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6H6	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C6H7	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6H8	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6H9	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C6J0	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6J2	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6J3	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6J5	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6J6	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6J7	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6J8	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6J9	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K0	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C6K1	141P22310	C-CERAMIC-CHIP	LLL153C80J104ME01E	X6S6.3V104M0510	N937L53411
C6K2	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K3	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K4	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K5	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K6	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K7	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C6K8	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C700	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C701	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C702	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C703	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C704	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C715	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C716	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53411
C718	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C721	141L169O1	C-CERAMIC-CHIP	CM105B684K10AT-N	B10V 684K 1608	N937L53411
C722	141P158O8	C-CERAMIC-CHIP	CM05B473K10AH	B 10V 473K1005	N937L53411
C730	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C731	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C732	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C740	141M02226	C-CERAMIC-CHIP	GCM188R11H104KA42D	R 50V 104K 1608	N937L53411
C752	141L168O8	C-CERAMIC-CHIP	CM105B105K16AT	B 16V 105K 1608	N937L53411
C753	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C771	141L066O3	C-CERAMIC-CHIP	CM21B475K16AT	B 16V 475K 2125	N937L53411
C772	141P161O3	C-CERAMIC-CHIP	GRM1552C1H120JZ01D	CH 50V 120J1005	N937L53411
C773	141P161O3	C-CERAMIC-CHIP	GRM1552C1H120JZ01D	CH 50V 120J1005	N937L53411
C774	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C775	141L164O9	C-CERAMIC-CHIP	CM105W5R474K10AT	B 10V 474K 1608	N937L53411
C776	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C791	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C7C1	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C800	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C801	141L069O5	C-CERAMIC-CHIP	GRM21BB11C105KC01L	B 16V 105K 2125	N937L53610
C802	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C802	141M02226	C-CERAMIC-CHIP	GCM188R11H104KA42D	R 50V 104K 1608	N937L53411
C803	141L162O1	C-CERAMIC-CHIP	GRM188B11H103KA01D	B 50V 103K 1608	N937L53411
C804	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C805	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53610
C806	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53610
C807	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53610
C807	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C809	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C809	141L067O3	C-CERAMIC-CHIP	GRM21BR11E105KA99L	R 25V 105K 2125	N937L53411
C80A	141L168O8	C-CERAMIC-CHIP	CM105B105K16AT	B 16V 105K 1608	N937L53411
C80C	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53411
C80V	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53411
C810	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53610
C810	181P80853	C-ELECTROLYTIC-CHIP	EMZA350ADA470MF61G	35V 470M	N937L53411
C811	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53610
C815	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53411
C820	181P80853	C-ELECTROLYTIC-CHIP	EMZA350ADA470MF61G	35V 470M	N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C821	181P80853	C-ELECTROLYTIC-CHIP	EMZA350ADA470MF61G	35V 470M	N937L53411
C825	181P80853	C-ELECTROLYTIC-CHIP	EMZA350ADA470MF61G	35V 470M	N937L53411
C830	141P151O3	C-CERAMIC-CHIP	CM05W5R222K50AH	B 50V 222K1005	N937L53411
C836	141P172O1	C-CERAMIC-CHIP	GRM32EB31E226KE15L	B 25V 226K 3225	N937L53411
C837	141P153O1	C-CERAMIC-CHIP	GRM155B11E103KA01D	B 25V 103K1005	N937L53411
C838	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C839	141L045O5	C-CERAMIC-CHIP	GRM31CB30J476KE18L	B 6V 476K 3216	N937L53411
C840	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53411
C841	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C842	141L045O5	C-CERAMIC-CHIP	GRM31CB30J476KE18L	B 6V 476K 3216	N937L53411
C843	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C844	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C845	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C846	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C849	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C84A	141P175O2	C-CERAMIC-CHIP	GRM32ER60J107ME20L		N937L53411
C84B	141P175O2	C-CERAMIC-CHIP	GRM32ER60J107ME20L		N937L53411
C84C	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C84D	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C850	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C851	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C852	141P175O2	C-CERAMIC-CHIP	GRM32ER60J107ME20L		N937L53411
C853	141P175O2	C-CERAMIC-CHIP	GRM32ER60J107ME20L		N937L53411
C854	141L049O8	C-CERAMIC-CHIP	CM316B226K06AT-N	B 6.3V 226K3216	N937L53411
C858	141P167O9	C-CERAMIC-CHIP	GRM1552C1H102JA01D	CH 50V 102J1005	N937L53411
C859	141L069O9	C-CERAMIC-CHIP	GRM21BB30J226ME38L	B 6.3V 226M2125	N937L53411
C862	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53411
C863	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53411
C864	141P154O1	C-CERAMIC-CHIP	GRM155B11C153KA01D	B 16V 153K1005	N937L53411
C865	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53411
C866	141P151O3	C-CERAMIC-CHIP	CM05W5R222K50AH	B 50V 222K1005	N937L53411
C867	141P170O2	C-CERAMIC-CHIP	GRM32RB11H105KA01L	B 50V 105K 3225	N937L53411
C868	141M02226	C-CERAMIC-CHIP	GCM188R11H104KA42D	R 50V 104K 1608	N937L53411
C869	141P170O2	C-CERAMIC-CHIP	GRM32RB11H105KA01L	B 50V 105K 3225	N937L53411
C86A	141L047O3	C-CERAMIC-CHIP	GRM31MR71H474KA01L	B 50V 474K 3216	N937L53411
C86B	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53411
C86C	141P167O9	C-CERAMIC-CHIP	GRM1552C1H102JA01D	CH 50V 102J1005	N937L53411
C86E	141L168O8	C-CERAMIC-CHIP	CM105B105K16AT	B 16V 105K 1608	N937L53411
C86F	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53411
C86G	141P167O9	C-CERAMIC-CHIP	GRM1552C1H102JA01D	CH 50V 102J1005	N937L53411
C86H	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53411
C86J	141P151O7	C-CERAMIC-CHIP	GRM155B11H472KA01D	B 50V 472K1005	N937L53411
C86K	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53411
C86L	141P151O3	C-CERAMIC-CHIP	CM05W5R222K50AH	B 50V 222K1005	N937L53411
C86N	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53411
C86P	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53411
C86Q	141L066O3	C-CERAMIC-CHIP	CM21B475K16AT	B 16V 475K 2125	N937L53411
C86T	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C86U	141L168O8	C-CERAMIC-CHIP	CM105B105K16AT	B 16V 105K 1608	N937L53411
C86V	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53411
C86W	141P167O9	C-CERAMIC-CHIP	GRM1552C1H102JA01D	CH 50V 102J1005	N937L53411
C86X	141P173O2	C-CERAMIC-CHIP	EMK325BJ226KM-T	B 16V 226K 3225	N937L53411
C86Y	141P159O2	C-CERAMIC-CHIP	C1005JB1A224KT	B 10V 224K 1005	N937L53411
C871	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53411
C872	141M02113	C-CERAMIC-CHIP	GRM32DR71E106KA12E	X7S25V106K3225	N937L53411
C873	141L067O1	C-CERAMIC-CHIP	CM21B225K25AT	B 25V 225K 2125	N937L53411
C874	141P172O1	C-CERAMIC-CHIP	GRM32EB31E226KE15L	B 25V 226K 3225	N937L53411
C875	141P172O1	C-CERAMIC-CHIP	GRM32EB31E226KE15L	B 25V 226K 3225	N937L53411
C879	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8A2	141P153O1	C-CERAMIC-CHIP	GRM155B11E103KA01D	B 25V 103K1005	N937L53411
C8A3	141P172O1	C-CERAMIC-CHIP	GRM32EB31E226KE15L	B 25V 226K 3225	N937L53411
C8A4	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8A5	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8A7	141P162O7	C-CERAMIC-CHIP	GRM1552C1H470JZ01D	CH 50V 470J1005	N937L53411

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
C8A8	141P163O5	C-CERAMIC-CHIP	GRM1552C1H101JZ01D	CH 50V 101J1005	N937L53411
C8A9	141P151O5	C-CERAMIC-CHIP	CM05W5R332K50AH	B 50V 332K1005	N937L53411
C8AE	141L066O3	C-CERAMIC-CHIP	CM21B475K16AT	B 16V 475K 2125	N937L53411
C8AF	141M02113	C-CERAMIC-CHIP	GRM32DR71E106KA12E	X7S25V106K3225	N937L53411
C8AG	141L168O8	C-CERAMIC-CHIP	CM105B105K16AT	B 16V 105K 1608	N937L53411
C8AH	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53411
C8S0	141L066O3	C-CERAMIC-CHIP	CM21B475K16AT	B 16V 475K 2125	N937L53411
C8S2	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C8S3	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8S4	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8S5	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C8S6	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8S7	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C8S8	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C900	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C901	141L069O7	C-CERAMIC-CHIP	GRM21BB10J106KE01L	B 6.3V 106K2125	N937L53411
C902	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C903	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53411
C904	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C906	141L044O0	C-CERAMIC-CHIP	EMK316BJ106KLFT	B 16V 106K 3216	N937L53411
C907	141P150O9	C-CERAMIC-CHIP	GRM155B11H102KD01D	B 50V 102K1005	N937L53411
C908	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C909	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C910	141P173O2	C-CERAMIC-CHIP	EMK325BJ226KM-T	B 16V 226K 3225	N937L53411
C911	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C912	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C917	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C918	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C919	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C924	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C929	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C930	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C931	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C932	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C933	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C934	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C935	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C936	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C938	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C939	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C940	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C942	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C943	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C945	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C946	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C947	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C949	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C952	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C954	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C956	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C958	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C960	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C962	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C963	141P161O7	C-CERAMIC-CHIP	GRM1552C1H180JZ01D	CH 50V 180J1005	N937L53411
C968	141P170O2	C-CERAMIC-CHIP	GRM32RB11H105KA01L	B 50V 105K 3225	N937L53411
C969	141M02226	C-CERAMIC-CHIP	GCM188R11H104KA42D	R 50V 104K 1608	N937L53411
C970	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C971	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C973	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C975	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411
C989	141L163O8	C-CERAMIC-CHIP	GRM188B11E104KA01D	B 25V 104K 1608	N937L53411
C990	141P172O1	C-CERAMIC-CHIP	GRM32EB31E226KE15L	B 25V 226K 3225	N937L53411
C992	141L069O1	C-CERAMIC-CHIP	CM21B225K10AT-N	B 10V 225K 2125	N937L53411
C993	141P154O6	C-CERAMIC-CHIP	GRM155B31C104KA87D	B 16V 104K 1005	N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
CN700	452P23222	CONNECTOR	7382-6100	22P SIDE	N937L53510
CN703	452P23210	CONNECTOR	7382-5668	10P SIDE 040-3	N937L53510
CN705	452P40170	CONNECTOR-TAPE	501951-7010	70P TOP	N937L53610
CN706	452P38412	CONNECTOR-TAPE	52610-1272	12P TOP	N937L53610
CN709	452P31810	CONNECTOR-TAPE	SM10B-GHS-TB(LF)(SN)	10P SIDE	N937L53610
CN710	452P38568	CONNECTOR-TAPE	FH28E-68S-0.5SH(45)	68P SIDE	N937L53411
CN7A2	452P40140	CONNECTOR-TAPE	501951-4010	40P TOP	N937L53610
CN800	452P35512	CONNECTOR-TAPE	52207-1260	12P SIDE UP	N937L53610
CN800	452P45210	CONNECTOR-TAPE	10FHY-RSM1-GAN-TF(LF)(SN)	10P SIDE	N937L53411
CN900	452P38568	CONNECTOR-TAPE	FH28E-68S-0.5SH(45)	68P SIDE	N937L53411
D100	264P64511	DIODE-CHIP	RR264M-400TR		N937L53610
D102	264P67810	DIODE-CHIP	RF501B2S TL		N937L53610
D104	264P56510	DIODE-ZENER-CHIP	Z5W27VJ/P	5W 27V	N937L53610
D105	264P59835	DIODE-ZENER-CHIP	DZ2J180MYL		N937L53610
D106	264P64511	DIODE-CHIP	RR264M-400TR		N937L53610
D107	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D1J0	264P66510	DIODE-CHIP	RB160M-60TR	1A	N937L53610
D1J1	264P66510	DIODE-CHIP	RB160M-60TR	1A	N937L53610
D1J2	264P66510	DIODE-CHIP	RB160M-60TR	1A	N937L53610
D1J3	264L060O2	DIODE-CHIP	1SS400 TE-61		N937L53610
D1J4	264L060O2	DIODE-CHIP	1SS400 TE-61		N937L53610
D1Q7	264P59828	DIODE-ZENER-CHIP	DZ2J100MYL		N937L53610
D1S4	264P66410	DIODE	RB055L-40 TE25		N937L53610
D1S5	264P59828	DIODE-ZENER-CHIP	DZ2J100MYL		N937L53610
D201	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D202	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D203	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D204	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D206	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D207	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D208	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D209	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D210	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D211	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D212	264P610O1	DIODE-CHIP	MC2850-T111-1		N937L53610
D221	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D222	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D223	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D224	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D225	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D226	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D232	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D233	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D234	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D235	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D236	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D237	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D238	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D239	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D240	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D241	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D242	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D243	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D244	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D245	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D246	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D247	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D248	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D249	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D250	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D251	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D252	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D253	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D254	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
D255	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D256	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D257	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D258	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D259	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D260	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D261	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D262	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D263	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D264	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D266	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D267	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D268	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D269	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D270	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D271	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D272	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D306	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D307	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D308	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D309	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D310	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D311	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D312	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D313	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D316	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D317	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D320	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D323	264L060O1	DIODE-CHIP	1SS355 FNTE-17		N937L53610
D324	264L060O1	DIODE-CHIP	1SS355 FNTE-17		N937L53610
D327	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D328	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D329	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D401	264P64210	DIODE-CHIP	RB520S-30		N937L53610
D700	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D701	264P64210	DIODE-CHIP	RB520S-30		N937L53411
D702	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D703	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D704	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D705	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D706	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D707	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D713	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D714	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D715	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D716	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D717	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D718	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D719	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D720	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D721	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D722	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D723	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D724	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D725	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D726	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D727	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D728	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D729	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D730	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D731	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D732	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D733	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D734	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
D735	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D736	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D737	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D738	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D739	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D740	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D741	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D742	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D743	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D744	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D745	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D747	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D748	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D749	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D750	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D751	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D752	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D753	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53411
D800	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D800	264P75410	DIODE-CHIP	RB060M-30TR		N937L53411
D801	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D802	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D803	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D804	264P72010	DIODE-LE	DNK5307B-1082		N937L53510
D805	264P72010	DIODE-LE	DNK5307B-1082		N937L53510
D806	264P72010	DIODE-LE	DNK5307B-1082		N937L53510
D807	264P72010	DIODE-LE	DNK5307B-1082		N937L53510
D808	264P62913	DIODE-LE-CHIP	SML-311DTT86J	ORANGE	N937L53610
D809	264P62913	DIODE-LE-CHIP	SML-311DTT86J	ORANGE	N937L53610
D810	264P72610	DIODE-LE-CHIP	VFLA1111C-TR	ORANGE	N937L53610
D811	264P72610	DIODE-LE-CHIP	VFLA1111C-TR	ORANGE	N937L53610
D813	264P72610	DIODE-LE-CHIP	VFLA1111C-TR	ORANGE	N937L53610
D814	264P72610	DIODE-LE-CHIP	VFLA1111C-TR	ORANGE	N937L53610
D824	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D825	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D826	264P59824	DIODE-ZENER-CHIP	DZ2J068MYL		N937L53610
D827	264P59821	DIODE-ZENER-CHIP	DZ2J056MYL		N937L53610
D828	264P59824	DIODE-ZENER-CHIP	DZ2J068MYL		N937L53610
D829	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D830	264P59839	DIODE-ZENER-CHIP	DZ2J270MYL		N937L53610
D861	264P75410	DIODE-CHIP	RB060M-30TR		N937L53411
D862	264P64210	DIODE-CHIP	RB520S-30		N937L53411
D863	264P75410	DIODE-CHIP	RB060M-30TR		N937L53411
D8A0	264P64210	DIODE-CHIP	RB520S-30		N937L53411
F101	299P14410	PROTECTOR	11CT 5A	5A	N937L53610
F161	299P14416	PROTECTOR	11CT 2.5A	2.5A	N937L53610
F162	299P14416	PROTECTOR	11CT 2.5A	2.5A	N937L53610
F1A0	299P14413	PROTECTOR-CHIP	11CT 1.25A	1.25A	N937L53610
F1A1	299P14413	PROTECTOR-CHIP	11CT 1.25A	1.25A	N937L53610
F860	299P137O1	PROTECTOR-CHIP	ICP-S0.5TN		N937L53411
IC100	262P28874	IC-TAPE	S-1142B34I-E6T1U	VOLTAGE REG3.4V	N937L53610
IC102	262P08910	IC-TAPE	BD3941FP-E2		N937L53610
IC1J0	262P19410	IC-TAPE	LTC3850IGN#TRA1PBF		N937L53610
IC1J1	266P64010	IC	BD9778F-E2		N937L53610
IC1J2	266P64712	IC-TAPE	NJM2880U1-33(TE1)	3.3V REG. IC	N937L53610
IC201	266P76310	IC-TAPE	NJM2567V(TE1)		N937L53610
IC203	262P16710	IC-TAPE	AK4388VT-E2		N937L53610
IC204	263P91410	IC	TC7WH34FU		N937L53610
IC205	263P07110	IC-TAPE	SN74LVC3G07DCT3	BUFFER	N937L53610
IC303	266L068O9	IC-TAPE	BA3121F-E2		N937L53610
IC404	262P27110	IC-TAPE	AK4901VFY-E2		N937L53610
IC4A1	262P61510	IC	AK4220VQ		N937L53610
IC610	262P18713	IC-TAPE	TC7SG34FU(T5LMBS_E		N937L53411
IC611	262P18713	IC-TAPE	TC7SG34FU(T5LMBS_E		N937L53411

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
IC6C1	262P52012	IC-TRAY	K4S561632J-UP75		N937L53411
IC6F0	262P74910	IC-TRAY	R8A64449DBG	CAMMUE	N937L53411
IC700	263L081O5	IC-TAPE	BR24L02F-WE2	EEPROM	N937L53411
IC701	937L66411	ASSY-ROM			N937L53411
IC702	262P09910	IC	MB3793-30APNF-G-JN-EF6E1		N937L53411
IC703	262P07611	IC-TAPE	TC7SZ07FU(T5LMTSAF	1G NON-INVERTER	N937L53411
IC800	262P33210	IC-TAPE	OZ527ILN-A1-0-TR		N937L53411
IC801	267P868O1	IC-H	TSOP4838SB1	38KHZ TYPE L	N937L53510
IC830	262P26210	IC	LTC3851IGN_TRA1PBF		N937L53411
IC831	262P26712	IC-TAPE	LM26420XMHX/J7003034	DC-DC REGULATOR	N937L53411
IC862	266P74110	IC-TAPE	LT3513IUHF#TRA1PBF	5 OUTPUT REG.	N937L53411
IC8S0	262P77210	IC-TRAY	ML86V8101TBZ0AR		N937L53411
IC902	266P67310	IC-TAPE	NJM2746V(TE1)	OPAMP	N937L53411
L101	351P049O1	COIL-CHOKE	DN-065	EI-19 5A	N937L53510
L1J0	351P10594	COIL-CHOKE-CHIP	7E06NB-100M-T		N937L53610
L1J1	351P07624	COIL-CHOKE-CHIP	CDRH104RNP-100NC		N937L53610
L1J2	351P15081	COIL-CHOKE	CDRH104RNP-3R8NC		N937L53610
L1J3	351P15081	COIL-CHOKE	CDRH104RNP-3R8NC		N937L53610
L1R1	351P13277	COIL-CHOKE-CHIP	7E04NH470M-T		N937L53610
L1R2	351P10577	COIL-CHOKE-CHIP	7E06NB-470M-T		N937L53610
L1R3	351P14781	COIL-CHOKE	CDRH8D38NP-101NC		N937L53610
L1R4	351P086O1	COIL-CHOKE-CHIP	LB2016T2R2M	2R2M 2125	N937L53610
L1R5	351P11783	COIL-CHOKE	CR54-151KC	150UH	N937L53610
L200	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L201	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L202	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L203	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L206	351P091O6	COIL-CHIP	BK1608HS121-T	HS121 1608	N937L53610
L207	351P14579	COIL-CHOKE-CHIP	7E10NA680M	68UH 1.8A	N937L53610
L209	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L210	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L211	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L212	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L213	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L214	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L215	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L216	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L217	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L218	351P12322	COIL-CHIP	BK1005HS601		N937L53610
L219	351P10571	COIL-CHOKE-CHIP	7E06NB-150M-T		N937L53610
L220	351P086O5	COIL-CHOKE-CHIP	LB2016T4R7M	4R7M	N937L53610
L222	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L223	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L224	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L225	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L227	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L228	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L229	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L230	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L231	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L232	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L233	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L234	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L235	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L236	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L237	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L241	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L242	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L243	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L244	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L245	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L246	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L247	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L248	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
L249	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L250	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L251	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L252	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L253	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L254	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L255	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L261	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L262	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53610
L263	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L264	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L265	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L266	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L267	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L268	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L269	351P072O8	COIL-CHIP	FBMJ4516HS111-T	HS111 4516	N937L53610
L270	351P12430	COIL-CHIP	FBMH3216HM501NT	HM501 3216	N937L53610
L271	351P072O8	COIL-CHIP	FBMJ4516HS111-T	HS111 4516	N937L53610
L272	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53610
L276	351P093O5	COIL-CHIP	BK1608HM102-T	HM102 1608	N937L53610
L277	351P093O5	COIL-CHIP	BK1608HM102-T	HM102 1608	N937L53610
L278	351P093O5	COIL-CHIP	BK1608HM102-T	HM102 1608	N937L53610
L279	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L280	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L281	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L282	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L283	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L284	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L285	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L287	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53610
L288	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L289	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L302	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L303	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L306	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L307	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L310	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53610
L401	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53610
L403	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53610
L4A2	351P086O5	COIL-CHOKE-CHIP	LB2016T4R7M	4R7M	N937L53610
L691	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53411
L692	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L6C1	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L6C2	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L6F0	284P005O3	FILTER-CHIP	BLM21PG221SN1D		N937L53411
L6F1	284P005O3	FILTER-CHIP	BLM21PG221SN1D		N937L53411
L6F2	284P005O3	FILTER-CHIP	BLM21PG221SN1D		N937L53411
L6F3	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L6F4	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L700	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53411
L701	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L702	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L703	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L704	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L705	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L706	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L707	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L708	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L709	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L710	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L711	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L712	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L713	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L714	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
L715	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L716	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L717	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L718	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L720	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L721	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L725	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L726	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L727	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L728	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L729	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L731	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L732	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L734	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L735	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L736	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L737	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L738	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L739	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L740	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L741	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L742	351P093O5	COIL-CHIP	BK1608HM102-T	HM102 1608	N937L53411
L743	351P093O5	COIL-CHIP	BK1608HM102-T	HM102 1608	N937L53411
L744	351P093O5	COIL-CHIP	BK1608HM102-T	HM102 1608	N937L53411
L745	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L747	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L748	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L749	351P094O3	COIL-CHIP	BK1608HS241-T	HS241 1608	N937L53411
L74A	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L7C1	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L7C2	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L7C3	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L7C4	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L7C5	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L7C6	351P091O8	COIL-CHIP	BK1608HS601-T	HS601 1608	N937L53411
L800	351P086O1	COIL-CHOKE-CHIP	LB2016T2R2M	2R2M 2125	N937L53610
L801	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L801	351P10594	COIL-CHOKE-CHIP	7E06NB-100M-T		N937L53411
L802	284P01811	FILTER-CHIP	BLM18PG121SN1D		N937L53411
L803	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L804	351P086O5	COIL-CHOKE-CHIP	LB2016T4R7M	4R7M	N937L53610
L805	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L806	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L830	351P072O8	COIL-CHIP	FBMJ4516HS111-T	HS111 4516	N937L53411
L832	351P17265	COIL-CHOKE-CHIP	7E08N-4R7N-RA	4.7UH	N937L53411
L833	351P072O8	COIL-CHIP	FBMJ4516HS111-T	HS111 4516	N937L53411
L834	284P005O3	FILTER-CHIP	BLM21PG221SN1D		N937L53411
L835	351P10567	COIL-CHOKE-CHIP	7E06NB-6R8M-T		N937L53411
L836	351P10565	COIL-CHOKE-CHIP	7E06NB-4R7M-T		N937L53411
L837	284P005O3	FILTER-CHIP	BLM21PG221SN1D		N937L53411
L838	284P005O3	FILTER-CHIP	BLM21PG221SN1D		N937L53411
L839	351P12411	COIL-CHIP	FBMH1608HM221-T	HM221 1608	N937L53411
L867	351P085O7	COIL-CHOKE-CHIP	LB2016T1R0M	1R0M 2125	N937L53411
L868	351P13269	COIL-CHOKE-CHIP	7E04NH100M-T		N937L53411
L869	351P085O7	COIL-CHOKE-CHIP	LB2016T1R0M	1R0M 2125	N937L53411
L86A	351P14178	COIL-CHOKE-CHIP	7E06LS560M		N937L53411
L86C	351P13267	COIL-CHOKE-CHIP	7E04NH6R8M-T		N937L53411
L86D	351P10565	COIL-CHOKE-CHIP	7E06NB-4R7M-T		N937L53411
L86E	351P14867	COIL-CHOKE-CHIP	NLV25T-6R8J-EFD	6.8UH	N937L53411
L86F	351P085O7	COIL-CHOKE-CHIP	LB2016T1R0M	1R0M 2125	N937L53411
L86G	351P085O7	COIL-CHOKE-CHIP	LB2016T1R0M	1R0M 2125	N937L53411
L888	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53610
L8S0	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53411
L8S1	351P095O4	COIL-CHOKE-CHIP	BK1608LM252-T		N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
L900	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L901	351P087O3	COIL-CHOKE-CHIP	LB2016T220K	220K	N937L53411
L902	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L909	351P12342	COIL-CHIP	BK1005LL241		N937L53411
L910	351P12342	COIL-CHIP	BK1005LL241		N937L53411
L911	351P12342	COIL-CHIP	BK1005LL241		N937L53411
L917	351P096O3	COIL-CHIP	BK1608TS102-T	TS102 1608	N937L53411
L922	351P12342	COIL-CHIP	BK1005LL241		N937L53411
L924	351P12342	COIL-CHIP	BK1005LL241		N937L53411
L925	351P12342	COIL-CHIP	BK1005LL241		N937L53411
L930	351P087O7	COIL-CHOKE-CHIP	LB2016T470K	470K	N937L53411
LA902	351P19341	COIL-CHIP	BK20104L181-TS	4L181 2010	N937L53411
LA907	351P19341	COIL-CHIP	BK20104L181-TS	4L181 2010	N937L53411
LA911	351P19341	COIL-CHIP	BK20104L181-TS	4L181 2010	N937L53411
LA913	351P19341	COIL-CHIP	BK20104L181-TS	4L181 2010	N937L53411
LA915	351P19341	COIL-CHIP	BK20104L181-TS	4L181 2010	N937L53411
LA916	351P19341	COIL-CHIP	BK20104L181-TS	4L181 2010	N937L53411
LC681	409P05311	LC-MULTIPLE-CHIP	MEM2012T50R0T3S1	CUT OFF 50MHZ	N937L53411
LC800	409P034O3	LC-MULTIPLE	NFM21HC223R1H3D		N937L53411
P702	442P02010	TERMINAL-CHIP	OG-502620RK	H 1.0MM-1.6MM	N937L53411
P712	442P02010	TERMINAL-CHIP	OG-502620RK	H 1.0MM-1.6MM	N937L53411
Q103	260P68810	TRANSISTOR-TAPE	2SJ530-91(S)TL-E	-TAPE	N937L53610
Q104	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q105	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q107	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q108	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q1J0	260P69410	TRANSISTOR-TAPE	SP8K3 TB		N937L53610
Q1J1	260P69410	TRANSISTOR-TAPE	SP8K3 TB		N937L53610
Q1P1	260P15810	TRANSISTOR	2SC5881 TL-Q,R		N937L53610
Q1R5	260P15810	TRANSISTOR	2SC5881 TL-Q,R		N937L53610
Q201	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q202	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q301	260P14210	TRANSISTOR-CHIP	DTC623TU		N937L53610
Q302	260P14210	TRANSISTOR-CHIP	DTC623TU		N937L53610
Q303	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q304	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q401	260L059O5	TRANSISTOR-CHIP	DTC124EUA		N937L53610
Q402	260L059O3	TRANSISTOR-CHIP	DTA143EUA		N937L53610
Q403	260P14210	TRANSISTOR-CHIP	DTC623TU		N937L53610
Q404	260P14210	TRANSISTOR-CHIP	DTC623TU		N937L53610
Q407	260L042O2	TRANSISTOR-CHIP	DTA144TKAT146		N937L53610
Q408	260L059O5	TRANSISTOR-CHIP	DTC124EUA		N937L53610
Q409	260M06210	TRANSISTOR-CHIP	2SA1576A R_S		N937L53610
Q410	260L032O2	TRANSISTOR-CHIP	2SD1664 T100 Q_R		N937L53610
Q411	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q412	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q413	260M06210	TRANSISTOR-CHIP	2SA1576A R_S		N937L53610
Q414	260P14210	TRANSISTOR-CHIP	DTC623TU		N937L53610
Q415	260P14210	TRANSISTOR-CHIP	DTC623TU		N937L53610
Q416	260L042O2	TRANSISTOR-CHIP	DTA144TKAT146		N937L53610
Q417	260L059O5	TRANSISTOR-CHIP	DTC124EUA		N937L53610
Q418	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53610
Q419	260L059O3	TRANSISTOR-CHIP	DTA143EUA		N937L53610
Q420	260L042O2	TRANSISTOR-CHIP	DTA144TKAT146		N937L53610
Q421	260L042O2	TRANSISTOR-CHIP	DTA144TKAT146		N937L53610
Q702	260M06214	TRANSISTOR-CHIP	DTA114EUA T106		N937L53411
Q703	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53411
Q704	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53411
Q705	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53411
Q706	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53411
Q707	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53411
Q800	260M06210	TRANSISTOR-CHIP	2SA1576A R_S		N937L53610
Q801	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53610
Q802	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53610

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
Q804	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q805	260M06210	TRANSISTOR-CHIP	2SA1576A R_S		N937L53610
Q806	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53610
Q807	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53610
Q808	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53610
Q809	260M06212	TRANSISTOR-CHIP	2SC4081 T106 R_S		N937L53610
Q810	260M06210	TRANSISTOR-CHIP	2SA1576A R_S		N937L53610
Q830	260P69410	TRANSISTOR-TAPE	SP8K3 TB		N937L53411
Q861	260M06217	TRANSISTOR-CHIP	DTC114EUA T106		N937L53411
Q862	260P20410	TRANSISTOR-CHIP	TPC6502(T5LMBS-S_F		N937L53411
Q863	260L047O1	TRANSISTOR-CHIP	2SA1369-T113-1G	PB-FREE(SN-2BI)	N937L53411
Q875	260M06220	TRANSISTOR-CHIP	DTC144EUA		N937L53411
Q876	260M06220	TRANSISTOR-CHIP	DTC144EUA		N937L53411
Q900	260P22510	TRANSISTOR-CHIP	IMZ4 FS T108		N937L53411
R120	103P52620	R-CHIP	RPL18TR27J	1/2W R27J 3216	N937L53610
R121	103P52620	R-CHIP	RPL18TR27J	1/2W R27J 3216	N937L53610
R122	103P52620	R-CHIP	RPL18TR27J	1/2W R27J 3216	N937L53610
R124	103L243O5	R-CHIP	RMC1/8682JATP	1/4W 682J 3216	N937L53610
R125	103L241O3	R-CHIP	RMC1/8101JATP	1/4W 101J 3216	N937L53610
R126	103L191O9	R-CHIP	RMC1/10331JATP	1/8W 331J 2125	N937L53610
R128	103L193O7	R-CHIP	RMC1/10103JATP	1/8W 103J 2125	N937L53610
R130	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R131	103L192O5	R-CHIP	RMC1/10102JATP	1/8W 102J 2125	N937L53610
R132	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R137	103L193O7	R-CHIP	RMC1/10103JATP	1/8W 103J 2125	N937L53610
R138	103L412O5	R-CHIP	RGC1/10C102DTP	1/10W 102D 2125	N937L53610
R139	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R140	103L413O0	R-CHIP	RGC1/10C272DTP	1/10W 272D 2125	N937L53610
R141	103P52620	R-CHIP	RPL18TR27J	1/2W R27J 3216	N937L53610
R1J0	103L298O4	R-CHIP	RMC1/162R2JTP	1/10W 2R2J 1608	N937L53610
R1J1	103P55618	R-CHIP	UCR18EVHJSR011	1/2W R011J 3216	N937L53610
R1J2	103P55618	R-CHIP	UCR18EVHJSR011	1/2W R011J 3216	N937L53610
R1J3	103L298O8	R-CHIP	RMC1/164R7JTP	1/10W 4R7J 1608	N937L53610
R1J4	103L298O8	R-CHIP	RMC1/164R7JTP	1/10W 4R7J 1608	N937L53610
R1J7	103P150O1	R-CHIP	RMC1/16S100JTH	1/16W 100J 1005	N937L53610
R1J8	103P150O1	R-CHIP	RMC1/16S100JTH	1/16W 100J 1005	N937L53610
R1K0	103P150O1	R-CHIP	RMC1/16S100JTH	1/16W 100J 1005	N937L53610
R1K1	103P150O1	R-CHIP	RMC1/16S100JTH	1/16W 100J 1005	N937L53610
R1K3	103P113O9	R-CHIP	RGC1/16SC153DTH	1/16W 153D 1005	N937L53610
R1K4	103P113O9	R-CHIP	RGC1/16SC153DTH	1/16W 153D 1005	N937L53610
R1K5	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R1K6	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53610
R1K7	103P113O9	R-CHIP	RGC1/16SC153DTH	1/16W 153D 1005	N937L53610
R1K8	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53610
R1K9	103P114O7	R-CHIP	RGC1/16SC683DTH	1/16W 683D 1005	N937L53610
R1L0	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53610
R1L1	103P111O5	R-CHIP	RGC1/16SC151DTH	1/16W 151D 1005	N937L53610
R1L2	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R1L3	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R1L4	103P113O0	R-CHIP	RGC1/16SC272DTH	1/16W 272D 1005	N937L53610
R1L5	103P114O7	R-CHIP	RGC1/16SC683DTH	1/16W 683D 1005	N937L53610
R1L6	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53610
R1L7	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R1P9	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R1Q0	103L292O5	R-CHIP	RMC1/16102JTP	1/10W 102J 1608	N937L53610
R1R7	103P114O6	R-CHIP	RGC1/16SC563DTH	1/16W 563D 1005	N937L53610
R1R8	103P114O7	R-CHIP	RGC1/16SC683DTH	1/16W 683D 1005	N937L53610
R1R9	103P114O4	R-CHIP	RGC1/16SC393DTH	1/16W 393D 1005	N937L53610
R1S0	103P112O8	R-CHIP	RGC1/16SC182DTH	1/16W 182D 1005	N937L53610
R1S1	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R1S2	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53610
R1S3	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53610
R1S5	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53610
R1S9	103L292O5	R-CHIP	RMC1/16102JTP	1/10W 102J 1608	N937L53610

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R1T0	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R1T2	103L249O9	R-CHIP	RMC1/8JPATP	1/4W 0 3216	N937L53610
R1T3	103L290O1	R-CHIP	RMC1/16100JTP	1/10W 100J 1608	N937L53610
R1T4	103L290O1	R-CHIP	RMC1/16100JTP	1/10W 100J 1608	N937L53610
R200	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R200	103P110O9	R-CHIP	HPC03KT470D	1/16W 470D 1005	N937L53411
R201	103P150O9	R-CHIP	RMC1/16S470JTH	1/16W 470J 1005	N937L53610
R201	103P110O9	R-CHIP	HPC03KT470D	1/16W 470D 1005	N937L53411
R202	103P150O9	R-CHIP	RMC1/16S470JTH	1/16W 470J 1005	N937L53610
R202	103P110O9	R-CHIP	HPC03KT470D	1/16W 470D 1005	N937L53411
R203	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R204	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R206	103P150O9	R-CHIP	RMC1/16S470JTH	1/16W 470J 1005	N937L53610
R207	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R208	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R209	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R210	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R210	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53411
R211	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R212	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R215	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R216	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R218	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R219	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R220	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R221	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R222	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R223	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R224	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R225	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R226	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R227	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R227	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R240	103P151O1	R-CHIP	RMC1/16S680JTH	1/16W 680J 1005	N937L53610
R241	103P151O1	R-CHIP	RMC1/16S680JTH	1/16W 680J 1005	N937L53610
R242	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R243	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R244	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53610
R245	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53610
R246	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53610
R247	103L191O3	R-CHIP	RMC1/10101JATP	1/8W 101J 2125	N937L53610
R248	103L191O3	R-CHIP	RMC1/10101JATP	1/8W 101J 2125	N937L53610
R249	103L192O1	R-CHIP	RMC1/10471JATP	1/8W 471J 2125	N937L53610
R250	103L191O3	R-CHIP	RMC1/10101JATP	1/8W 101J 2125	N937L53610
R251	103L192O1	R-CHIP	RMC1/10471JATP	1/8W 471J 2125	N937L53610
R252	103L191O3	R-CHIP	RMC1/10101JATP	1/8W 101J 2125	N937L53610
R253	103L291O3	R-CHIP	RMC1/16101JTP	1/10W 101J 1608	N937L53610
R254	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R255	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R2B1	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R2B2	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53610
R2B4	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53610
R2C3	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53610
R2C6	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R2D1	103P150O9	R-CHIP	RMC1/16S470JTH	1/16W 470J 1005	N937L53610
R2D2	103P150O9	R-CHIP	RMC1/16S470JTH	1/16W 470J 1005	N937L53610
R2D3	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R2D4	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R2D5	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R2D6	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R2D7	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R2D8	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R306	103L242O1	R-CHIP	RMC1/8471JATP	1/4W 471J 3216	N937L53610
R308	103L242O1	R-CHIP	RMC1/8471JATP	1/4W 471J 3216	N937L53610

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R310	103L194O5	R-CHIP	RMC1/10473JATP	1/8W 473J 2125	N937L53610
R311	103L194O5	R-CHIP	RMC1/10473JATP	1/8W 473J 2125	N937L53610
R313	103L191O9	R-CHIP	RMC1/10331JATP	1/8W 331J 2125	N937L53610
R317	103L242O1	R-CHIP	RMC1/8471JATP	1/4W 471J 3216	N937L53610
R318	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R320	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R321	103L242O1	R-CHIP	RMC1/8471JATP	1/4W 471J 3216	N937L53610
R327	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R328	103L299O9	R-CHIP	RMC1/16JTP	1/10W 0 1608	N937L53610
R329	103L243O7	R-CHIP	RMC1/8103JATP	1/4W 103J 3216	N937L53610
R330	103L192O9	R-CHIP	RMC1/10222JATP	1/8W 222J 2125	N937L53610
R331	103L299O9	R-CHIP	RMC1/16JTP	1/10W 0 1608	N937L53610
R332	103L243O7	R-CHIP	RMC1/8103JATP	1/4W 103J 3216	N937L53610
R333	103L192O9	R-CHIP	RMC1/10222JATP	1/8W 222J 2125	N937L53610
R351	103L191O3	R-CHIP	RMC1/10101JATP	1/8W 101J 2125	N937L53610
R352	103P504O5	R-CHIP	RMC1/16473FTP	1/10W 473F 1608	N937L53610
R353	103L191O3	R-CHIP	RMC1/10101JATP	1/8W 101J 2125	N937L53610
R354	103P504O5	R-CHIP	RMC1/16473FTP	1/10W 473F 1608	N937L53610
R357	103L194O5	R-CHIP	RMC1/10473JATP	1/8W 473J 2125	N937L53610
R358	103L194O5	R-CHIP	RMC1/10473JATP	1/8W 473J 2125	N937L53610
R360	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R361	103L249O9	R-CHIP	RMC1/8JPATP	1/4W 0 3216	N937L53610
R362	103L191O9	R-CHIP	RMC1/10331JATP	1/8W 331J 2125	N937L53610
R3A1	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R400	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R401	103L199O9	R-CHIP	RMC1/10JPATP	1/8W 0 2125	N937L53610
R403	103L249O9	R-CHIP	RMC1/8JPATP	1/4W 0 3216	N937L53610
R407	103L192O1	R-CHIP	RMC1/10471JATP	1/8W 471J 2125	N937L53610
R408	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R411	103P154O5	R-CHIP	RMC1/16S473JTH	1/16W 473J 1005	N937L53610
R412	103L192O1	R-CHIP	RMC1/10471JATP	1/8W 471J 2125	N937L53610
R429	103L292O9	R-CHIP	RMC1/16222JTP	1/10W 222J 1608	N937L53610
R431	103P152O7	R-CHIP	RMC1/16S152JTH	1/16W 152J 1005	N937L53610
R432	103P154O2	R-CHIP	RMC1/16S273JTH	1/16W 273J 1005	N937L53610
R433	103P152O7	R-CHIP	RMC1/16S152JTH	1/16W 152J 1005	N937L53610
R434	103L292O5	R-CHIP	RMC1/16102JTP	1/10W 102J 1608	N937L53610
R435	103L291O3	R-CHIP	RMC1/16101JTP	1/10W 101J 1608	N937L53610
R436	103P154O2	R-CHIP	RMC1/16S273JTH	1/16W 273J 1005	N937L53610
R437	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R438	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53610
R439	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R440	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R441	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R442	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R443	103P151O9	R-CHIP	RMC1/16S331JTH	1/16W 331J 1005	N937L53610
R444	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R445	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R446	103L190O4	R-CHIP	RMC1/10180JATP	1/8W 180J 2125	N937L53610
R447	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R448	103P113O0	R-CHIP	RGC1/16SC272DTH	1/16W 272D 1005	N937L53610
R449	103L190O4	R-CHIP	RMC1/10180JATP	1/8W 180J 2125	N937L53610
R450	103P152O1	R-CHIP	RMC1/16S471JTH	1/16W 471J 1005	N937L53610
R451	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R453	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R454	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R463	103P112O5	R-CHIP	RGC1/16SC102DTH	1/16W 102D 1005	N937L53610
R464	103P112O5	R-CHIP	RGC1/16SC102DTH	1/16W 102D 1005	N937L53610
R4B5	103P163O8	R-CHIP	RMC1/16S123FTH	1/16W 123F 1005	N937L53610
R4B8	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R4B9	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R4C1	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R4C2	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R4C3	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R4C4	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R4D0	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53610
R4D6	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53610
R4D9	103L249O9	R-CHIP	RMC1/8JPATP	1/4W 0 3216	N937L53610
R4E0	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R4E9	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R4F4	103L292O6	R-CHIP	RMC1/16122JTP	1/10W 122J 1608	N937L53610
R4F5	103L292O8	R-CHIP	RMC1/16182JTP	1/10W 182J 1608	N937L53610
R4F6	103L292O1	R-CHIP	RMC1/16471JTP	1/10W 471J 1608	N937L53610
R4F7	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53610
R4F9	103L292O6	R-CHIP	RMC1/16122JTP	1/10W 122J 1608	N937L53610
R4G1	103L292O1	R-CHIP	RMC1/16471JTP	1/10W 471J 1608	N937L53610
R4G2	103L292O8	R-CHIP	RMC1/16182JTP	1/10W 182J 1608	N937L53610
R4G6	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R4H4	103P52826	R-CHIP	RGC1/16C122DTP	1/16W 122D 1608	N937L53610
R4H5	103P52845	R-CHIP	HPC05CT473D	1/16W 473D 1608	N937L53610
R4H6	103P52845	R-CHIP	HPC05CT473D	1/16W 473D 1608	N937L53610
R4H7	103P52826	R-CHIP	RGC1/16C122DTP	1/16W 122D 1608	N937L53610
R650	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R651	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53411
R653	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53411
R654	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R655	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R656	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R663	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R665	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R672	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R681	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53411
R682	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R683	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53411
R684	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R685	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R686	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R687	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R689	103P511O1	R-CHIP	RMC1/16750FTP	1/10W 750F 1608	N937L53411
R691	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R694	103P151O1	R-CHIP	RMC1/16S680JTH	1/16W 680J 1005	N937L53411
R698	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R6A4	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6A5	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R6A6	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R6A7	103P152O7	R-CHIP	RMC1/16S152JTH	1/16W 152J 1005	N937L53411
R6A8	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6A9	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6AA	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6AD	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R6AE	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R6AF	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R6AH	103P151O1	R-CHIP	RMC1/16S680JTH	1/16W 680J 1005	N937L53411
R6AJ	103P151O1	R-CHIP	RMC1/16S680JTH	1/16W 680J 1005	N937L53411
R6G1	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6G2	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6G3	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6G4	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6G8	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6GA	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6GB	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6GC	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6H4	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6H5	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6H8	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6H9	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6J4	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R6J5	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R702	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R703	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R704	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R705	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R706	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R718	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R719	103P504O2	R-CHIP	RMC1/16273FTP	1/10W 273F 1608	N937L53411
R720	103P503O1	R-CHIP	RPC05T332F	1/10W 332F 1608	N937L53411
R725	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R733	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R742	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R746	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R749	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R751	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R757	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R758	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R771	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53411
R773	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R774	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R776	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R777	103P110O9	R-CHIP	HPC03KT470D	1/16W 470D 1005	N937L53411
R7A6	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7A7	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53411
R7AA	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R7C8	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7D1	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7D2	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7D4	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7D7	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7D8	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7D9	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7E2	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7E3	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7E7	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7F6	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7F8	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7G0	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7G1	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7G2	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7G3	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7G4	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7G5	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7G6	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R7G7	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R7G8	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R7G9	103P153O1	R-CHIP	RMC1/16S332JTH	1/16W 332J 1005	N937L53411
R7H1	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7J0	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7J2	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R7J6	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53411
R7J8	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53411
R7K2	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R7K3	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R7K5	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7K6	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7K7	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7K9	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7L0	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7L1	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7L3	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7L5	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53411
R7L6	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7L9	103P114O5	R-CHIP	RGC1/16SC473DTH	1/16W 473D 1005	N937L53411
R7M0	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M1	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R7M2	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53411
R7M3	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M4	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M5	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M6	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M7	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M8	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7M9	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R7N1	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7N3	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7N5	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7N6	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R7N9	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R801	103L291O3	R-CHIP	RMC1/16101JTP	1/10W 101J 1608	N937L53411
R802	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R802	103P125O8	R-CHIP	HPC03CT624D		N937L53411
R803	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R803	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R804	103P114O0	R-CHIP	RGC1/16SC183DTH	1/16W 183D 1005	N937L53610
R804	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R805	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53610
R805	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R806	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R807	103P113O2	R-CHIP	RGC1/16SC392DTH	1/16W 392D 1005	N937L53610
R807	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R808	103P112O8	R-CHIP	RGC1/16SC182DTH	1/16W 182D 1005	N937L53610
R808	103P164O4	R-CHIP	RPC03T393F	1/16W 393F 1005	N937L53411
R809	103P113O5	R-CHIP	RGC1/16SC682DTH	1/16W 682D 1005	N937L53610
R809	103P164O4	R-CHIP	RPC03T393F	1/16W 393F 1005	N937L53411
R80A	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R80C	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R80E	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R80F	103P123O5	R-CHIP	HPC03CT752D	1/16W 752D 1005	N937L53411
R80G	103P114O5	R-CHIP	RGC1/16SC473DTH	1/16W 473D 1005	N937L53411
R80H	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R80J	103L294O0	R-CHIP	RMC1/16183JTP	1/10W 183J 1608	N937L53411
R810	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53610
R811	103P113O2	R-CHIP	RGC1/16SC392DTH	1/16W 392D 1005	N937L53610
R812	103P112O7	R-CHIP	RGC1/16SC152DTH	1/16W 152D 1005	N937L53610
R823	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R825	103L299O9	R-CHIP	RMC1/16JTP	1/10W 0 1608	N937L53610
R832	103P55618	R-CHIP	UCR18EVHJSR011	1/2W R011J 3216	N937L53411
R833	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53411
R834	103P114O7	R-CHIP	RGC1/16SC683DTH	1/16W 683D 1005	N937L53411
R835	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R838	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R839	103L298O8	R-CHIP	RMC1/164R7JTP	1/10W 4R7J 1608	N937L53411
R840	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R841	103L292O5	R-CHIP	RMC1/16102JTP	1/10W 102J 1608	N937L53411
R842	103L292O5	R-CHIP	RMC1/16102JTP	1/10W 102J 1608	N937L53411
R843	103P52844	R-CHIP	HPC05CT393D	1/16W 393D 1608	N937L53610
R843	103P113O4	R-CHIP	RGC1/16SC562DTH	1/16W 562D 1005	N937L53411
R844	103P52833	R-CHIP	RGC1/16C472DTP	1/16W 472D 1608	N937L53610
R844	103P122O1	R-CHIP	RGC1/16SC511DTH	1/16W 511D 1005	N937L53411
R845	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R845	103P113O8	R-CHIP	RGC1/16SC123DTH	1/16W 123D 1005	N937L53411
R846	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R846	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R847	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R847	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R848	103P52842	R-CHIP	RGC1/16C273DTP	1/16W 273D 1608	N937L53610
R848	103P150O1	R-CHIP	RMC1/16S100JTH	1/16W 100J 1005	N937L53411
R849	103P52831	R-CHIP	RGC1/16C332DTP	1/16W 332D 1608	N937L53610
R850	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R851	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R852	103L299O9	R-CHIP	RMC1/16JTP	1/10W 0 1608	N937L53610
R861	103P115O8	R-CHIP	HPC03CT564D	1/16W 564D 1005	N937L53411
R862	103P114O5	R-CHIP	RGC1/16SC473DTH	1/16W 473D 1005	N937L53411
R863	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R864	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R868	103P113O3	R-CHIP	RGC1/16SC472DTH	1/16W 472D 1005	N937L53411
R869	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R86A	103L243O3	R-CHIP	RMC1/8472JATP	1/4W 472J 3216	N937L53411
R86C	103L243O3	R-CHIP	RMC1/8472JATP	1/4W 472J 3216	N937L53411
R86D	103P155O3	R-CHIP	RMC1/16S224JTH	1/16W 224J 1005	N937L53411
R86E	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R86F	103P115O0	R-CHIP	RGC1/16SC124DTH	1/16W 124D 1005	N937L53411
R86G	103P152O5	R-CHIP	RMC1/16S102JTH	1/16W 102J 1005	N937L53411
R86H	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R86J	103P153O5	R-CHIP	RMC1/16S682JTH	1/16W 682J 1005	N937L53411
R86K	103P126O0	R-CHIP	RGC1/16SC914DTH	1/16W 914D 1005	N937L53411
R86L	103P114O5	R-CHIP	RGC1/16SC473DTH	1/16W 473D 1005	N937L53411
R86M	103P113O3	R-CHIP	RGC1/16SC472DTH	1/16W 472D 1005	N937L53411
R86N	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R86P	103P114O5	R-CHIP	RGC1/16SC473DTH	1/16W 473D 1005	N937L53411
R86Q	103P112O9	R-CHIP	RGC1/16SC222DTH	1/16W 222D 1005	N937L53411
R86R	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R86S	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R86T	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R86U	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R86V	103P115O8	R-CHIP	HPC03CT564D	1/16W 564D 1005	N937L53411
R86W	103P114O3	R-CHIP	RGC1/16SC333DTH	1/16W 333D 1005	N937L53411
R86X	103P114O9	R-CHIP	RGC1/16SC104DTH	1/16W 104D 1005	N937L53411
R86Z	103L293O7	R-CHIP	RMC1/16103JTP	1/10W 103J 1608	N937L53411
R870	103P116O0	R-CHIP	RGC1/16SC824DTH	1/16W 824D 1005	N937L53411
R879	103P113O8	R-CHIP	RGC1/16SC123DTH	1/16W 123D 1005	N937L53411
R880	103P151O6	R-CHIP	RPC03T181J	1/16W 181J 1005	N937L53411
R881	103P151O6	R-CHIP	RPC03T181J	1/16W 181J 1005	N937L53411
R882	103P151O6	R-CHIP	RPC03T181J	1/16W 181J 1005	N937L53411
R883	103P151O6	R-CHIP	RPC03T181J	1/16W 181J 1005	N937L53411
R884	103P151O6	R-CHIP	RPC03T181J	1/16W 181J 1005	N937L53411
R885	103P151O6	R-CHIP	RPC03T181J	1/16W 181J 1005	N937L53411
R886	103P150O5	R-CHIP	RMC1/16S220JTH	1/16W 220J 1005	N937L53411
R887	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R8A0	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R8A1	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53610
R8A1	103P114O0	R-CHIP	RGC1/16SC183DTH	1/16W 183D 1005	N937L53411
R8A2	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53610
R8A2	103P114O5	R-CHIP	RGC1/16SC473DTH	1/16W 473D 1005	N937L53411
R8A3	103P153O3	R-CHIP	RMC1/16S472JTH	1/16W 472J 1005	N937L53610
R8A3	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R8A4	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53610
R8B3	103L298O8	R-CHIP	RMC1/164R7JTP	1/10W 4R7J 1608	N937L53411
R8B5	103P113O9	R-CHIP	RGC1/16SC153DTH	1/16W 153D 1005	N937L53411
R8B7	103P150O1	R-CHIP	RMC1/16S100JTH	1/16W 100J 1005	N937L53411
R8SK	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R8SL	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R8SM	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R8SS	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R8SX	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R8SY	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R8WB	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R902	103P110O9	R-CHIP	HPC03KT470D	1/16W 470D 1005	N937L53411
R904	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R905	103L293O7	R-CHIP	RMC1/16103JTP	1/10W 103J 1608	N937L53411
R906	103L294O9	R-CHIP	RMC1/16104JTP	1/10W 104J 1608	N937L53411
R908	103P120O6	R-CHIP	HPC03KT300D	1/16W 300D 1005	N937L53411
R909	103P120O8	R-CHIP	HPC03KT430D	1/16W 430D 1005	N937L53411

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
R910	103P111O9	R-CHIP	RGC1/16SC331DTH	1/16W 331D 1005	N937L53411
R911	103P121O7	R-CHIP	RGC1/16SC241DTH	1/16W 241D 1005	N937L53411
R913	103P111O0	R-CHIP	HPC03KT560D	1/16W 560D 1005	N937L53411
R914	103P121O8	R-CHIP	HPC03CT301D	1/16W 301D 1005	N937L53411
R916	103P111O2	R-CHIP	HPC03KT820D	1/16W 820D 1005	N937L53411
R917	103P111O3	R-CHIP	RGC1/16SC101DTH	1/16W 101D 1005	N937L53411
R919	103P120O9	R-CHIP	HPC03KT510D	1/16W 510D 1005	N937L53411
R920	103P111O4	R-CHIP	RGC1/16SC121DTH	1/16W 121D 1005	N937L53411
R924	103P110O6	R-CHIP	HPC03KT270D	1/16W 270D 1005	N937L53411
R925	103P111O2	R-CHIP	HPC03KT820D	1/16W 820D 1005	N937L53411
R927	103P111O3	R-CHIP	RGC1/16SC101DTH	1/16W 101D 1005	N937L53411
R928	103P121O1	R-CHIP	HPC03KT750D	1/16W 750D 1005	N937L53411
R929	103P121O4	R-CHIP	HPC03CT131D	1/16W 131D 1005	N937L53411
R930	103P121O6	R-CHIP	RGC1/16SC201DTH	1/16W 201D 1005	N937L53411
R933	103P111O5	R-CHIP	RGC1/16SC151DTH	1/16W 151D 1005	N937L53411
R934	103P110O7	R-CHIP	HPC03KT330D	1/16W 330D 1005	N937L53411
R937	103P121O2	R-CHIP	HPC03KT910D	1/16W 910D 1005	N937L53411
R938	103P111O4	R-CHIP	RGC1/16SC121DTH	1/16W 121D 1005	N937L53411
R939	103P121O1	R-CHIP	HPC03KT750D	1/16W 750D 1005	N937L53411
R940	103P121O4	R-CHIP	HPC03CT131D	1/16W 131D 1005	N937L53411
R941	103P121O7	R-CHIP	RGC1/16SC241DTH	1/16W 241D 1005	N937L53411
R944	103P120O9	R-CHIP	HPC03KT510D	1/16W 510D 1005	N937L53411
R945	103P122O3	R-CHIP	RGC1/16SC751DTH	1/16W 751D 1005	N937L53411
R947	103P120O6	R-CHIP	HPC03KT300D	1/16W 300D 1005	N937L53411
R948	103P111O3	R-CHIP	RGC1/16SC101DTH	1/16W 101D 1005	N937L53411
R949	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R951	103P111O0	R-CHIP	HPC03KT560D	1/16W 560D 1005	N937L53411
R952	103P121O4	R-CHIP	HPC03CT131D	1/16W 131D 1005	N937L53411
R955	103P121O1	R-CHIP	HPC03KT750D	1/16W 750D 1005	N937L53411
R956	103P111O5	R-CHIP	RGC1/16SC151DTH	1/16W 151D 1005	N937L53411
R958	103P111O0	R-CHIP	HPC03KT560D	1/16W 560D 1005	N937L53411
R959	103P112O3	R-CHIP	HPC03CT681D	1/16W 681D 1005	N937L53411
R960	103P121O9	R-CHIP	HPC03CT361D	1/16W 361D 1005	N937L53411
R961	103P121O7	R-CHIP	RGC1/16SC241DTH	1/16W 241D 1005	N937L53411
R963	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R964	103P120O6	R-CHIP	HPC03KT300D	1/16W 300D 1005	N937L53411
R965	103P120O8	R-CHIP	HPC03KT430D	1/16W 430D 1005	N937L53411
R968	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R975	103L299O9	R-CHIP	RMC1/16JTP	1/10W 0 1608	N937L53411
R987	103L290O1	R-CHIP	RMC1/16100JTP	1/10W 100J 1608	N937L53411
R989	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R990	103P113O7	R-CHIP	RGC1/16SC103DTH	1/16W 103D 1005	N937L53411
R992	103P151O3	R-CHIP	RMC1/16S101JTH	1/16W 101J 1005	N937L53411
R993	103P151O7	R-CHIP	RMC1/16S221JTH	1/16W 221J 1005	N937L53411
R997	103P115O8	R-CHIP	HPC03CT564D	1/16W 564D 1005	N937L53411
R998	103P114O2	R-CHIP	RGC1/16SC273DTH	1/16W 273D 1005	N937L53411
R999	103L198O0	R-CHIP	RMC1/101R0JATP	1/8W 1R0J 2125	N937L53411
R9A0	103P113O9	R-CHIP	RGC1/16SC153DTH	1/16W 153D 1005	N937L53411
R9A1	103L290O1	R-CHIP	RMC1/16100JTP	1/10W 100J 1608	N937L53411
R9A2	103P114O1	R-CHIP	RGC1/16SC223DTH	1/16W 223D 1005	N937L53411
R9A3	103P114O6	R-CHIP	RGC1/16SC563DTH	1/16W 563D 1005	N937L53411
R9A4	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9B0	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9B1	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9B2	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9B3	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9B4	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9B5	103P159O9	R-CHIP	RMC1/16SJPTH	1/16W 0 1005	N937L53411
R9E4	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R9E5	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R9E6	103P153O7	R-CHIP	RMC1/16S103JTH	1/16W 103J 1005	N937L53411
R9E7	103L299O9	R-CHIP	RMC1/16JTP	1/10W 0 1608	N937L53411
RA200	109P022O0	R-NETWORK-CHIP	RPB03T4121J	1/16W 121J 2010	N937L53411
RA201	109P022O0	R-NETWORK-CHIP	RPB03T4121J	1/16W 121J 2010	N937L53411

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

ELECTRICAL PARTS LIST

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.
RA202	109P022O0	R-NETWORK-CHIP	RPB03T4121J	1/16W 121J 2010	N937L53411
RA203	109P022O0	R-NETWORK-CHIP	RPB03T4121J	1/16W 121J 2010	N937L53411
RA204	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA205	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA206	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA207	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA208	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA213	109P01211	R-NETWORK-CHIP	RAC164D221JCTP	1/16W 221J 3216	N937L53610
RA239	109P020O3	R-NETWORK-CHIP	RAC104D104JCTH	1/16W 104J 2010	N937L53610
RA661	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA662	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA663	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA664	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA670	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA671	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA673	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA674	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA676	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA677	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA679	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA680	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA689	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA690	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA693	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA695	109P021O1	R-NETWORK-CHIP	RPB03T4680J	1/16W 680J 2010	N937L53411
RA6A0	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA6A1	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA6A2	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA6A3	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA6A5	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA6G7	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA701	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA702	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA703	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA704	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA705	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA706	109P020O9	R-NETWORK-CHIP	RPB03T4470J	1/16W 470J 2010	N937L53411
RA707	109P020O4	R-NETWORK-CHIP	RAC104D472JCTH	1/16W 472J 2010	N937L53411
RA708	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA709	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA710	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA711	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA712	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA713	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA714	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA715	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA716	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RA717	109P021O2	R-NETWORK-CHIP	RPB03T4101J	1/16W 101J 2010	N937L53411
RP700	265P12016	THERMISTOR	TH05-4B473FR	473F 4050K 1005	N937L53411
SW700	436P01513	SW-MICRO	SPVG110301		N937L53610
SW800	432L113O4	SW-PUSH-CHIP	JPM1040B0101	PUSH 1.0MM	N937L53610
SW801	432L113O4	SW-PUSH-CHIP	JPM1040B0101	PUSH 1.0MM	N937L53610
X6A1	285P13718	CRYSTAL-CHIP	NX3225GA 27.000MHZ	27MHZ 30PPM	N937L53411
X701	285P13729	CRYSTAL-CHIP	NX3225GA 10.000MHZ	10.000MHZ 20PPM	N937L53411
	937L53510	S5-PCB-MAIN			N947L89411
	937L53610	S6-PCB-MAIN			N937L53510
	937L53311	S5-PCB-MONI-R1			N967L18611
	937L53411	S6-PCB-MONI-R1			N937L53311

Ref. No.	Parts No.	Parts Name	Note	Spec.	Base Parts No.

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LAYOUT ON PRINTED CIRCUIT BOARD

MODEL : ED-330BE-R1,-WS (PARTS SIDE)

PCB-MAIN

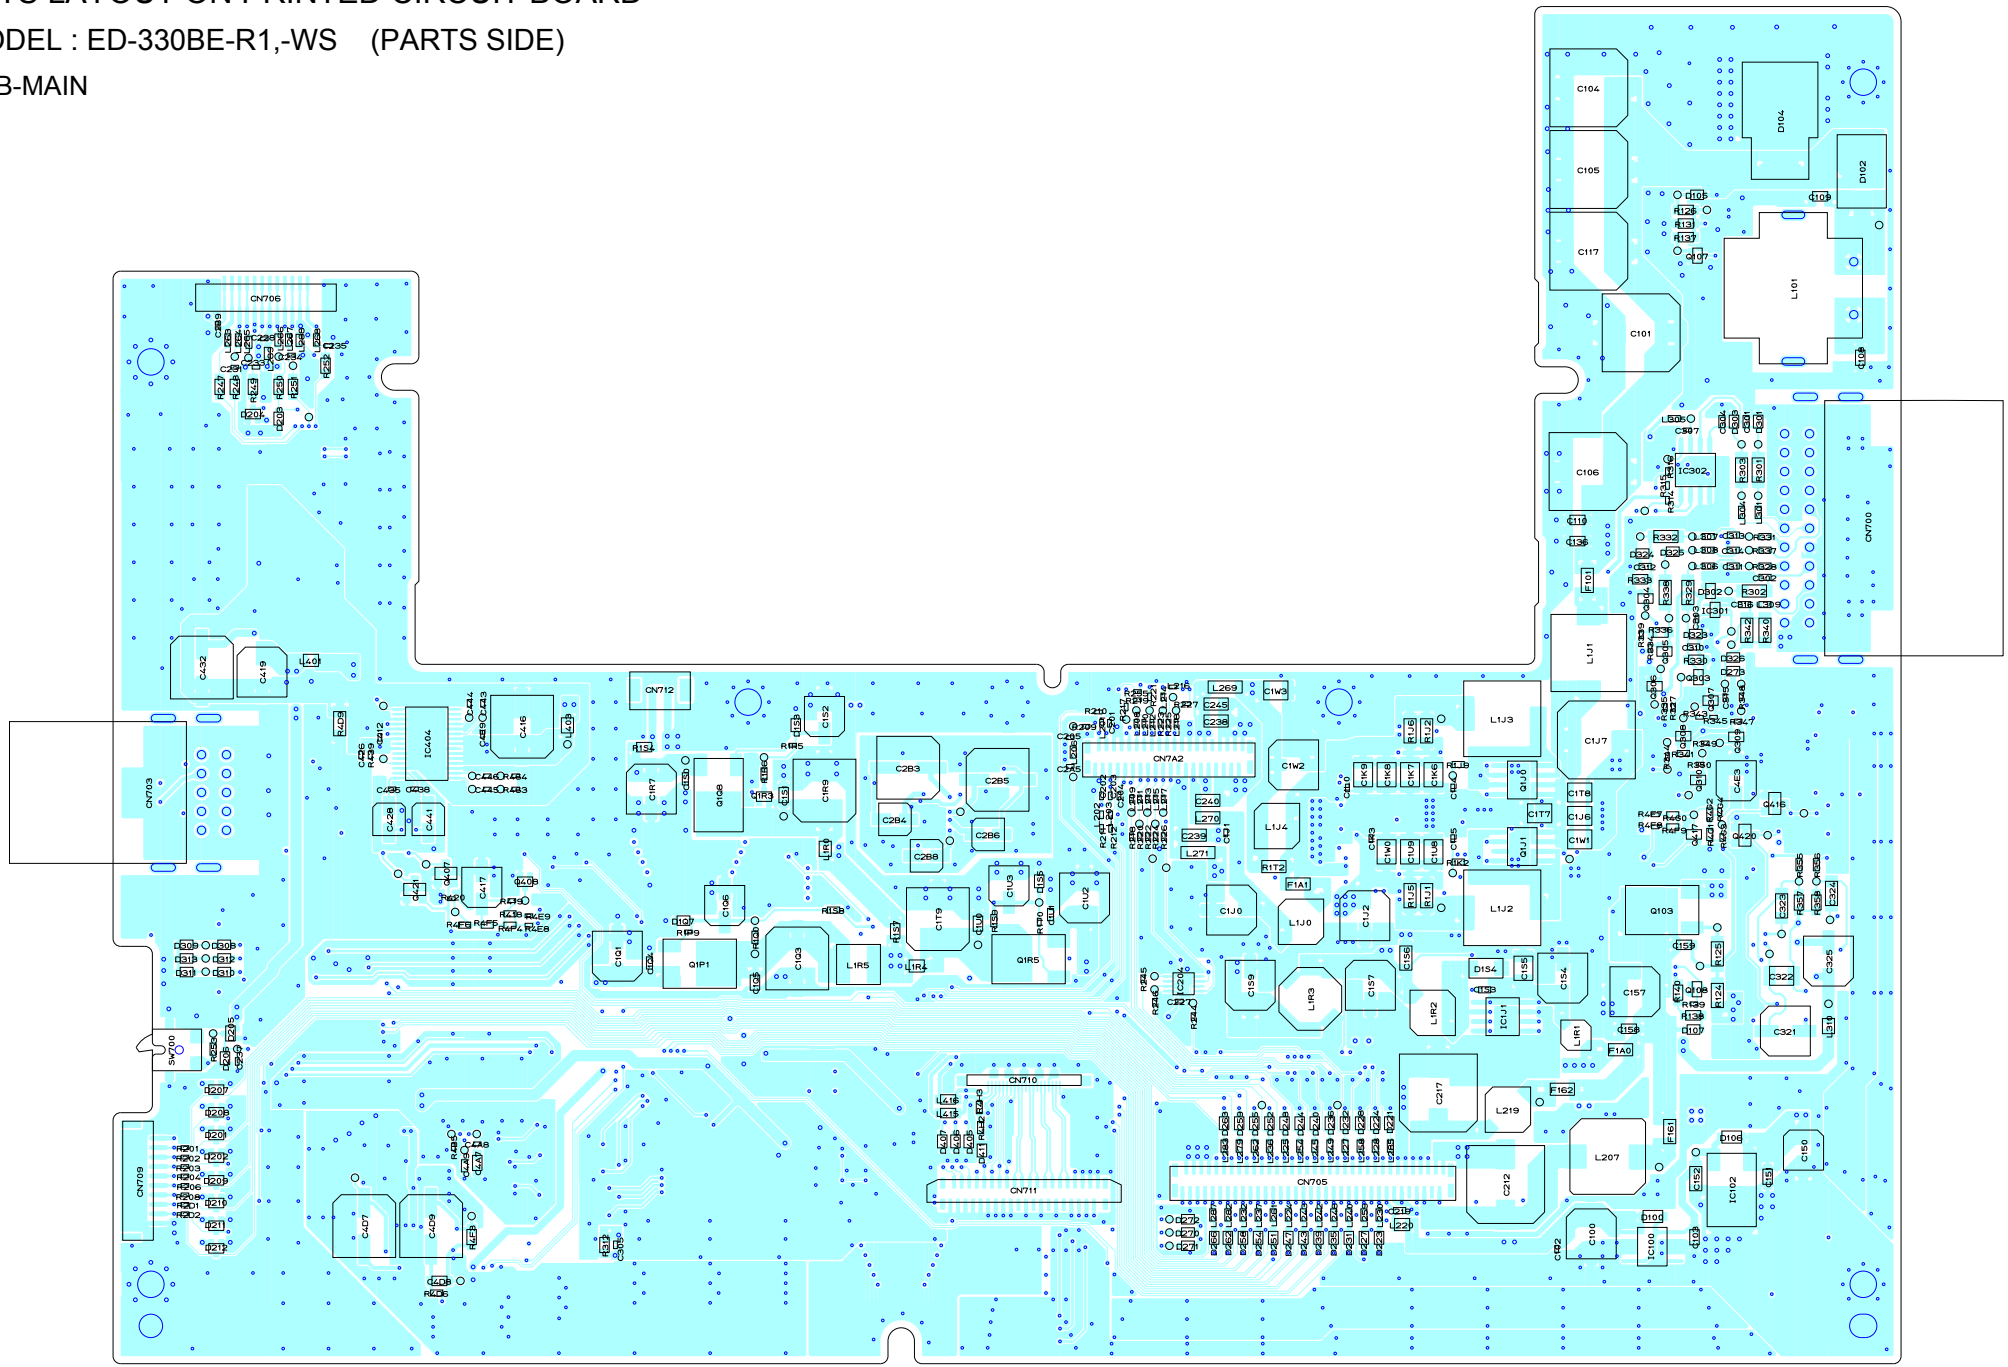
CN706
CN703
CN712
CN700
CN710
CN711
CN705
CN709
SW700
C104
C105
C117
C101
D104
D102
L101
C106
IC302
L1J1
L1J3
L1J2
L1J4
L1J0
C1J0
C1J2
C1J7
C1T7
C1T8
C1J6
C1W1
C1W2
C1W3
C1W0
C1K9
C1K8
C1K7
C1K6
C1K5
C1K4
C1K3
C1K2
C1K1
C1K0
C1J9
C1J8
C1J5
C1J4
C1J3
C1J2
C1J1
C1T2
C1R7
C1R5
C1R4
C1R3
C1R2
C1R1
C1S2
C1T9
C1U3
C1U2
C1U1
C1U0
C2B3
C2B4
C2B5
C2B6
C2B8
C1W9
C1W8
C1W7
C1W6
C1W5
C1W4
C1V9
C1V8
C1V7
C1V6
C1V5
C1V4
C1V3
C1V2
C1V1
C1V0
C1U9
C1U8
C1U7
C1U6
C1U5
C1U4
C1U1
C1T1
C1T0
C1S9
C1S8
C1S7
C1S6
C1S5
C1S4
C1S3
C1S1
C1S0
C1R9
C1R8
C1R6
C1R0
C1Q9
C1Q8
C1Q7
C1Q6
C1Q5
C1Q4
C1Q3
C1Q2
C1Q1
C1Q0
C1P9
C1P8
C1P7
C1P6
C1P5
C1P4
C1P3
C1P2
C1P1
C1P0
C1N9
C1N8
C1N7
C1N6
C1N5
C1N4
C1N3
C1N2
C1N1
C1N0
C1M9
C1M8
C1M7
C1M6
C1M5
C1M4
C1M3
C1M2
C1M1
C1M0
C1L9
C1L8
C1L7
C1L6
C1L5
C1L4
C1L3
C1L2
C1L1
C1L0
C1K9
C1K8
C1K7
C1K6
C1K5
C1K4
C1K3
C1K2
C1K1
C1K0
C1J9
C1J8
C1J7
C1J6
C1J5
C1J4
C1J3
C1J2
C1J1
C1J0
C1H9
C1H8
C1H7
C1H6
C1H5
C1H4
C1H3
C1H2
C1H1
C1H0
C1G9
C1G8
C1G7
C1G6
C1G5
C1G4
C1G3
C1G2
C1G1
C1G0
C1F9
C1F8
C1F7
C1F6
C1F5
C1F4
C1F3
C1F2
C1F1
C1F0
C1E9
C1E8
C1E7
C1E6
C1E5
C1E4
C1E3
C1E2
C1E1
C1E0
C1D9
C1D8
C1D7
C1D6
C1D5
C1D4
C1D3
C1D2
C1D1
C1D0
C1C9
C1C8
C1C7
C1C6
C1C5
C1C4
C1C3
C1C2
C1C1
C1C0
C1B9
C1B8
C1B7
C1B6
C1B5
C1B4
C1B3
C1B2
C1B1
C1B0
C1A9
C1A8
C1A7
C1A6
C1A5
C1A4
C1A3
C1A2
C1A1
C1A0
C432
C419
C416
C417
C441
C428
C438
C439
C435
C436
C437
C440
C442
C443
C444
C445
C446
C447
C448
C449
C450
C451
C452
C453
C454
C455
C456
C457
C458
C459
C460
C461
C462
C463
C464
C465
C466
C467
C468
C469
C470
C471
C472
C473
C474
C475
C476
C477
C478
C479
C480
C481

PARTS LAYOUT ON PRINTED CIRCUIT BOARD

MODEL : ED-330BE-R1,-WS (PATTERN SIDE)

PCB-MAIN

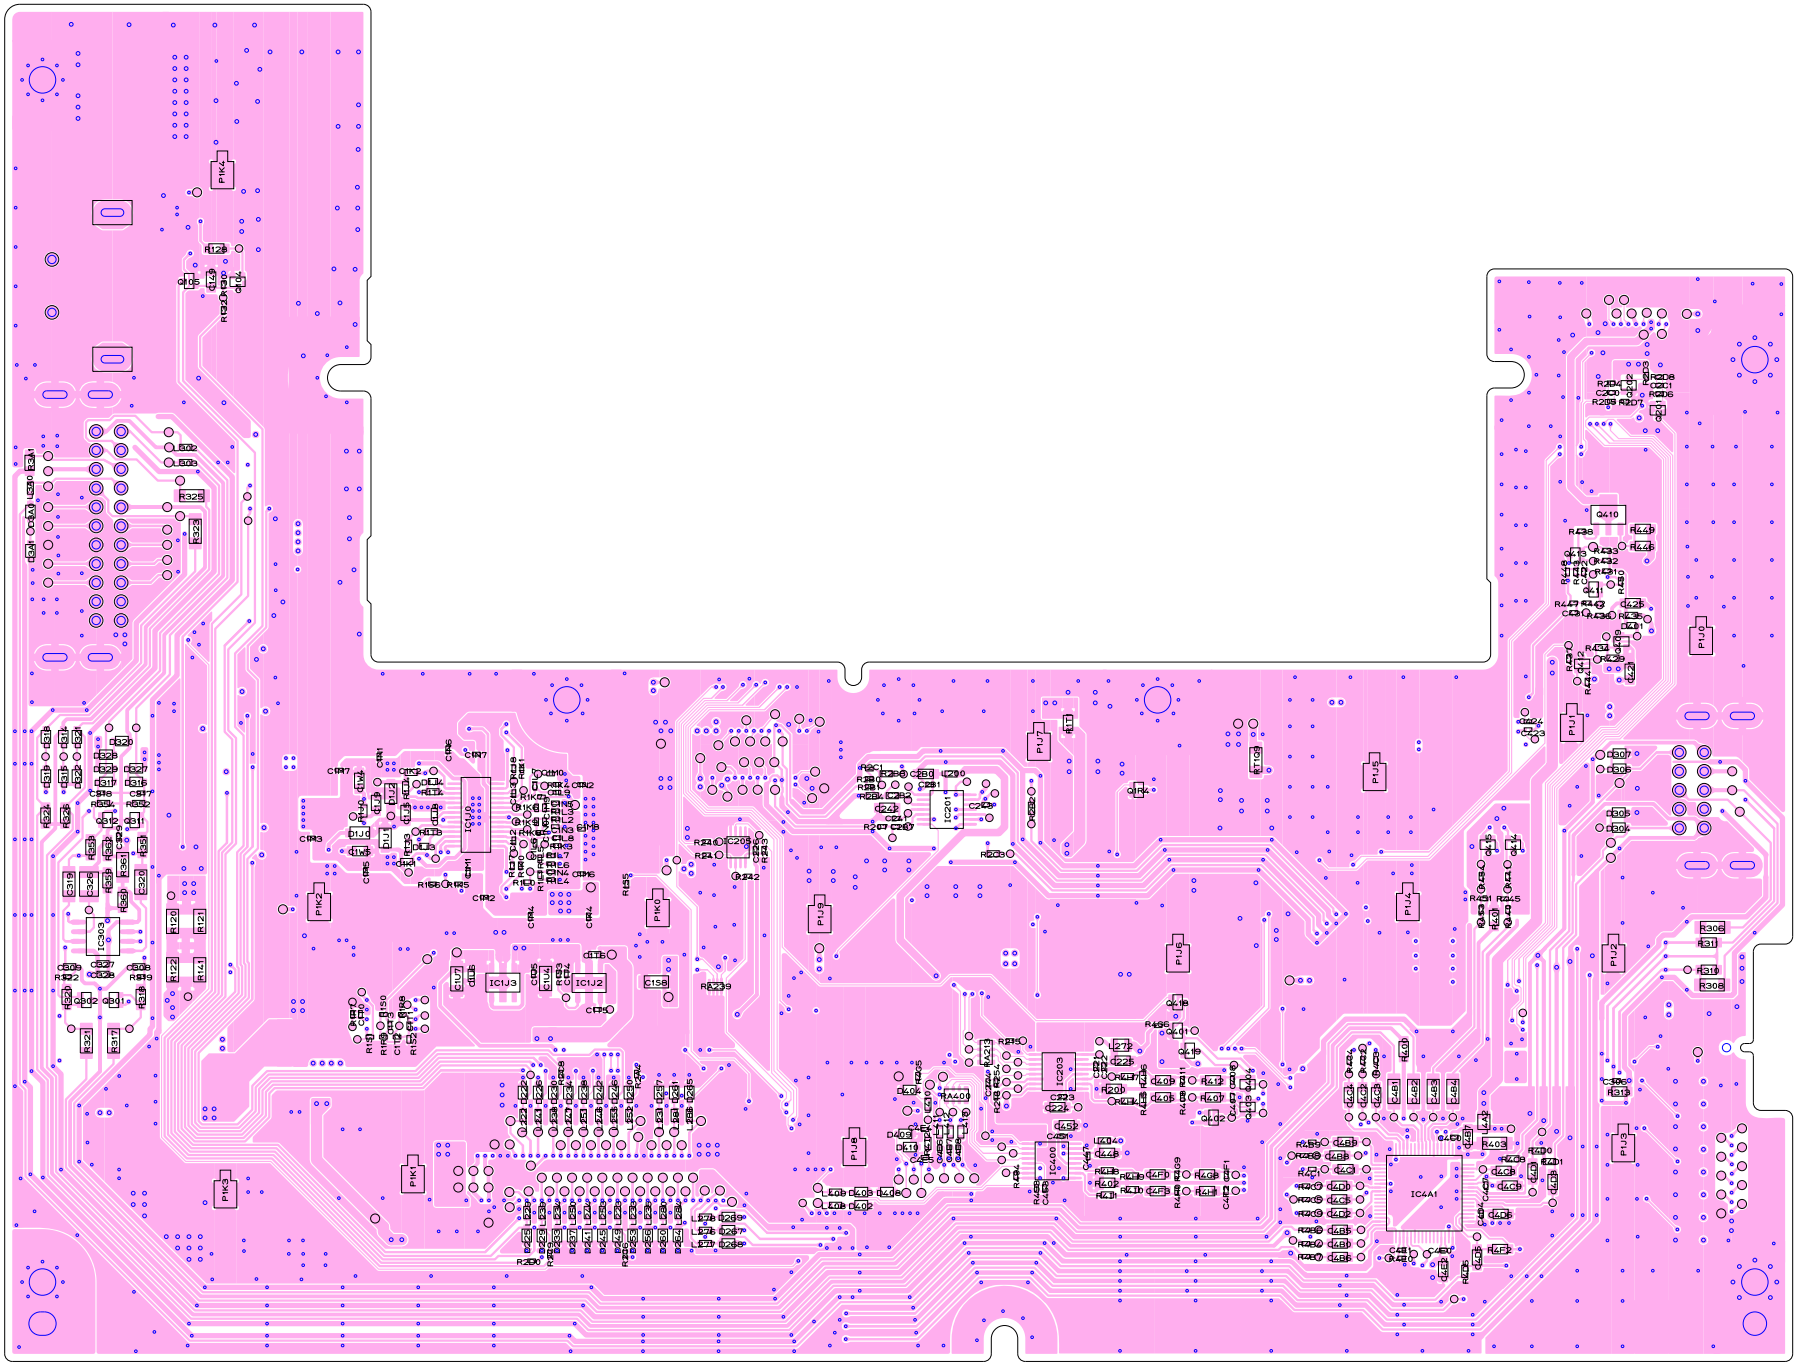

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LAYOUT ON PRINTED CIRCUIT BOARD

MODEL : ED-330BE-R1,-WS (PARTS SIDE)

PCB-PANEL

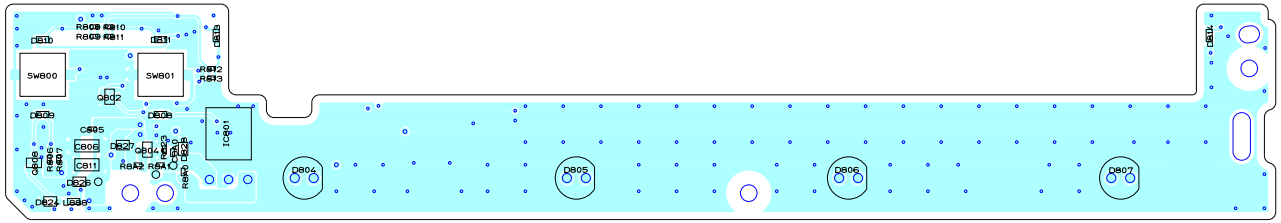

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LAYOUT ON PRINTED CIRCUIT BOARD

MODEL : ED-330BE-R1,-WS (PATTERN SIDE)

PCB-PANEL

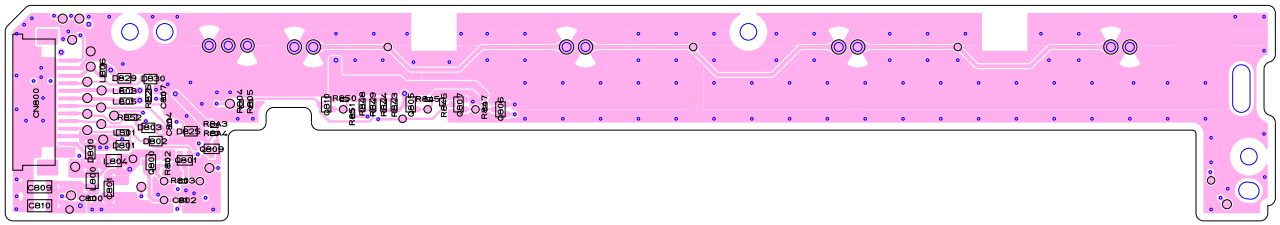

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LAYOUT ON PRINTED CIRCUIT BOARD

MODEL : ED-330BE-R1,-WS (PARTS SIDE)

PCB-MONI

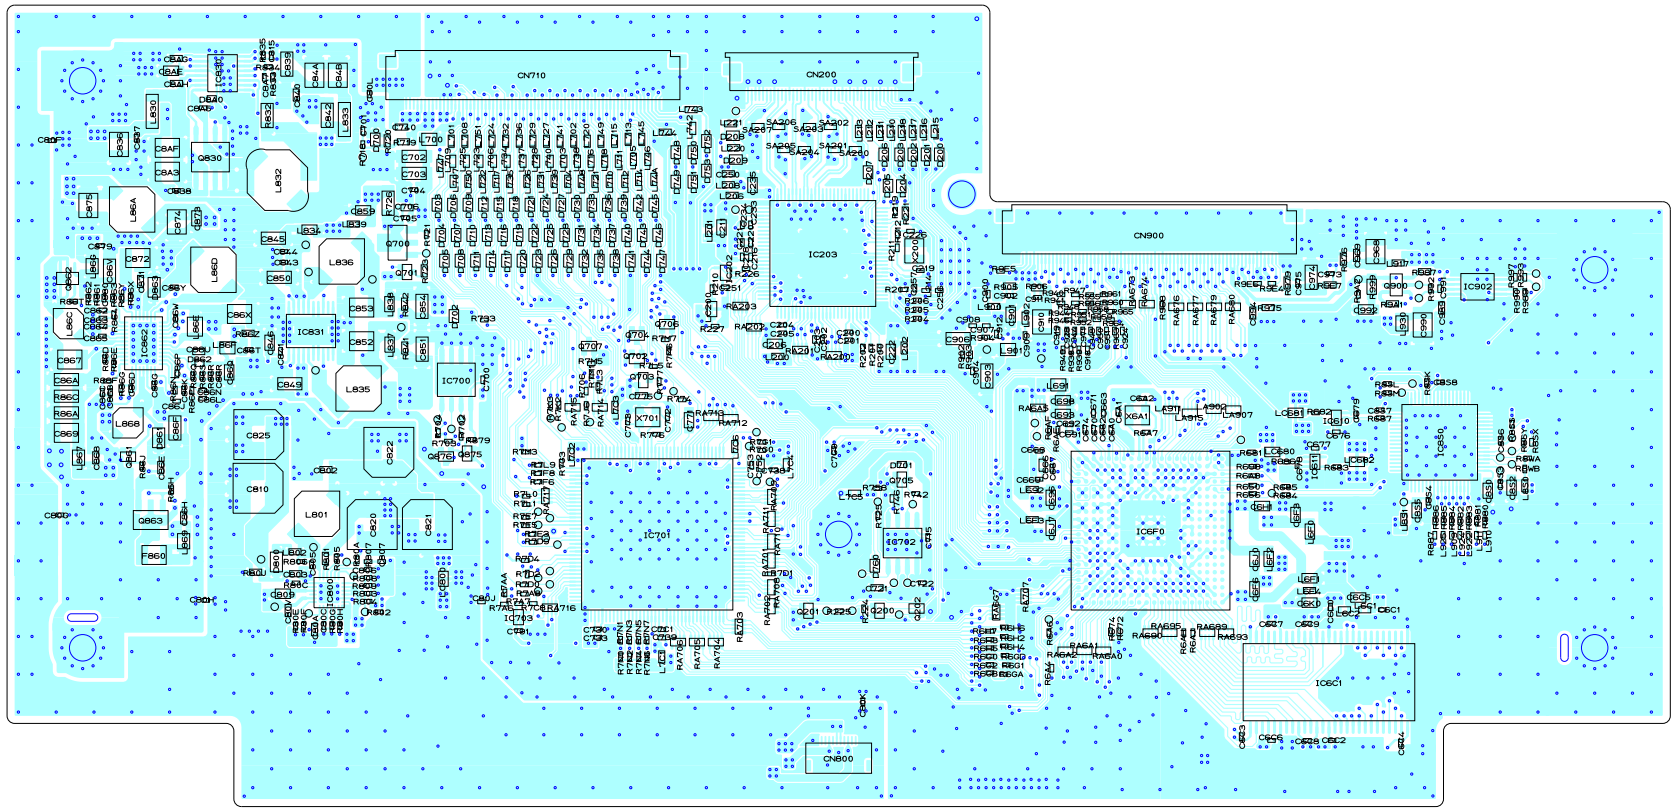

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PARTS LAYOUT ON PRINTED CIRCUIT BOARD

MODEL : ED-330BE-R1,-WS (PATTERN SIDE)

PCB-MONI

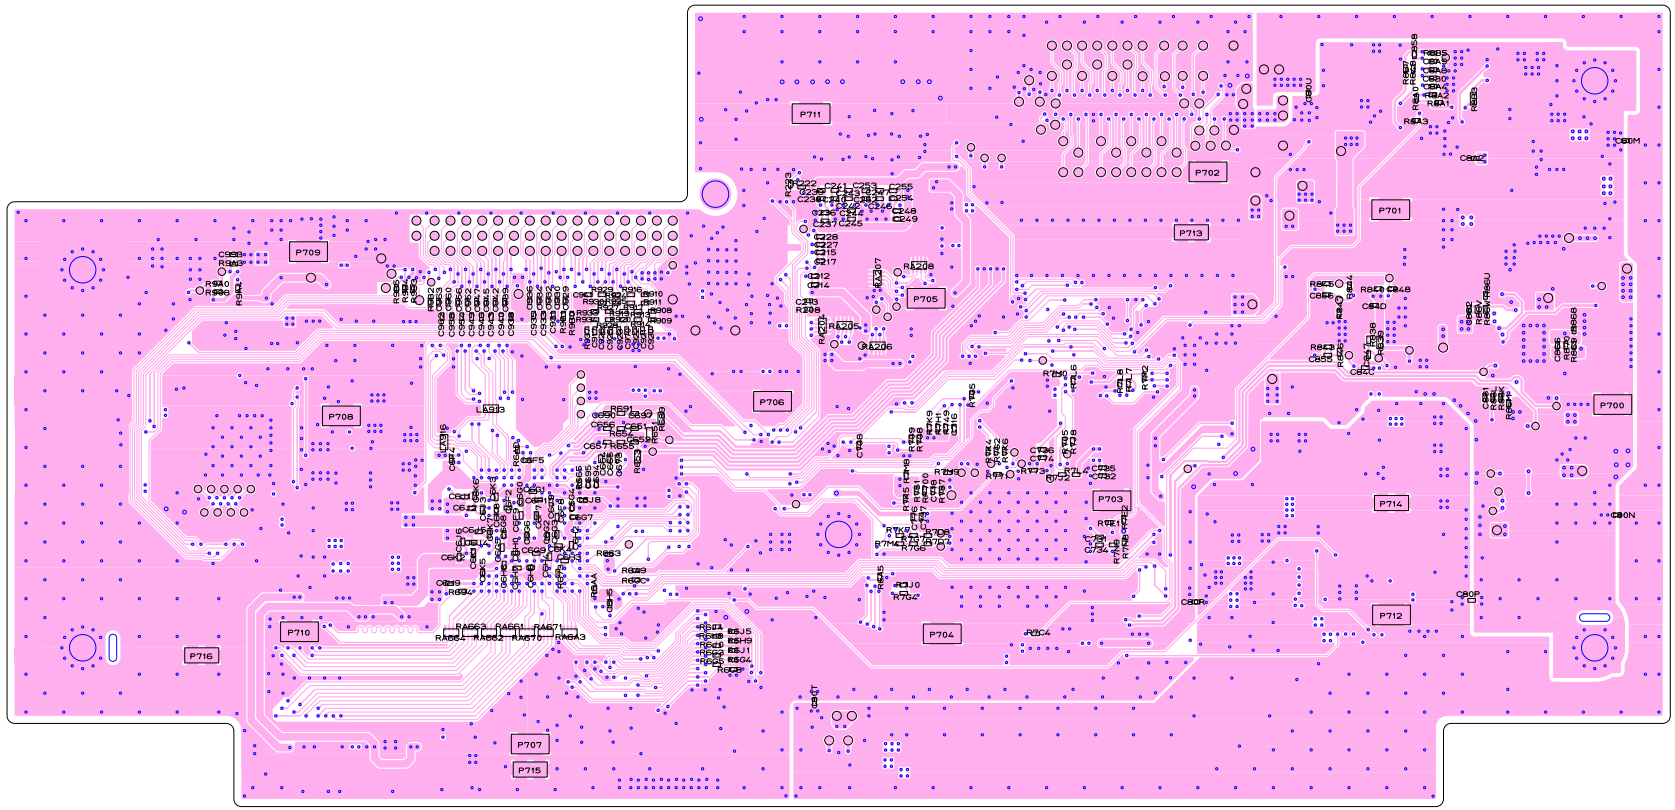

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

SCHEMATIC DIAGRAM PCB-MAIN VOL.1
MODEL : ED-330BE-R1,-WS

	OPEN	OPEN_0	OPEN_1	OPEN_H0	OPEN_H1
ED-330BE-R2	OPEN	OPEN	Mounting	OPEN	Mounting
ED-331BE	OPEN	Mounting	OPEN	OPEN	Mounting

OPEN :Reserve
OPEN_0 :OPEN[ED-330(with_mecha)]
OPEN_1 :OPEN[ED-331(without_mecha)]
OPEN_H0 :Mounting_at_the_time_of_use_HDMI.
OPEN_H1 :OPEN_at_the_time_of_use_HDMI.

*Refer to ED-330BE-R2 for this model.

Selector IC
IC4A1
AK4220VQ

IIC <2..0>

UNLESS_OTHERWISE		OPEN	Refer_to_the_table.
CAPACITOR	±.5(V)		
RESISTOR	± 5%),1/16W		

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

SCHEMATIC DIAGRAM PCB-MAIN VOL.2 MODEL : ED-330BE-R1,-WS

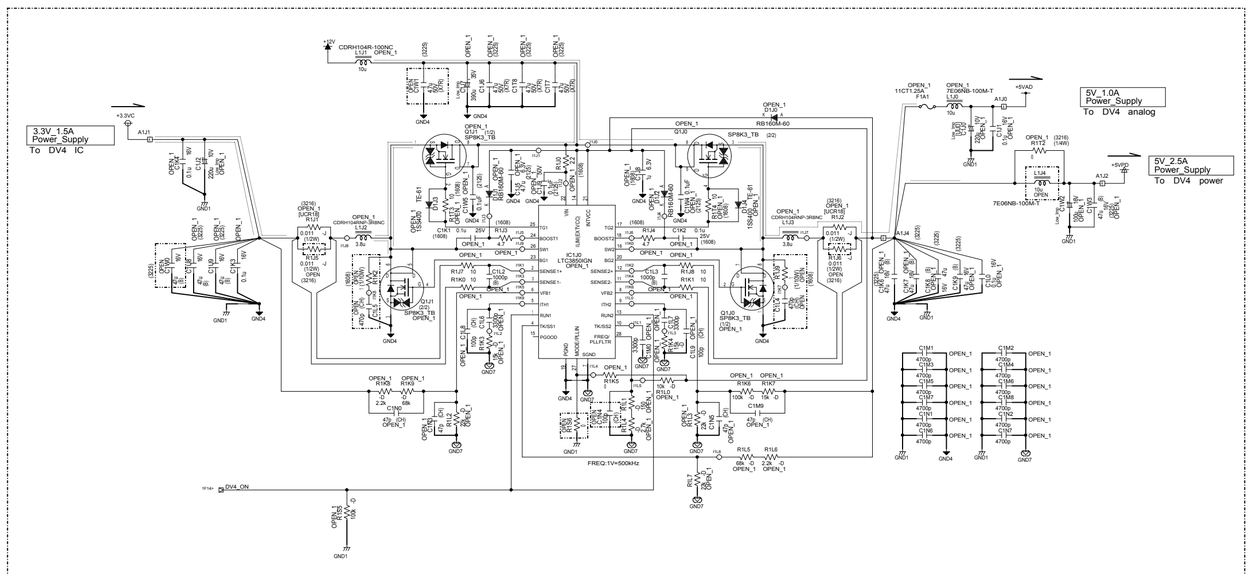

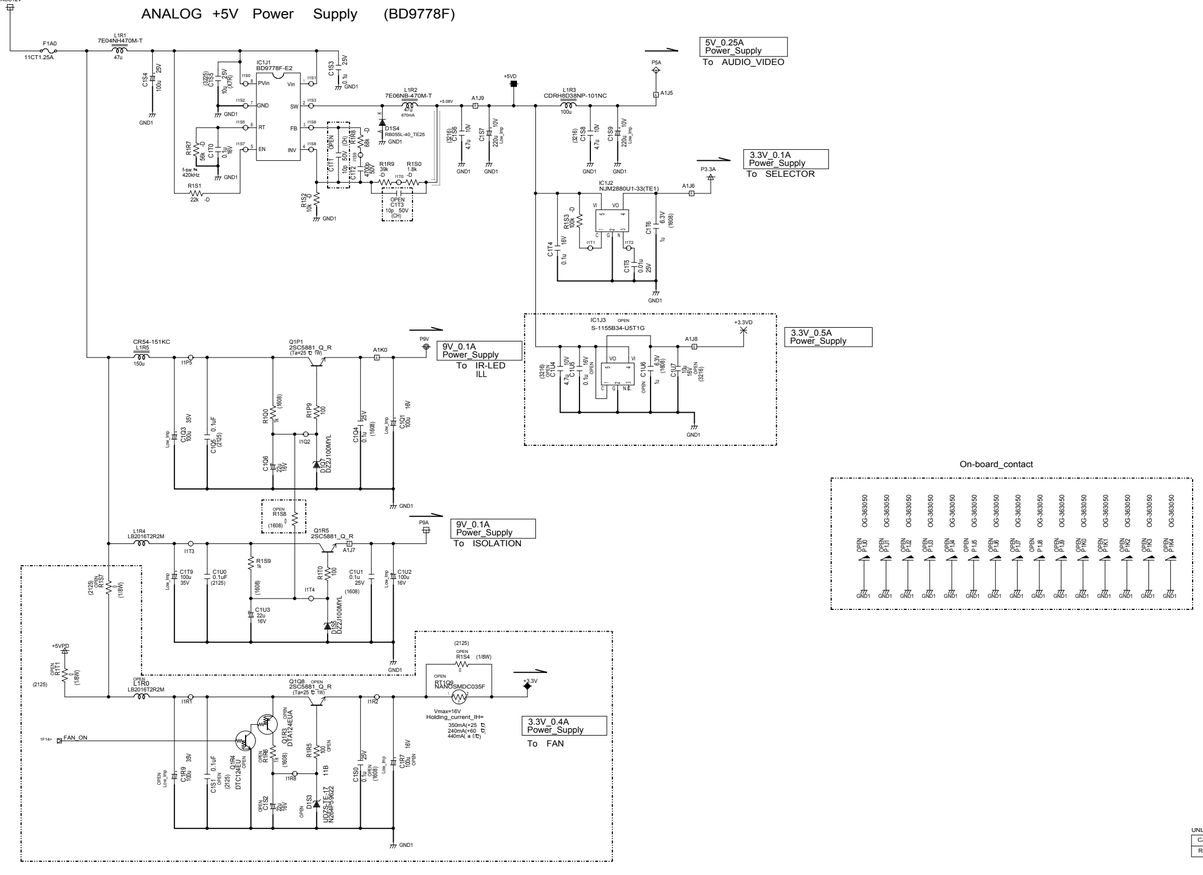

*Refer to ED-330BE-R2 for this model.

	OPEN	OPEN_0	OPEN_1	OPEN_H0	OPEN_H1
ED-330BE-R2	OPEN	OPEN	Mounting	OPEN	Mounting
ED-331BE	OPEN	Mounting	OPEN	OPEN	Mounting

OPEN :Reserve
OPEN_0 :OPEN[ED-330(with_mecha)]
OPEN_1 :OPEN[ED-331(without_mecha)]
OPEN_H0 :Mounting_at_the_time_of_use_HDMI.
OPEN_H1 :OPEN_at_the_time_of_use_HDMI.



Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

SCHEMATIC DIAGRAM PCB-PANEL MODEL : ED-330BE-R1,-WS

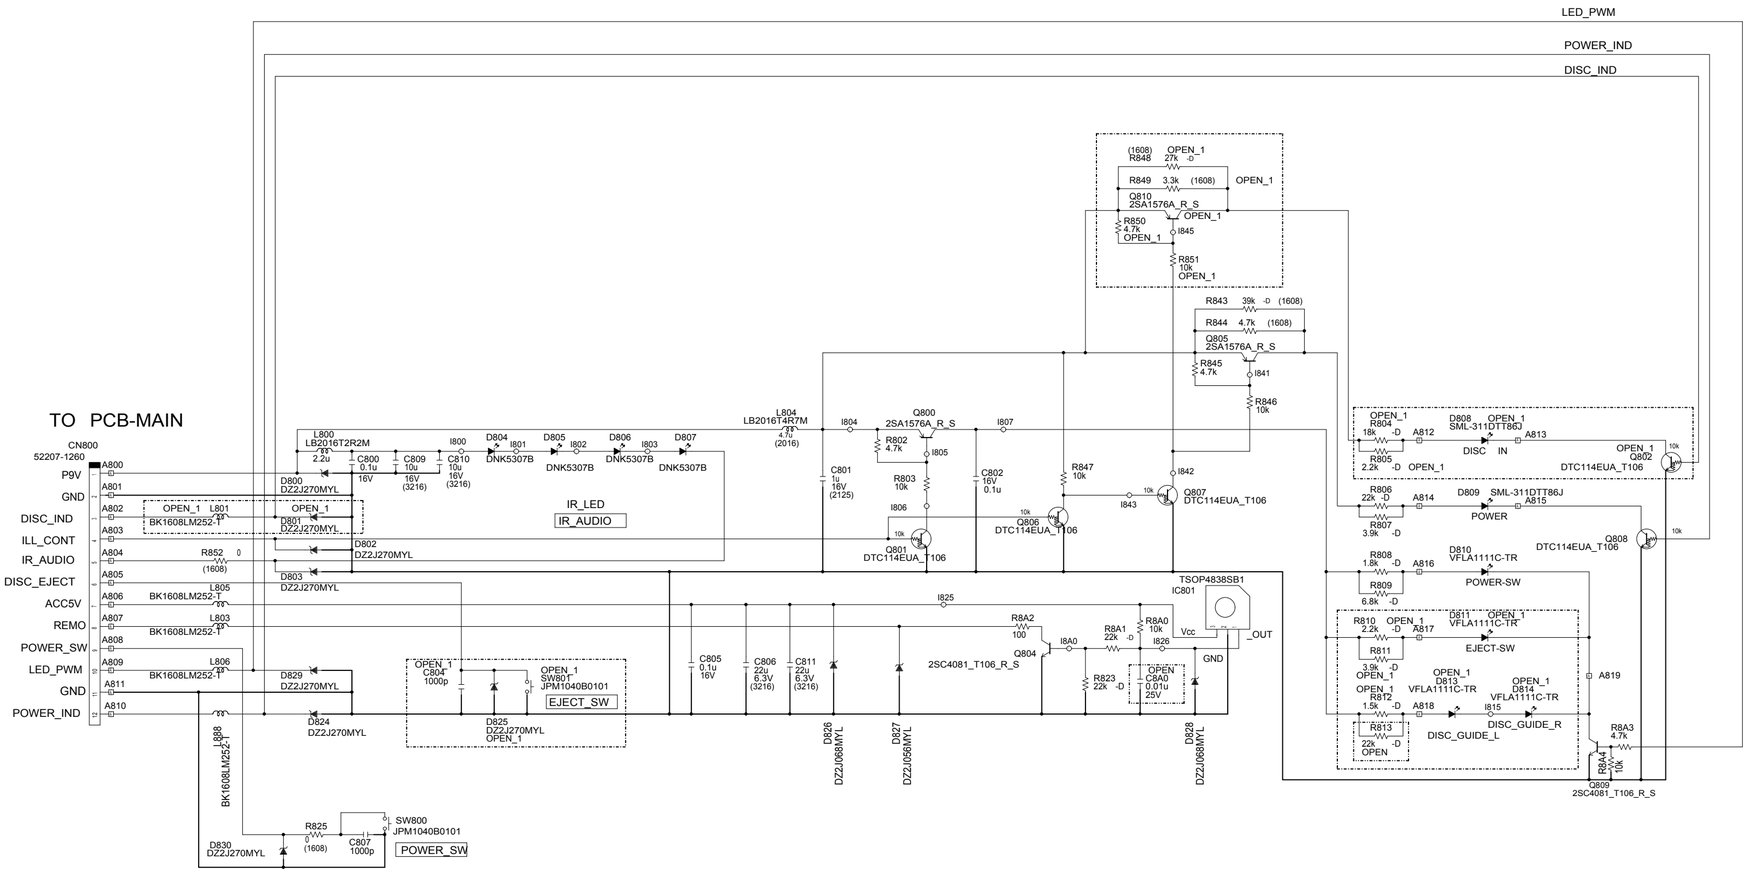

*Refer to ED-330BE-R2 for this model.

	OPEN	OPEN_0	OPEN_1	OPEN_H0	OPEN_H1
ED-330BE-R2	OPEN	OPEN	Mounting	OPEN	Mounting
ED-331BE	OPEN	Mounting	OPEN	OPEN	Mounting

OPEN :Reserve
OPEN_0 :OPEN[ED-330(with_mecha)]
OPEN_1 :OPEN[ED-331(without_mecha)]
OPEN_H0 :Mounting_at_the_time_of_use_HDMI.
OPEN_H1 :OPEN_at_the_time_of_use_HDMI.



UNLESS_OTHERWISE	
CAPACITOR	B.50V
RESISTOR	∠ ±5%),1/16W

OPEN Refer_to_the_table.

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

SCHEMATIC DIAGRAM PCB-MONI VOL.1
MODEL : ED-330BE-R1,-WS

	OPEN	OPEN_0	OPEN_1	OPEN_H0	OPEN_H1
ED-330BE-R2	OPEN	OPEN	Mounting	OPEN	Mounting
ED-331BE	OPEN	Mounting	OPEN	OPEN	Mounting

*Refer to ED-330BE-R2 for this model.

OPEN :Reserve
OPEN_0 :OPEN[ED-330(with_mecha)]
OPEN_1 :OPEN[ED-331(without_mecha)]
OPEN_H0 :Mounting_at_the_time_of_use_HDMI.
OPEN_H1 :OPEN_at_the_time_of_use_HDMI.



LCD_B/L_Power_Supply_Circuit

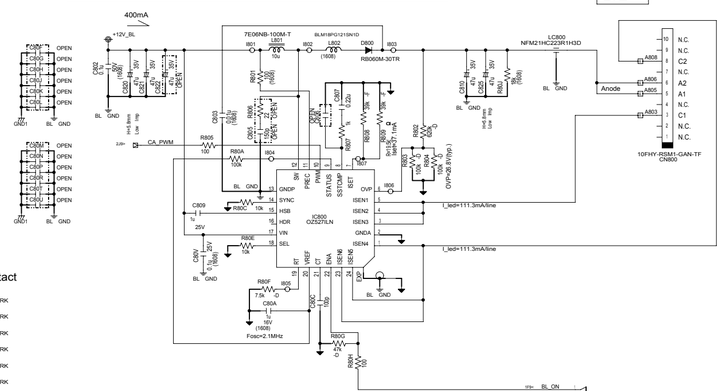

B/L

On-board_Contact



On-board_Plate
(2mmx4.5mm)

CAMMUE(2/3)

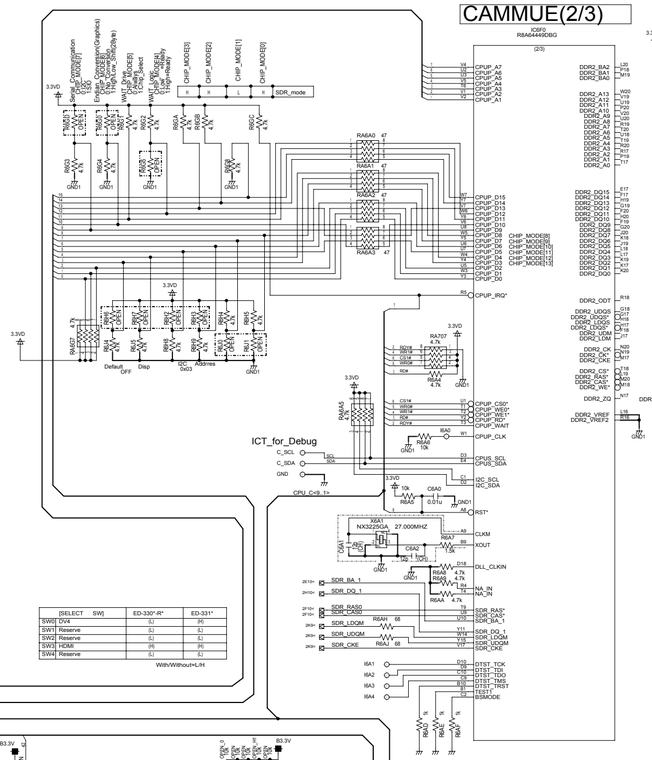

CAMMUE(1/3)

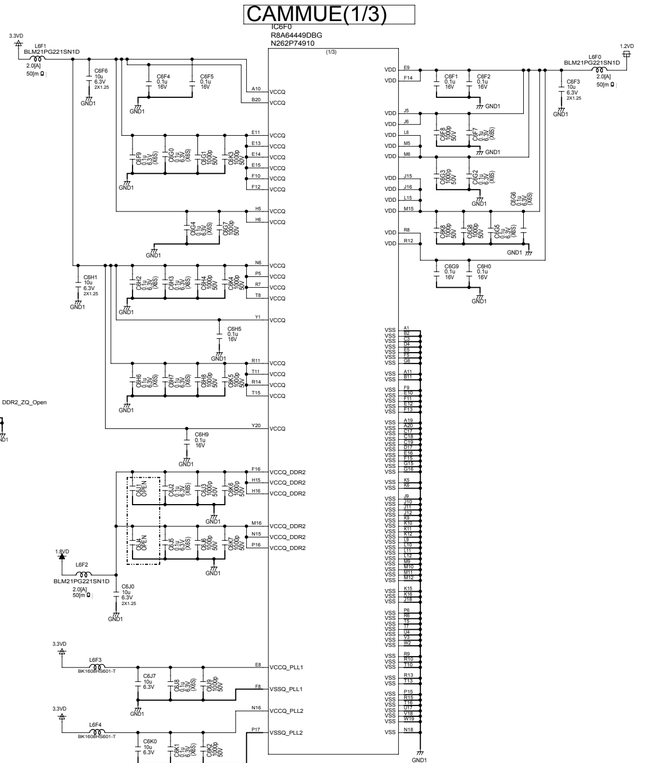

CAMMUE(3/3)

[SELECT SW]	ED-330*-R*	ED-331*
SW0	DV4	[R]
SW1	Reserve	[L]
SW2	Reserve	[L]
SW3	HDMI	[R]
SW4	Reserve	[L]

WithWithout+L/H

LCD_B/L_Power_Supply_Circuit
LCD_Power_Supply_Circuit
IC_Power_Supply_Circuit
(3.3VD,1.8VD,1.2VD)
+B_Voltage_Detection

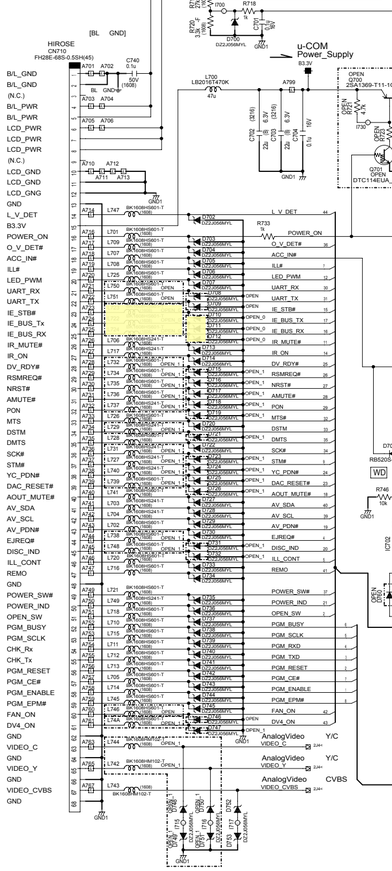

IC701
R5F64168PFD
u-COM
R32C/116 Group

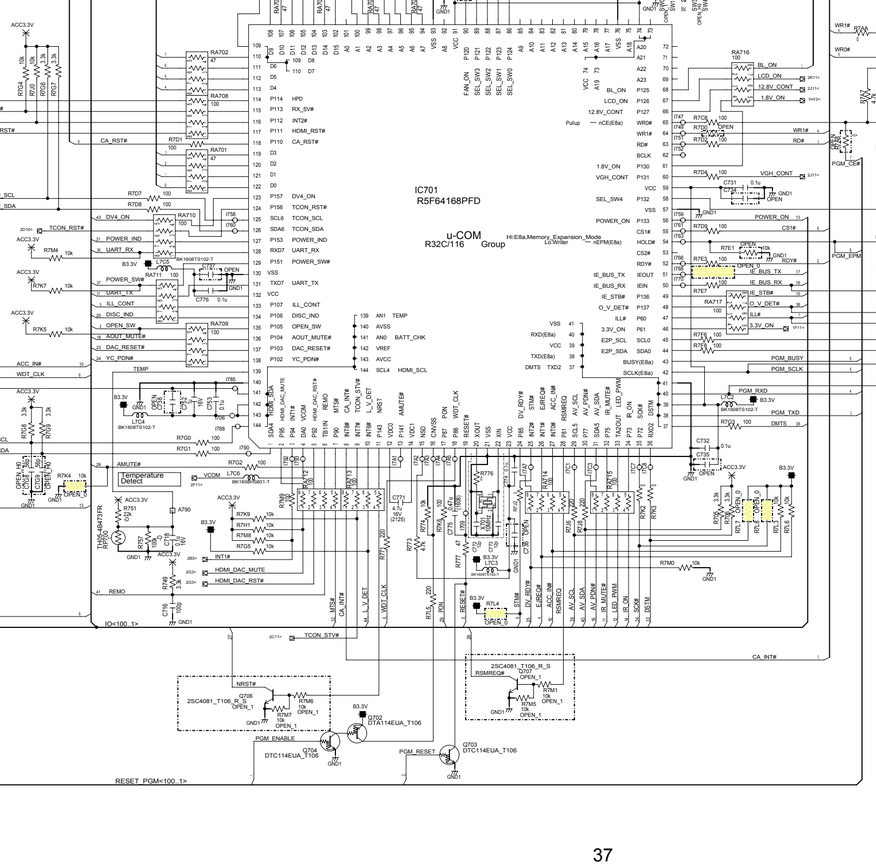

3.3V_Power_Supply

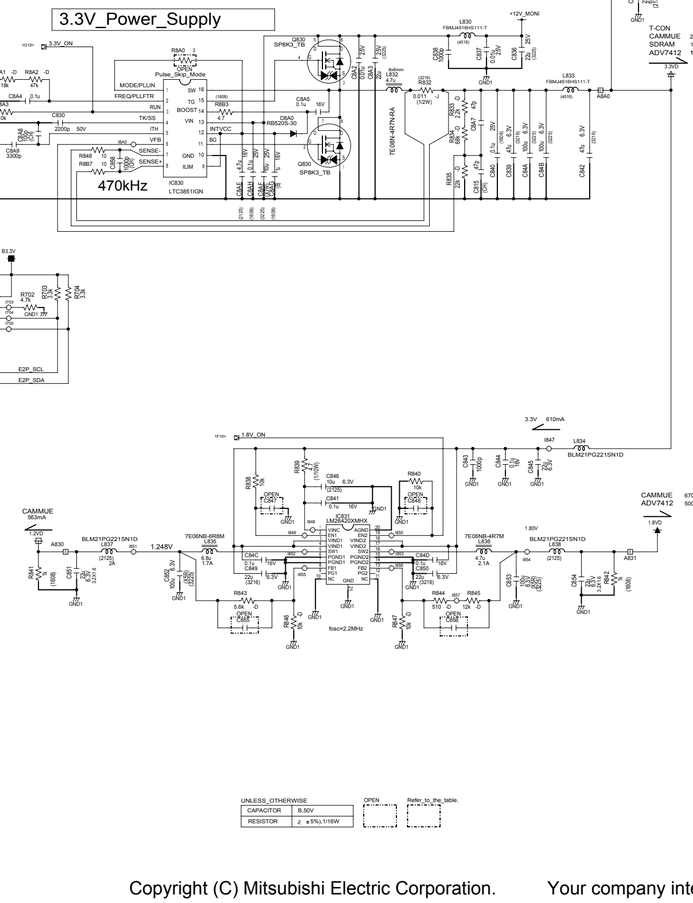

UNLESS_OTHERWISE		OPEN	Refer_to_the_table.
CAPACITOR	B.50V		
RESISTOR	J: ±5%,1/16W		

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

SCHEMATIC DIAGRAM PCB-MONI VOL.2 MODEL : ED-330BE-R1,-WS

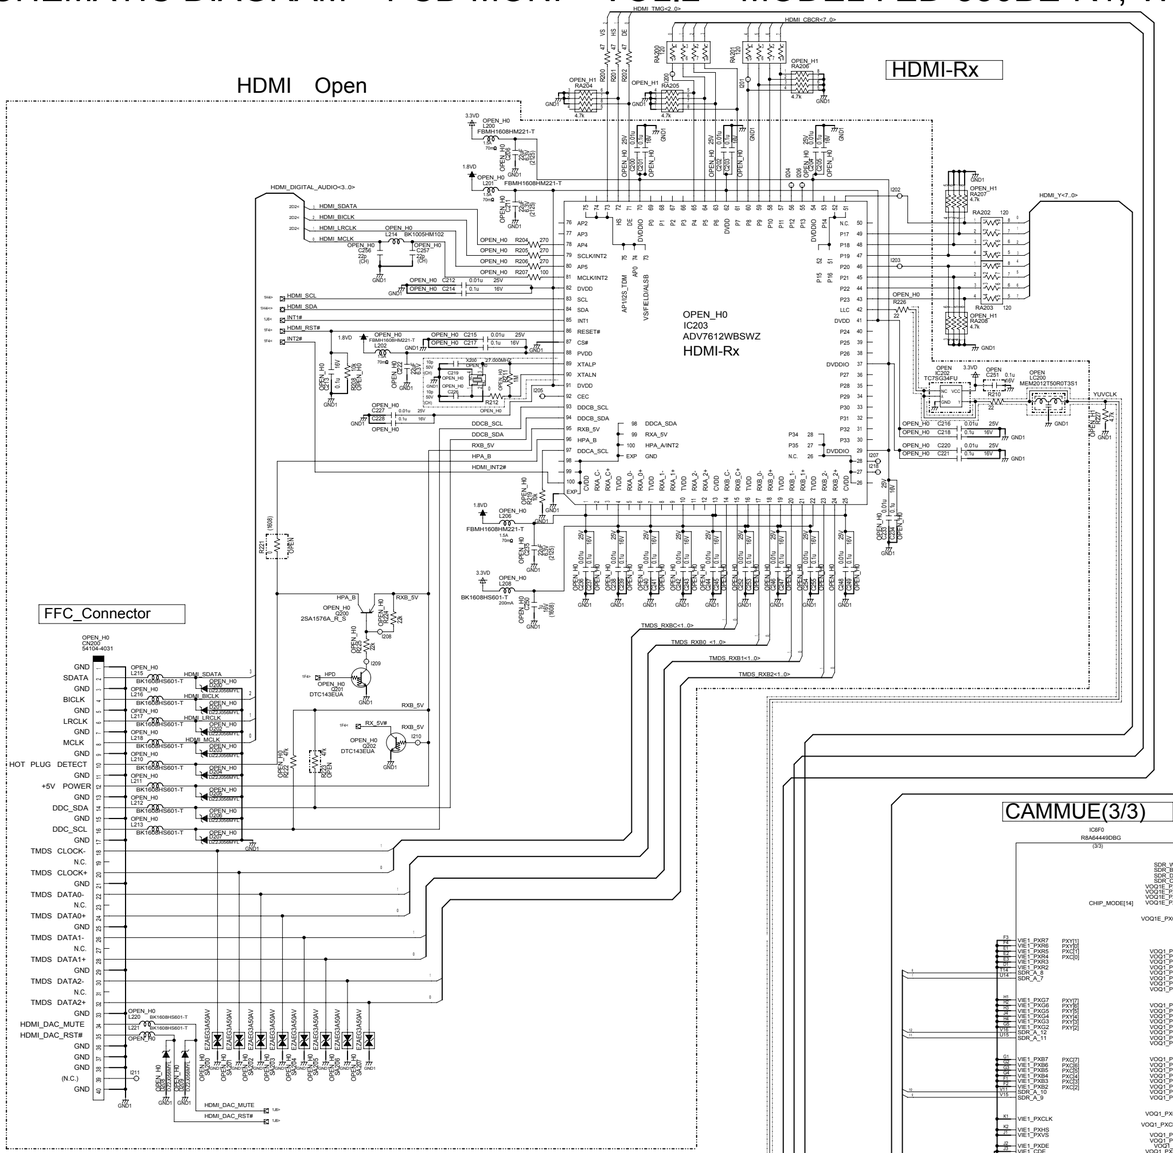

*Refer to ED-330BE-R2 for this model.

	OPEN	OPEN_0	OPEN_1	OPEN_H0	OPEN_H1
ED-330BE-R2	OPEN	OPEN	Mounting	OPEN	Mounting
~~ED-331BE~~	~~OPEN~~	~~Mounting~~	~~OPEN~~	~~OPEN~~	~~Mounting~~

OPEN :Reserve
OPEN_0 :OPEN[ED-330(with_mecha)]
OPEN_1 :OPEN[ED-331(without_mecha)]
OPEN_H0 :Mounting_at_the_time_of_use_HDMI.
OPEN_H1 :OPEN_at_the_time_of_use_HDMI.

1	+12V_BL	B/L 400mA	7	+5V LCD DC/DC	
2	+12V_MONI	LCD DC/DC	8	B3.3V R32C116 EEPROM WD-IC	
3	+3.3V	LCD 15mA	9	3.3VD T-CON 50mA CAMMUE 272mA SDRAM 272mA ADV7412 272mA	
4	-6V	LCD 20mA	10	1.8VD CAMMUE 870mA ADV7412 500mA	GND1
5	+24V	LCD 10mA	11	1.2VD CAMMUE 563mA	2 BL GND BackLight
6	+12.8V	LCD 54mA	12	ACC3.3V uCOM I/O	3 BackLight

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

PCB-MAIN

Item	Measurement point	Voltage [V]	Remarks
+B power supply	B3.3VA (A100)	3.4±0.2V	Power of circuit for writing software
	+5VAD (A1J0)	5.0±0.2V	DV4 mecha 5V analog power supply
	+5VPD (A1J2)	5.0±0.2V	DV4 mecha 5V power supply
	+3.3VC (A1J1)	3.3±0.2V	DV4 mecha 3.3V power supply
ACC power supply	ACC12V (A105)	12.2±0.5V	ACC 12V power supply
	P5VD (A1J9)	5.0±0.2V	Original power of P3.3A and P5A
	P5A (A1J5)	5.0±0.2V	Power supply for AUDIO/VIDEO
	P3.3A (A1J6)	3.3±0.2V	Power supply for SELECTOR IC
	P9V (A1K0)	9.4±0.5V	LED power supply for IR transmission
	P9A (A1J7)	9.4±0.5V	Power supply for ISOLATION IC

PCB-MONI

Item	Measurement point	Voltage [V]	Remarks
+B power supply	+B3.3V (A799)	3.4±0.2V	Microcomputer backup
ACC power supply	+24.0V (A86B)	24.0±1.0V	LCD power supply
	+12.8V (A86A)	12.8±0.5V	
	+3.3V (A863)	3.3±0.2V	
	+5V (A8F2)	5.0±0.5V	
	-6V (A862)	-6.0±0.2V	
	ACC3.3V (A8A1)	3.3±0.2V	ACC 3.3V power supply
	3.3VD (A8A0)	3.3±0.2V	Power supply for T-CON and regulator IC
	1.8VD (A831)	1.8±0.2V	Power supply for CAMMUE IC
	1.2VD (A830)	1.2±0.2V	Power supply for CAMMUE IC
	Vcom (A949)	5.8±0.2V	Power supply for VCOM
	Vref1 (A903)	12.3±0.3V	LCD gradation voltage
	Vref9 (A911)	7.3±0.2V	
	Vref10 (A912)	5.8±0.2V	
	Vref18 (A920)	0.6±0.1V	
	BL-POW (A806)	19.5±1.0V	Backlight side power supply
	Trmst (A790)	1.27V ~ 2.26V	Thermistor voltage (10℃~50℃)

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.

< Image waveform >

DV4 Image waveform (Color Bar)

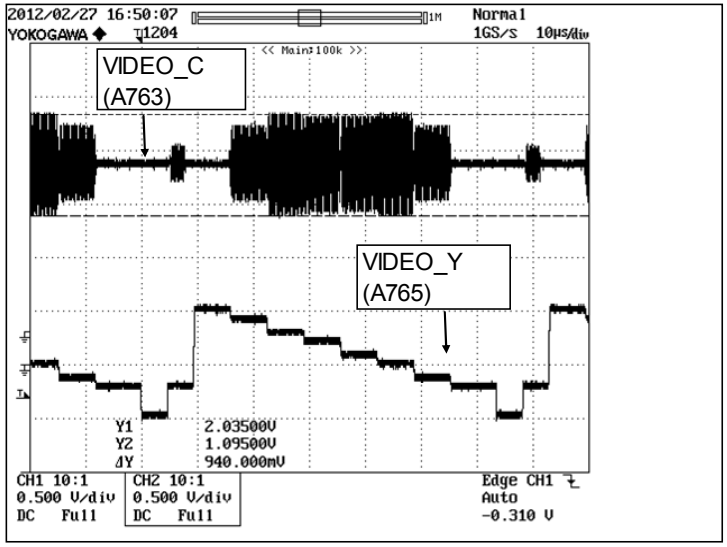

Composite Image waveform (Color Bar)

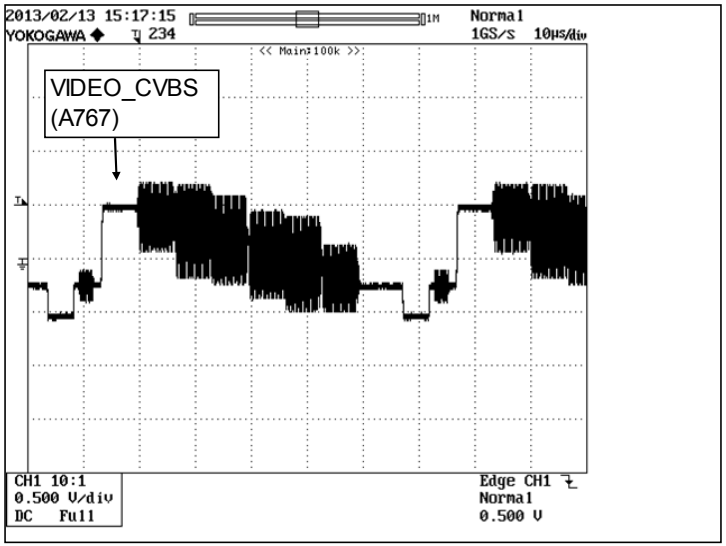

Copyright (C) Mitsubishi Electric Corporation. Your company internal use only.