



# OUTLANDER / LANCER CIGARETTE LIGHTER KIT MZ360133EX INSTALLATION AND HANDLING INSTRUCTIONS

Applicable Models;  
OUTLANDER

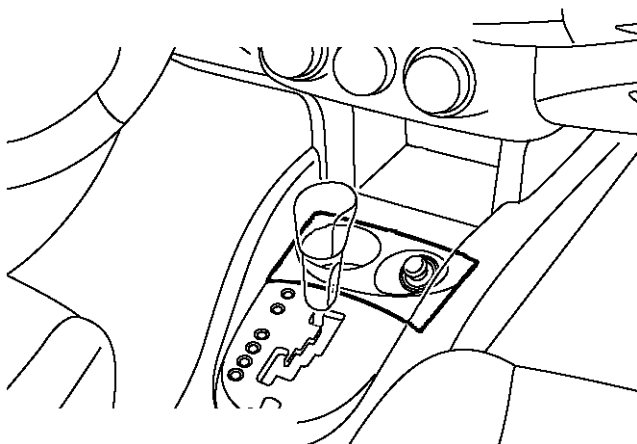

LANCER  
LANCER EVOLUTION (2008–)  
LANCER SPORTBACK

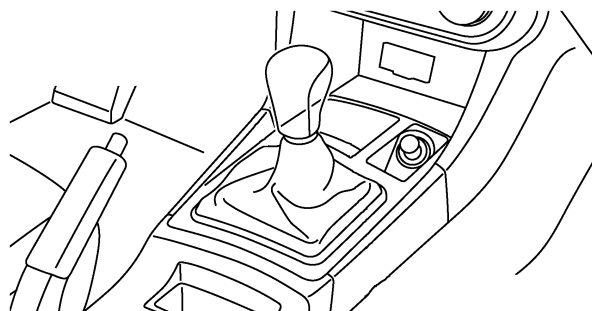

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:

Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)


Phillips screwdriver



Trim remover




Multimeter



## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)

- ① Cigarette lighter: 1
- ② Cigarette lighter case: 1
- ③ Cigarette lighter nut: 1




## ■ PRECAUTIONS

- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- Disconnecting the (–) cable from the battery causes the radio and audio presets, the clock, etc. to lose their memory. Record the contents of the memory before disconnecting the battery negative cable so that you can reprogram the radio presets after completing the installation.
- Be careful not to damage the vehicle during installation.
- Connect wiring harnesses securely.
- To prevent damage to harnesses, be sure to fasten them all with vinyl tape or tie wraps where they may otherwise dangle and touch vehicle parts.
- The Installation Procedures describes the installation on the manual transmission model. For the automatic transmission model, the shape of the front floor console panel is different and the shift knob does not need to be removed, but the installation procedure is the same. (LANCER Series only)
- Be sure to replace the accessory socket with the cigarette lighter socket to use the cigarette lighter. If the cigarette lighter plug is pushed into the accessory socket, it will not return to its original position, so it will heat up and may catch fire, which is extremely dangerous.


### Before installation

- Be sure to disconnect the negative terminal cable from the battery.



### When installing or removing parts


- Loosen or tighten bolts and nuts using tools that match their sizes.



- Use a Phillips screwdriver that fits the recess in the head of the screw being loosened or tightened.




- To remove plastic parts, use a trim remover.




### Wiring


- When disconnecting connectors, first unlock them, then separate the connectors by pulling on themselves, not on cables.

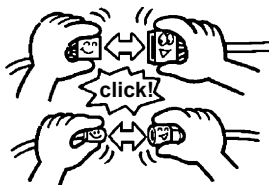

- When connecting connectors, push them against each other until the lock clicks.

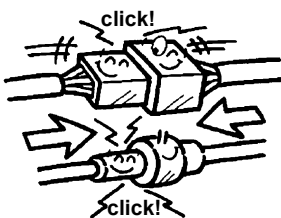


- Do not pull on wiring harnesses strongly.

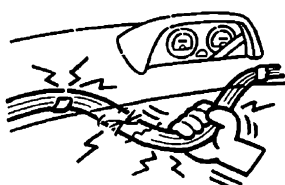


- Do not let harnesses be pinched between parts.




- Route the harness away from hot components such as the engine and radiator.




- Protect the harness from sharp edges by covering the edges with tape or other suitable materials.

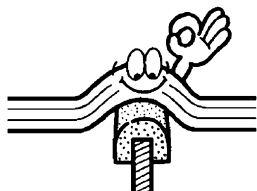

- Apply sealant to grommets at portions where the harness run through.

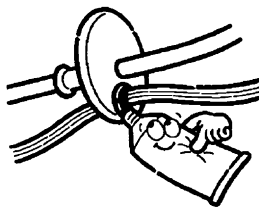


- Do not fasten the harness to brake pipes or high pressure air conditioner pipes.



### Clamping harness

- Fasten the additional harness to an existing vehicle harness using tape or tie wraps.



- Bind up extra length of the harness using a tie wrap.




- If one tie wrap is too short, use two connected together.




### After installation


- Check the product and wiring for installed condition before connecting the cable to the battery.

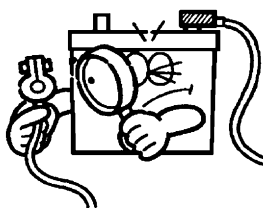

- Check the installed product for function. Also check lamps, horn, wipers, etc. for proper operation.

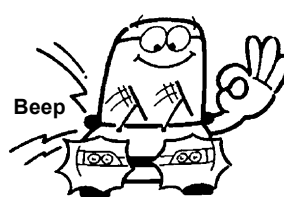


# INSTALLATION PROCEDURES for OUTLANDER

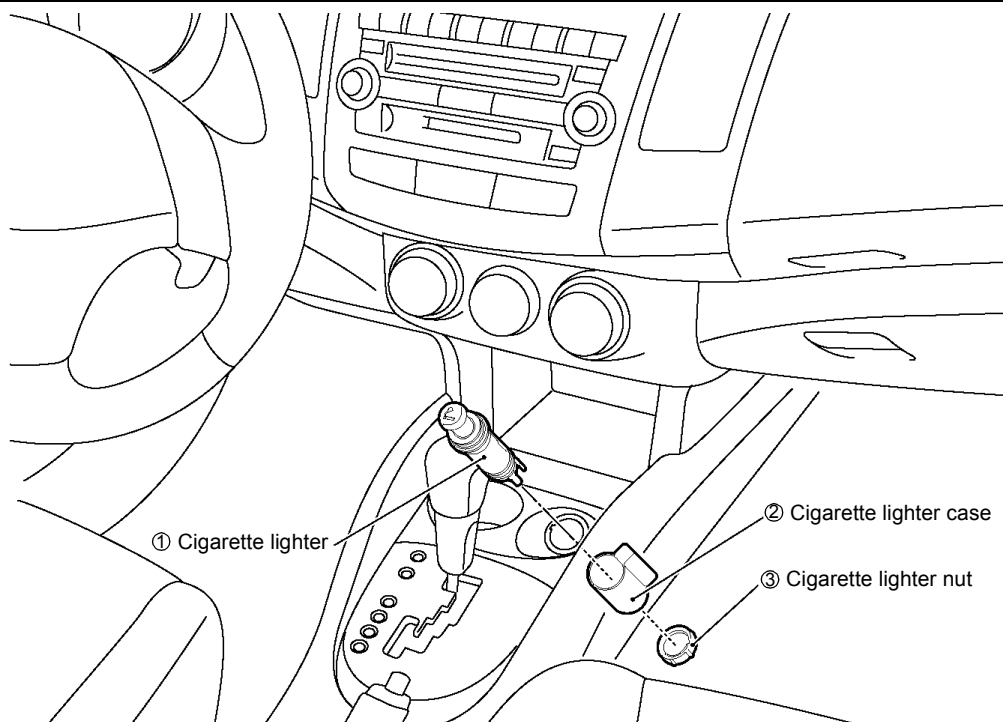

DKAK002F

## A. REMOVING THE CENTER CONSOLE UPPER PANEL ASSEMBLY

Center console upper panel assembly

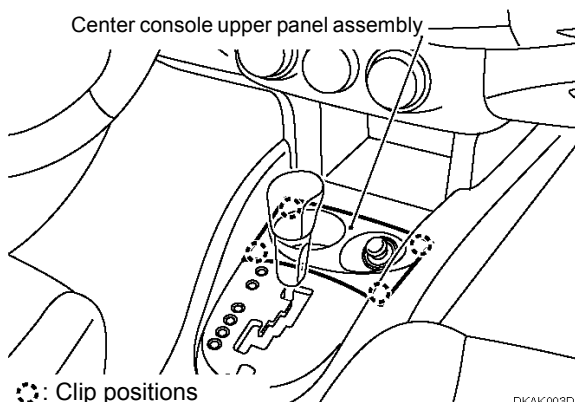


DKAK003D

This drawing shows CVT-A/T model.

- 1) Check that the ignition switch and light switch are off, then disconnect the battery (–) cable.
- 2) Remove the center console upper panel assembly in accordance with the workshop manual.

Check

## B. REMOVING THE ACCESSORY SOCKET


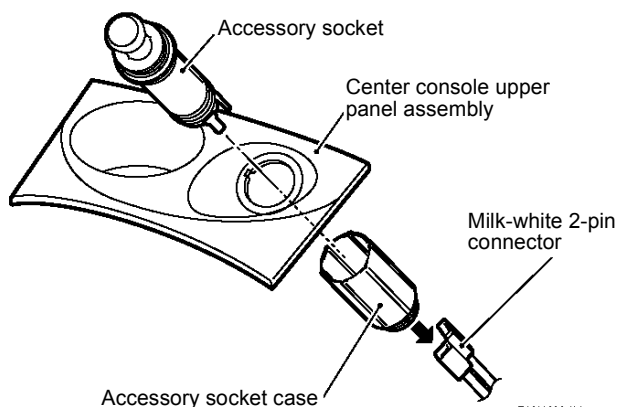


DKAK004H

- 1) Disconnect the milk-white 2-pin connector from the accessory socket.
- 2) Turn and remove the accessory socket case from the accessory socket.
- 3) Remove the accessory socket from the center console upper panel assembly.

Check

## C. INSTALLING THE CIGARETTE LIGHTER

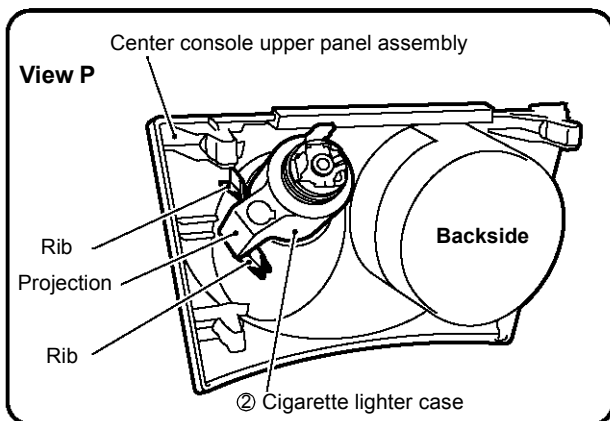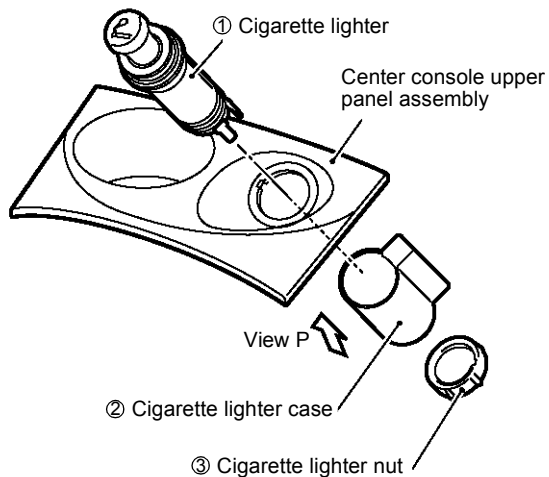

DKAK005H


- 1) Insert the cigarette lighter ① into the center console upper panel assembly where the accessory socket has been mounted.
- 2) As shown in View P, install the cigarette lighter case ② over the cigarette lighter ① with its projection located between the ribs at the back of the center console upper panel assembly.
- 3) Tighten the cigarette lighter nut ③ to secure the cigarette lighter ① and the cigarette lighter case ② in position.

Tightening torque: 2.5 – 4.5 N·m

- 4) Go to step D.


Check

## INSTALLATION PROCEDURES for LANCER Series

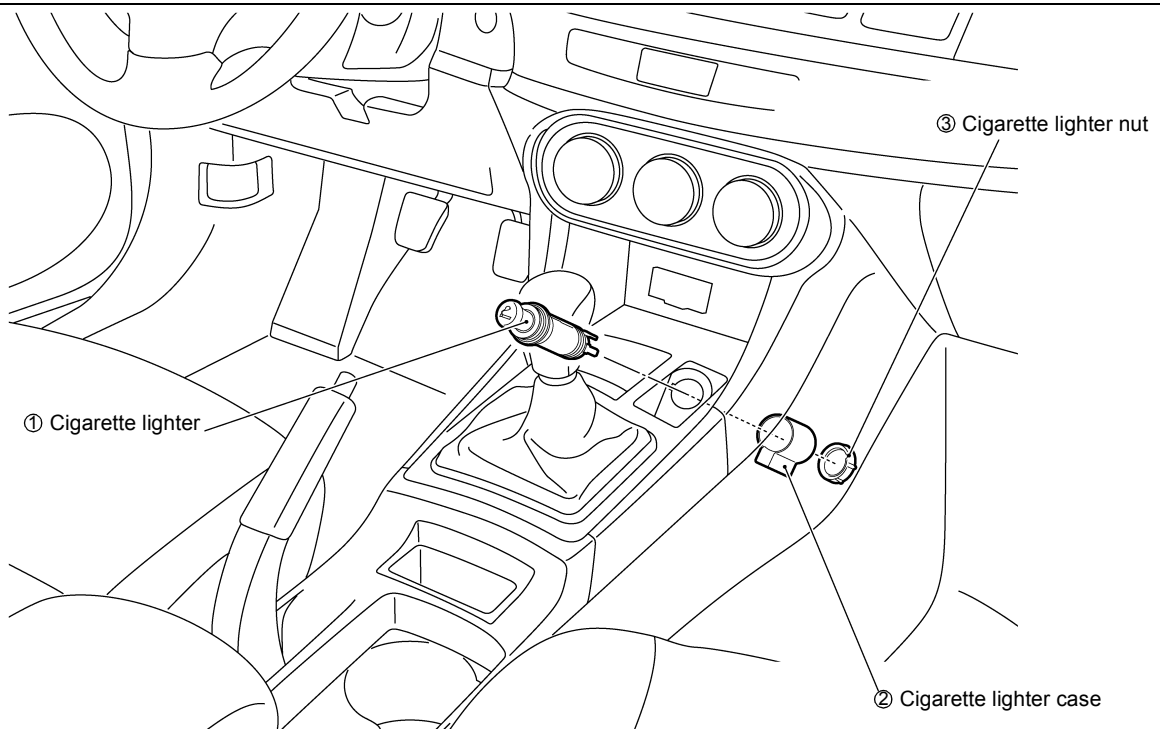


DKAP001F

## A. REMOVING THE FRONT FLOOR CONSOLE

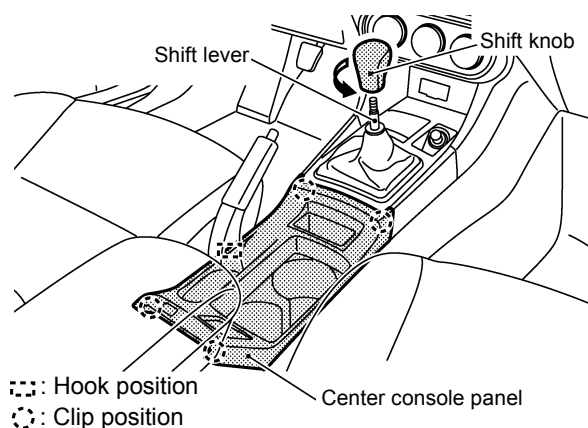

DKAP002D

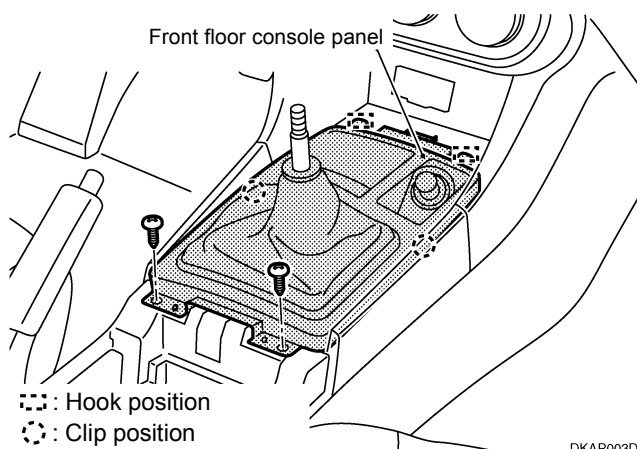

DKAP003D

These drawings show M/T model.


- 1) Check that the ignition switch and light switch are off, then disconnect the battery (–) cable.
- 2) Remove the center console panel assembly in accordance with the workshop manual.
- 3) Remove the shift lever and the front floor console panel in accordance with the workshop manual.

### Note

For LANCER series models (LANCER, LANCER SPORTBACK and LANCER EVOLUTION), refer to the applicable workshop manual for removing the center console panel and floor console panel.

Check

## B. REMOVING THE ACCESSORY SOCKET

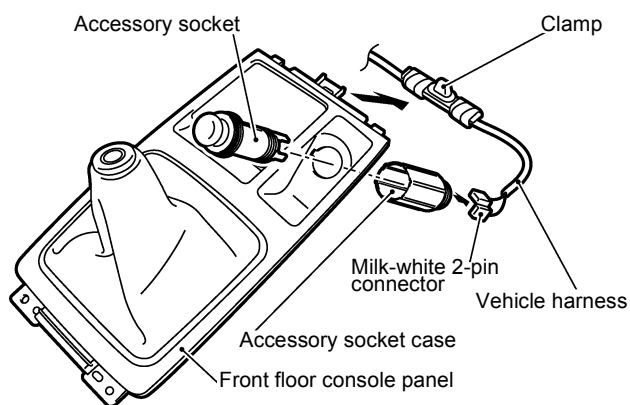


DKAP004H

- 1) Disconnect the milk-white 2-pin connector from the accessory socket.
- 2) Remove the clamp which fixes the vehicle harness from the front floor console panel.
- 3) Turn and remove the accessory socket case from the accessory socket.
- 4) Remove the accessory socket from the center console upper panel assembly.

Check

## C. INSTALLING THE CIGARETTE LIGHTER

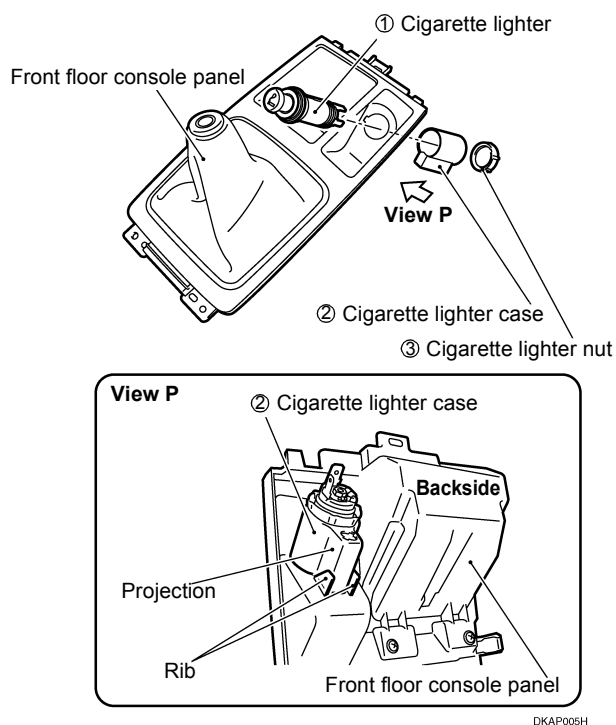


- 1) Insert the cigarette lighter ① into the front floor console panel where the accessory socket has been mounted.
- 2) As shown in View P, install the cigarette lighter case ② over the cigarette lighter ① with its projection located between the ribs at the back of the front floor console panel.
- 3) Tighten the cigarette lighter nut ③ to secure the cigarette lighter ① and the cigarette lighter case ② in position.

Tightening torque: 2.5 – 4.5 N·m

Check

## INSTALLATION PROCEDURES common to OUTLANDER and LANCER Series

### D. CONNECTING THE LIGHTER HARNESS

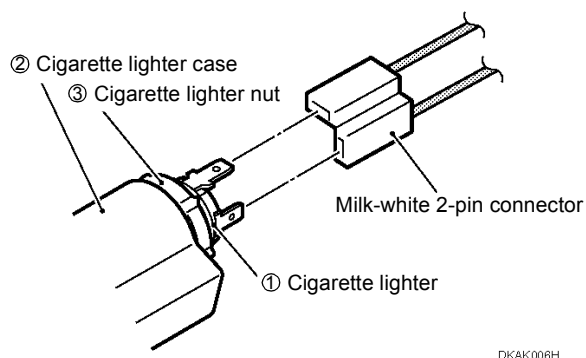

- 1) Connect the milk-white 2-pin connector to the cigarette lighter ①.




#### Caution

Be sure to route the harness so as not to interfere with the edges or the moving parts.

- 2) Fix the clamp of the vehicle harness to the front floor console panel. (LANCER only)

Check

### E. OPERATION CHECK

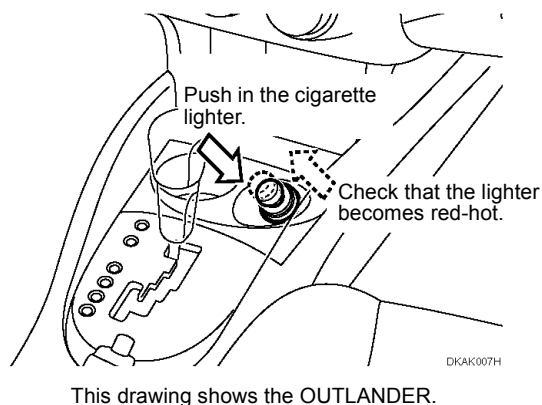


Perform the following operation check.



#### Caution

Do not touch the cigarette lighter for a few minutes after checking the operation as it is still hot.

Check

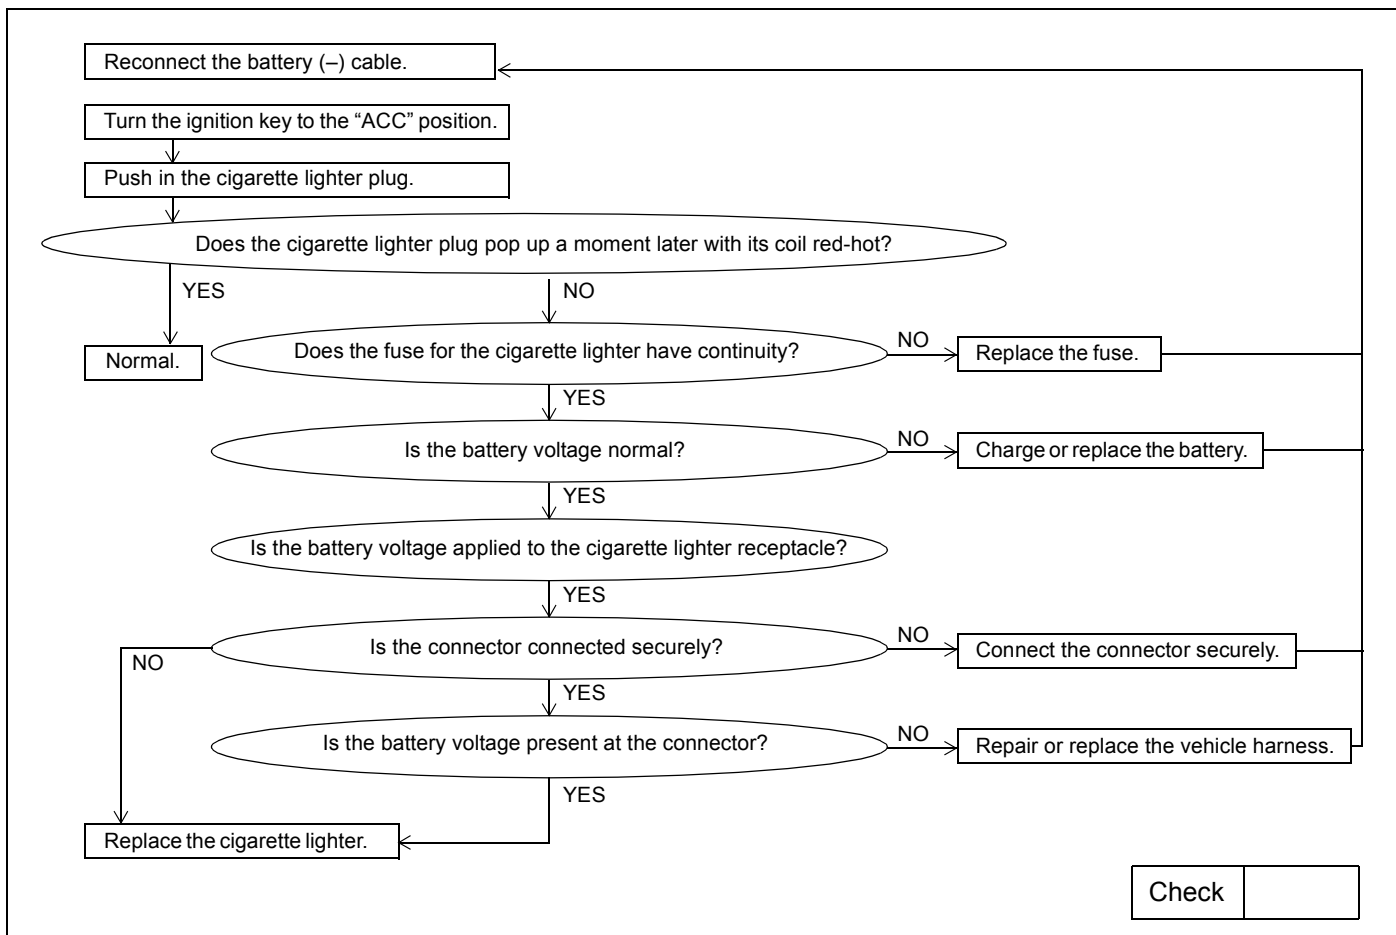

## F. REINSTALLING THE REMOVED PARTS

- 1) Check that the cigarette lighter nut is tightened firmly and the 2-pin connector is connected securely.
- 2) Reinstall the removed parts while taking care not to trap or cause tension to the cigarette lighter harness.


Check

## G. CHECKING AFTER INSTALLATION

- Check that the door lock, power windows, hazard warning lamps and other electrical systems operate correctly.
- Reprogram the radio and audio memories and adjust the clock. For the reprogramming procedure, refer to the owner's manual.

Check


## H. WIRING DIAGRAM

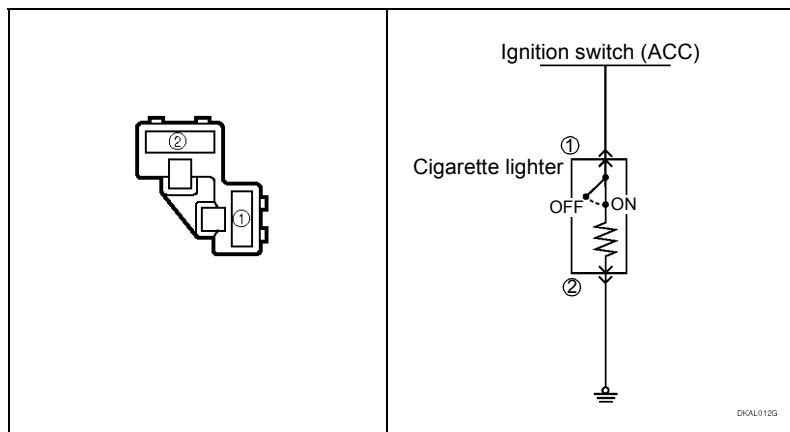

Check



## CIGAR LIGHTER for LANCER with Premium Console

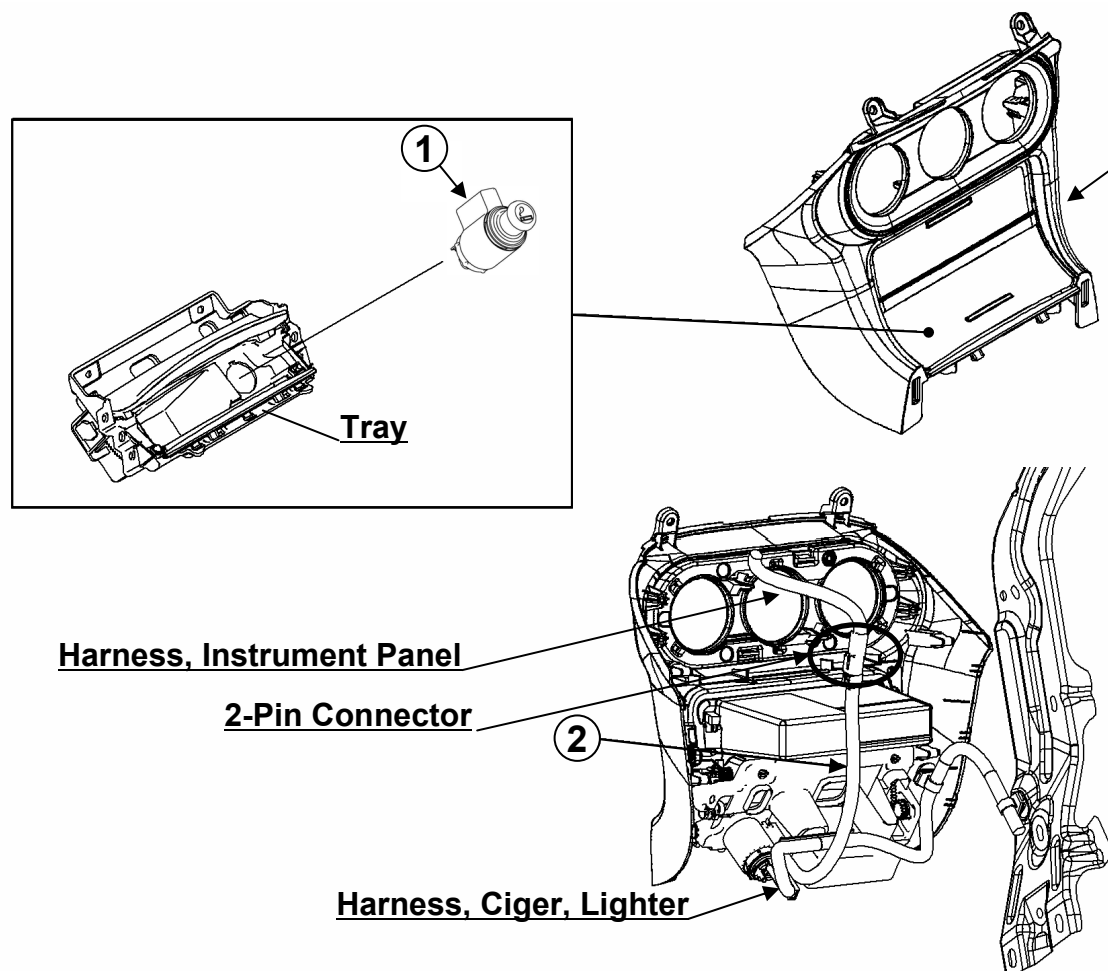

### Instrument Panel, Center Lower with Lid

1. On vehicles with premium console, remove the center lower instrument panel in accordance with the workshop manual.
2. Replace the accessory socket with the cigar lighter and connect the cigar lighter harness as shown in the drawing.
3. To illuminate the ring of the cigar lighter, the cigarette lighter illumination harness ② sold separately is required. Connect the 2-pin connector of the cigar lighter illumination harness ② to that of the instrument panel harness as shown in the drawing. Then install the lamp bulb into the round hole at the back of the tray.
4. Confirm that the harnesses are connected securely. Then reinstall the center lower instrument panel and other removed parts.



SYM	PART NAME	PART NO.	QTY
①	Cigar Lighter	MZ360133EX	1
②	Harness, Cigar Lighter Illumination (sold separately)	8010A191	1

## TO THE CUSTOMER HANDLING INSTRUCTIONS

## CIGARETTE LIGHTER KIT

Thank you for purchasing the Mitsubishi Genuine Accessory.  
Read this publication carefully to ensure correct use of the product in the best condition with proper knowledge of it.  
Keep this publication for reference when maintenance is required.

### Attention

- 1) Contained in the boxes marked  **Caution** and  **Note** are safety precautions that must be observed when the product is used.
- 2) If there is anything unclear about the usage of the product, contact your Mitsubishi Motors dealer for clarification.



### Caution

- Never modify the product.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.

## ■ HOW TO USE

This cigarette lighter can be used with the ignition switch in the “ACC” or “ON” position.  
Push in the cigarette lighter plug. It will return to its original position in approx. 20 seconds. Hold the knob, pull the lighter out and light your cigarette.



### Caution

After lighting a cigarette, return the plug into its receptacle immediately.



### Note

The driver should stop the vehicle before lighting a cigarette. Using the lighter while driving could cause loss of attention and an accident.