

OUTLANDER FLOOR MAT INSTALLATION AND HANDLING INSTRUCTIONS

RHD, CVT • A/T	MZ360126EX
LHD, CVT • A/T	MZ360235EX

Thank you for purchasing the Mitsubishi Genuine Accessory.
To install and use the product correctly with proper knowledge of it, read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

- This publication gives precautionary instructions in the boxes titled as follows.
Read through these instructions thoroughly.



Caution


Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.


To the dealer:
Be sure that the customer receives this publication.

■ COMPONENTS (Make sure that all of the following components were included in the kit.)

<RHD, A/T, CVT> MZ360126EX

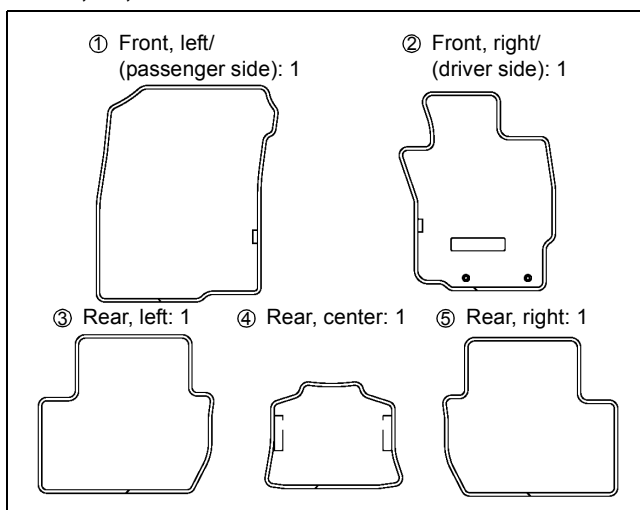


<LHD, A/T, CVT> MZ360235EX

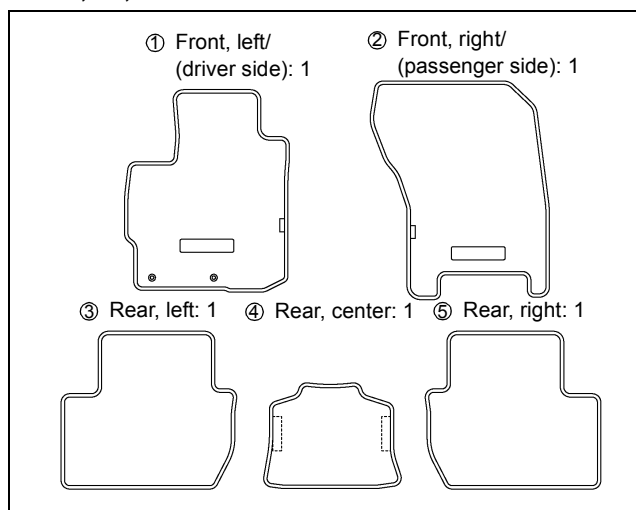

INSTALLATION PROCEDURES

A. INSTALLING DRIVER SIDE FLOOR MAT

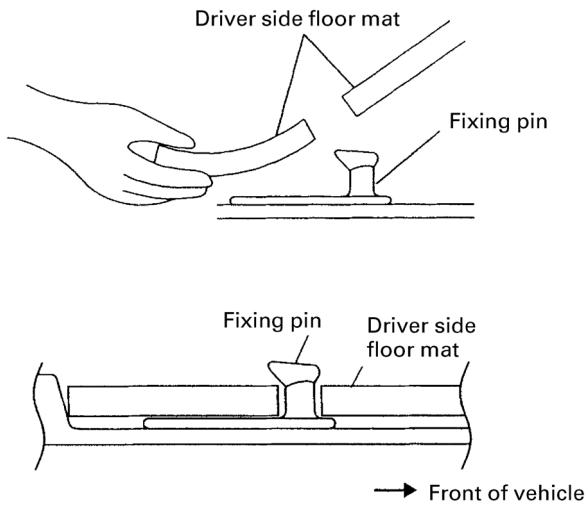

- 1) Slide the driver side seat to the rearmost.
- 2) Fit the 2 mounting holes of the floor mat on the fixing pins as shown in the illustration.




Caution

Confirm that the driver side floor mat is fixed securely by two fixing pins.

Check	
-------	--

B. INSTALLING OTHER FLOOR MATS

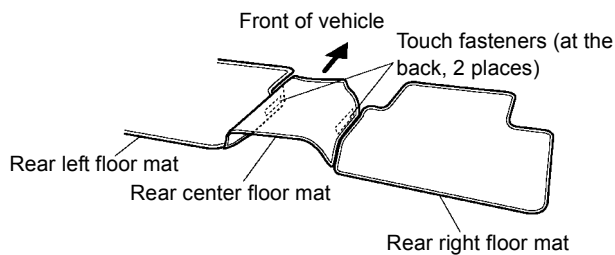


- 1) Install other floor mats to fit the shape of the floor. Be sure to install them in the correct direction.



Caution

- Be careful not to confuse the right and left rear mats.
- After positioning the mats properly, fix them securely by pressing the hook and loop fasteners at the back of the mats firmly against the floor.



Check	
-------	--

CARE AND HANDLING

- When removing the driver side floor mat, be careful not to damage the fixing pins.
- The floor mats are not resistible to oil products such as kerosene. Take care that the mats do not contact them.