



ASH CUP MZ360298EX INSTALLATION AND HANDLING INSTRUCTIONS

Applicable models	Grandis
	Eclipse / Eclipse Spider
	Outlander
	ASX / Outlander Sport

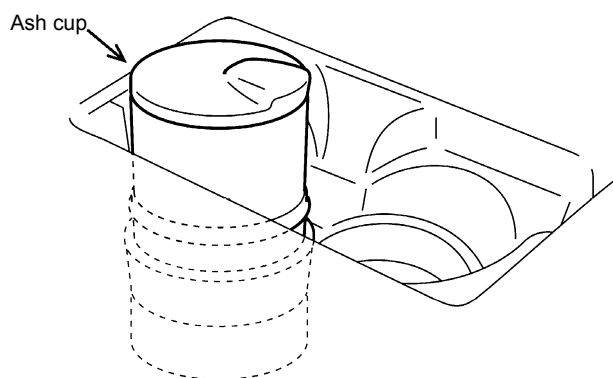

Eclipse and Eclipse Spider

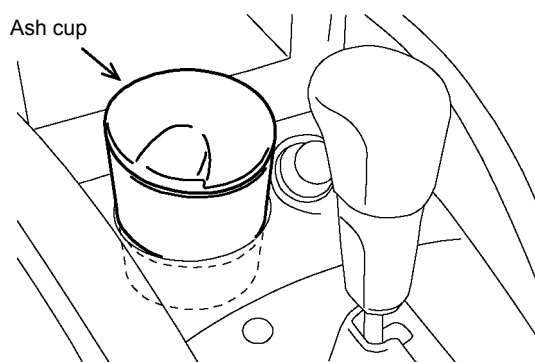

Outlander, ASX and Outlander Sport

Thank you for purchasing the Mitsubishi Genuine Accessory.
To install and use the product correctly with proper knowledge of it, read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

- This publication gives precautionary instructions in the boxes titled as follows.
Read through these instructions thoroughly.



Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



Note

Provides additional information that facilitates installation work.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:

Be sure that the customer receives this publication.

■ **COMPONENTS** (Make sure that all of the following components were included in the kit.)

① Ash cup: 1




INSTALLATION PROCEDURES

A. INSTALLING THE ASH CUP

A-1. For Grandis


- 1) Refer to the vehicle's workshop manual.

A-2. For Eclipse and Eclipse Spider

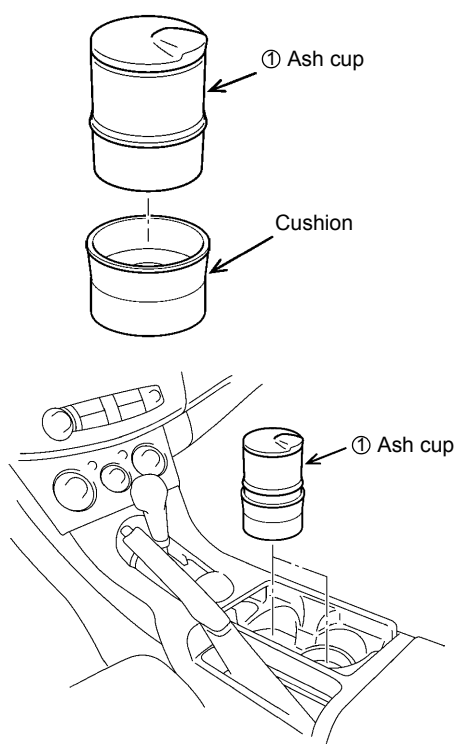

- 1) Remove the cushion from the inside of either of the vehicle's cup holders. (The ash cup ① can be installed in either of the cup holders.)
- 2) Attach the cushion to the ash cup ① as shown in the drawing. Be sure to push the ash cup ① all the way into the cushion so that it cannot come off easily.
- 3) Install the ash cup ① with cushion into the cup holder where you have removed the cushion.

A-3. For Outlander, ASX and Outlander Sport

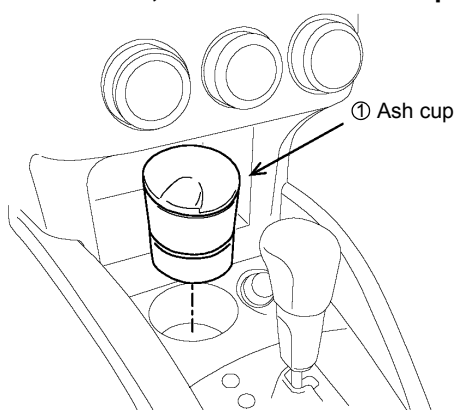

- 1) Install the ash cup ① at the position shown in the drawing (in the cup holder at the front of the shift lever). Be sure to push the ash cup ① all the way into the cup holder so that it is held in place.

Check

B. CHECKING AFTER INSTALLATION


- Check that the ash cup fits securely and squarely into the cup holder.

Check	
-------	--

CARE AND HANDLING

Handling

- Be sure to put out the cigarette butt and used match before throwing them into the ash cup. Close the ash cup after use. If the ash cup lid is kept open, other cigarette butts in the ash cup could catch fire.
- Do not leave the ash cup filled with cigarette butts. Do not place pieces of paper and other flammable materials in the ash cup. They could also catch fire.
- Keep the ash cup closed when it is not used. Avoid laying the ash cup on the seat or other places in the cabin, and hold the ash cup straight up before emptying it. Cigarette butts may be thrown out even if it is closed.
- Be careful not to drop the ash cup on a hard surface. Do not apply any stress to the opened ash cup lid. When removing the ash cup from or replacing it in the cup holder, close its lid and hold it by the body. Otherwise, it could be deformed or broken.
- If the cushion slips out of place during removing or reinstalling the ash cup, put it back into place as instructed in the Installation Procedures.

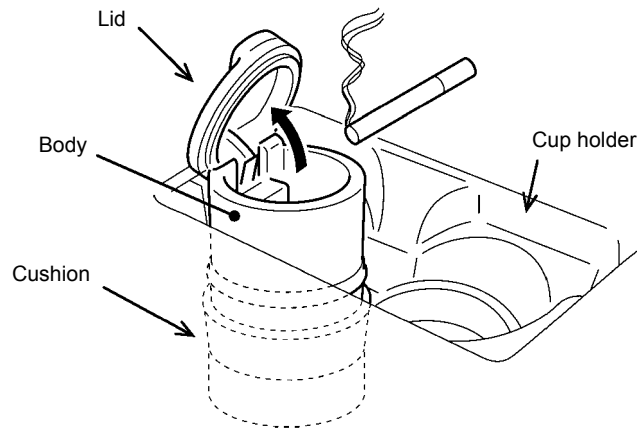

Care

- To clean the product, wipe with a soft material such as sponge or chamois leather.
- Do not use any hard material for cleaning such as a scrubbing brush, as it could scratch the surface.
- Do not use wax with compound, as it could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove the substance immediately by wiping with a soft cloth or chamois leather moistened with mild detergent, then wash the surface thoroughly with water.