


# LANCER FRONT MUDGUARD MZ380400EX INSTALLATION AND HANDLING INSTRUCTIONS

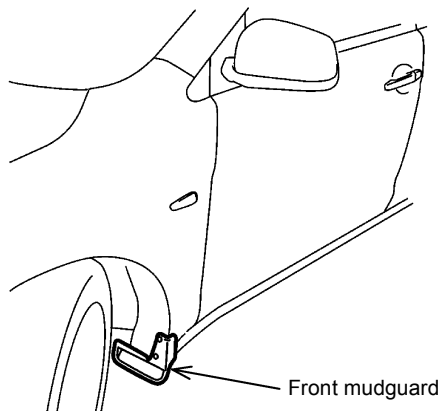

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



### Note

Provides additional information that facilitates installation work.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:

Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)

Socket wrench (10 mm)




Phillips screwdriver



Trim remover



Shop towel

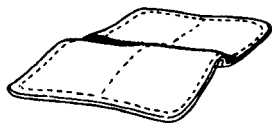


Isopropyl alcohol or degreaser




## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)


① Front mudguard: 2 (right and left, 1 each)

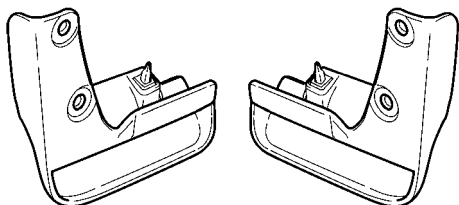

② Grommet: 4



③ Tapping screw (6 x 20): 4




## ■ PRECAUTIONS

- Perform the work in a well-ventilated space away from flames.
- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- The drawings in the Installation Procedures depict the installation of the left side parts. Install the right side parts in the same manner.

## INSTALLATION PROCEDURES

### A. INSTALLING THE FRONT MUDGUARD

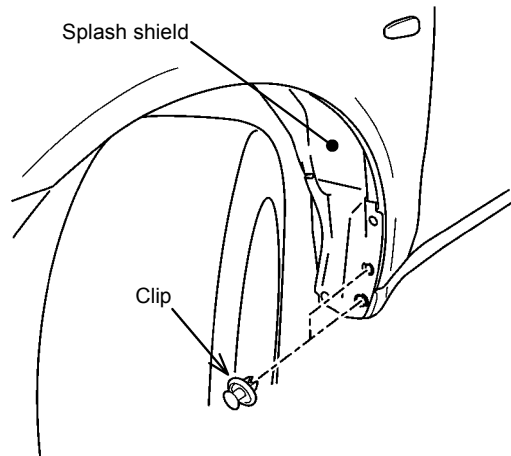

- 1) Remove the two splash shield mounting clips on the inside of the front wheelhouse.



#### Note


Turn the front wheel to face the leftmost position to facilitate the work (rightmost position when working on the right side).

- 2) Clean and degrease the front mudguard mounting position using isopropyl alcohol or degreaser.




#### Caution


Never use organic solvent such as thinner, benzine, gasoline, etc.

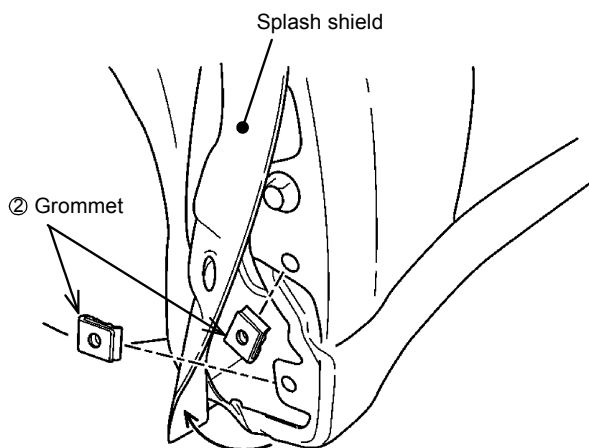

- 3) Pull the splash shield forward and install the two grommets ② over the clip holes as shown in the drawing.

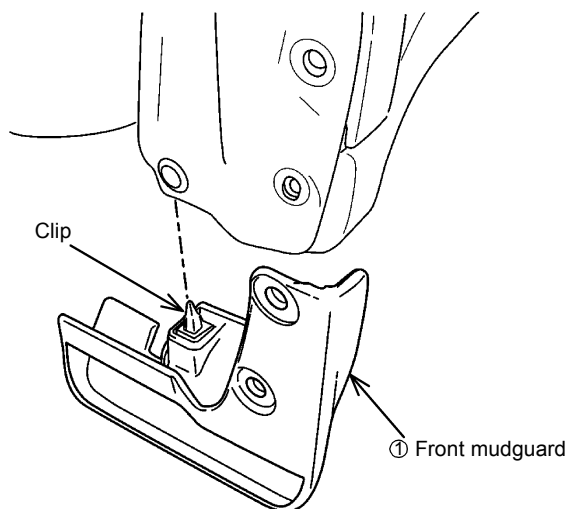

- 4) Insert the clip on the front mudguard ① into the square hole at the bottom of the vehicle.

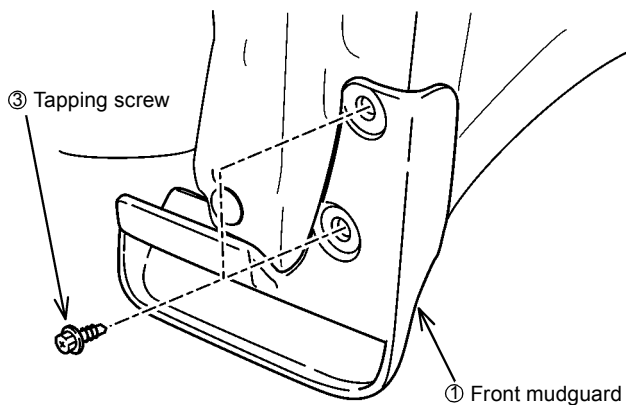

5) Loosely tighten the tapping screws ③. Adjust the position of the front mudguard ① so that there is no clearance between the mudguard ① and the body and then tighten the tapping screws ③ securely.

Check	
-------	--

## B. CHECKING AFTER INSTALLATION

- Check that the screws are tightened securely. Retighten as necessary.
- Check that there is no clearance between the front mudguard and the body.

Check	
-------	--

## CARE AND HANDLING

- To clean the product, wipe with a soft material, such as sponge or chamois leather.
- Do not use any hard material for cleaning such as a scrubbing brush. It could scratch the surface.
- Do not use wax with compound. It could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove the substance immediately by wiping with a soft cloth or chamois leather moistened with a mild detergent, then wash the surface completely with water.