

# OUTLANDER (2010–) FRONT BUMPER GARNISH MZ380544EX INSTALLATION AND HANDLING INSTRUCTIONS



Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



### Note

Provides additional information that facilitates installation work.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:


Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)


Socket wrench (10)



Extension bar



Phillips screwdriver




Trim remover




## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)

① Front bumper garnish: 1

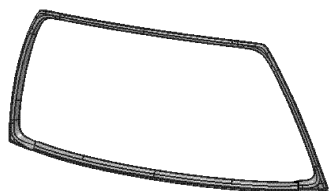

② Installation and Handling Instructions  
(this document): 1




## ■ PRECAUTIONS

- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- If any electrical part is installed on the front bumper: Disconnecting the (–) cable from the battery causes the radio and audio presets, the clock, etc. to lose their memory. Record the contents of the memory before disconnecting the battery (–) cable to allow you to reprogram the radio presets after the installation is completed. (For the reprogramming procedure, refer to the owner's handbook.)
- Be sure to connect the harnesses securely.

## INSTALLATION PROCEDURES

### A. REMOVING THE EXISTING GARNISH

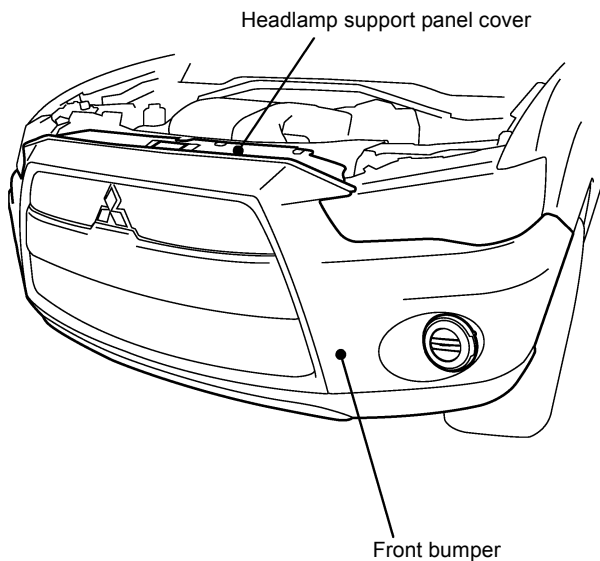

- 1) Disconnect the battery (–) cable from the battery if any electrical part is installed to the bumper.
- 2) Remove the headlamp support panel cover and front bumper in accordance with the workshop manual. Keep the removed parts as they will be reused.



#### Note

**If the fog lamps and/or headlamp washers are installed on the bumper, be sure to disconnect their connectors, etc. before removing the bumper.**

- 3) Remove the existing front bumper garnish from the front bumper by removing the 19 screws from the backside of the bumper. Keep the removed screws as they will be reused.

Check	
-------	--

### B. INSTALLING THE FRONT BUMPER GARNISH

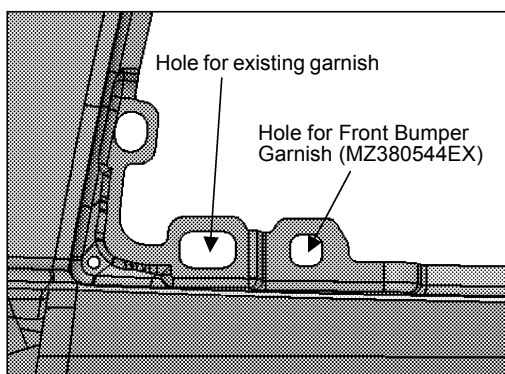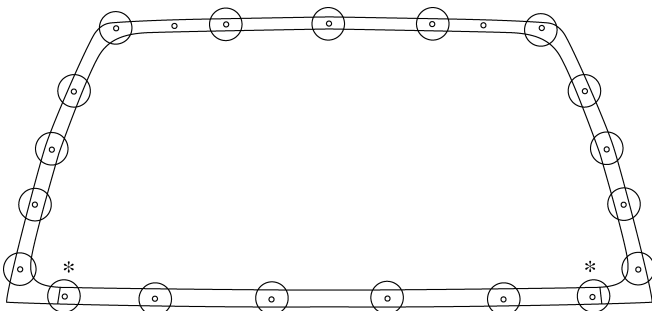

Enlarged view of the bottom edge (from the backside of bumper)

- 1) Install the Front Bumper Garnish using the removed 19 screws. Care should be taken when tightening the bottom left and right screws (marked “\*” in the drawing). Each should be tightened through a hole at the inside of the formerly-used hole as shown in the drawing.

Check	
-------	--

### **C. REINSTALLING THE FRONT BUMPER**

- 1) Reinstall the front bumper and the headlamp support cover in accordance with the workshop manual. Be sure to reconnect the connectors, etc. disconnected at the time of removal.

Check	
-------	--

### **D. CHECKING AFTER INSTALLATION**

- 1) Check that all the fasteners are fastened firmly.
- 2) Connect the battery negative terminal if the terminal has been disconnected.  
Check the operations of the electrical parts on the front bumper. Reprogram the radio and audio memories and adjust the clock. (For the reprogramming procedure, refer to the owner's handbook.)

Check	
-------	--

## **CARE AND HANDLING**

- To clean the product, wipe with soft material, such as sponge or chamois leather.
- Do not use any hard material for cleaning, such as a scrubbing brush. It could scratch the surface.
- Do not use wax with compound. It could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove it immediately by wiping with a mild detergent-moistened soft cloth or chamois leather, then wash the surface completely with water.