


# ASX / OUTLANDER SPORT FRONT BUMPER GARNISH (CHROME-PLATED) MZ380564EX INSTALLATION AND HANDLING INSTRUCTIONS

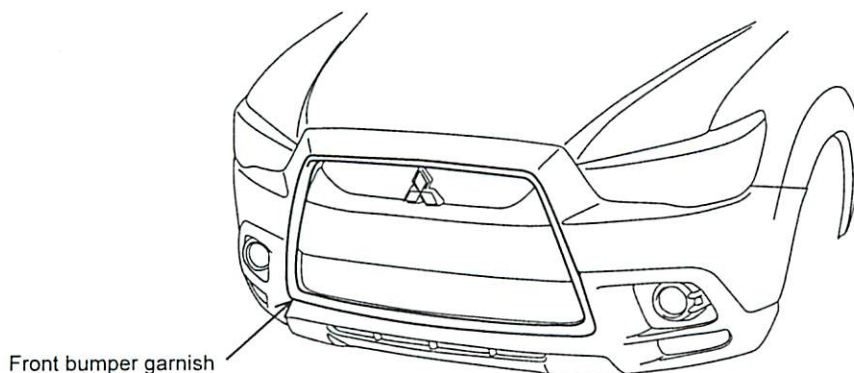

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



### Note




Provides additional information that facilitates installation work.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:


Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)



## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)

- ① Side garnish: 2  
(right and left, 1 each)




- ② Upper garnish: 1



- ③ Lower garnish: 1



- ④ Installation and Handling  
Instructions  
(this document): 1




## ■ PRECAUTIONS

- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.

## INSTALLATION PROCEDURES


### A. PREPARATORY WORK

Headlamp support upper panel cover

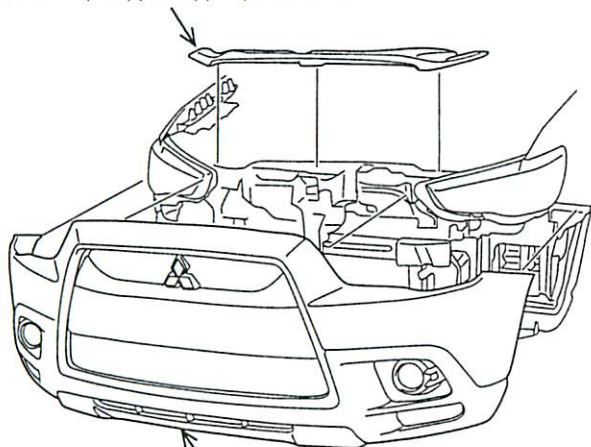

Front bumper assembly

Front bumper assembly

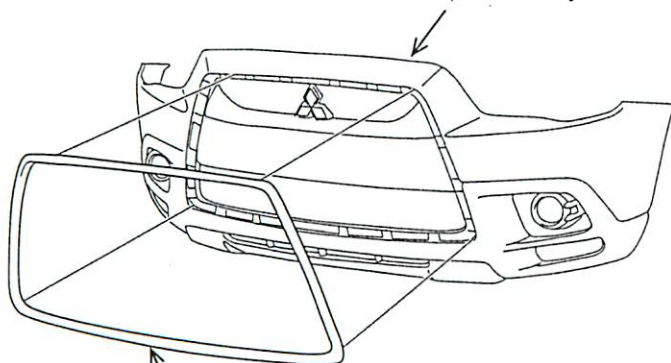

Front bumper center garnish

- 1) Remove the headlamp support upper panel cover and the front bumper assembly in accordance with the workshop manual.

- 2) From the backside of the front bumper assembly, remove the 18 screws to remove the front bumper center garnish.




### Caution

Keep the screws as they will be reused.  
(The center garnish will not be reused.)

Check



## B. INSTALLING THE GRILLE GARNISH

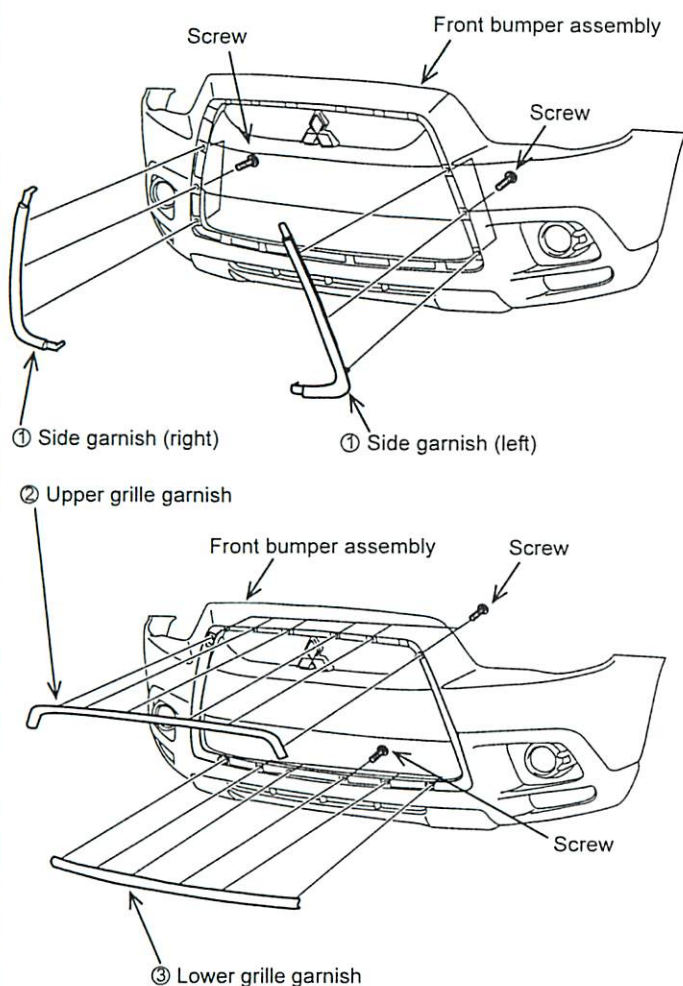

- 1) Install the right and left side garnishes ① to the front bumper assembly by lightly tightening the six screws.
- 2) Install the upper grille garnish ② and lower grille garnish ③ by lightly tightening the 12 screws.
- 3) Check that the garnishes are properly positioned. Then fully tighten all the 18 screws.
- 4) Reinstall the removed parts in accordance with the workshop manual.

Check	
-------	--

## C. CHECKING AFTER INSTALLATION

- 1) Check that all the parts are installed properly and securely.

Check	
-------	--

## CARE AND HANDLING

- To clean the product, wipe with soft material, such as sponge or chamois leather.
- Do not use any hard material for cleaning, such as a scrubbing brush. It could scratch the surface.
- Do not use wax with abrasive. It could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove it immediately by wiping with a mild detergent-moistened soft cloth or chamois leather, then wash the surface completely with water.