


LANCER

AIR CONDITIONER DIAL COVER

MZ525640EX

INSTALLATION AND HANDLING INSTRUCTIONS



Thank you for purchasing the Mitsubishi Genuine Accessory.
To install and use the product correctly with proper knowledge of it, read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

- This publication gives precautionary instructions in the boxes titled as follows.
Read through these instructions thoroughly.



Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



Note

Provides additional information that facilitates installation work.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:

Be sure that the customer receives this publication.

■ TOOLS (Make the following tools ready for use.)

Shop towel



Dryer




Isopropyl alcohol or degreaser




■ COMPONENTS (Make sure that all of the following components were included in the kit.)

① Air conditioner dial cover: 3



② Installation and Handling Instructions: 1
(this document)




■ PRECAUTIONS

- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- Be sure to wipe off dust and oil from the surfaces where adhesive tape is to be attached using a clean shop towel moistened with isopropyl alcohol or degreaser. Never use organic solvent such as thinner, benzene, gasoline, etc.
- The drawings in the Installation Procedure depict the installation of one dial cover. Install the rest two dial covers in the same manner.

INSTALLATION PROCEDURES

A. INSTALLING THE COVER

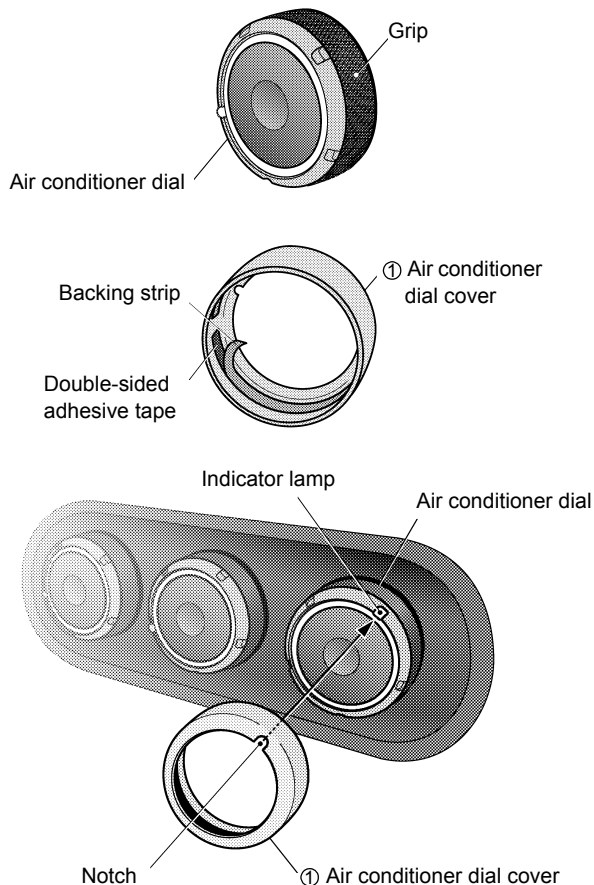

- 1) Wipe off oil and dust from the grip section of each air conditioner dial using clean shop towel moistened with isopropyl alcohol or degreaser.
- 2) Peel off the backing strip from the inside of the air conditioner dial cover ①.
- 3) Align the notch on the air conditioner dial cover ① with the indicator lamp on the air conditioner dial, and push the cover until it seats the dial securely.

Note

- As the double-sided adhesive tape is elastic, push and hold the cover ① until it stays in position.
- Low ambient temperature hardens the double-sided adhesive tape. In such a case, warm the tape using a dryer as necessary.

Check	
-------	--

B. CHECKING AFTER INSTALLATION

Turn the dials to check for any looseness or any unsmooth operation.

Check	
-------	--

CARE AND HANDLING



Caution

This aluminum cover may become very hot when the cabin temperature rises.

- To clean the product, wipe with dry, soft cloth.
- Do not use any solvent or compound.