


# OUTLANDER (2010–) / ASX / OUTLANDER SPORT DOOR MIRROR COVER (chrome, for mirrors with turn signal lamps) MZ569195EX INSTALLATION AND HANDLING INSTRUCTIONS

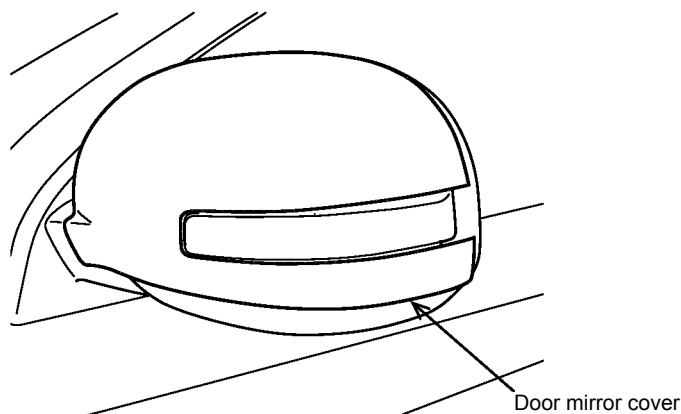

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



### Note

Provides additional information that facilitates installation work.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.


To the dealer:  
Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)


Shop towel





Isopropyl alcohol or degreaser



Dryer




Primer (for adhering acryl foam tape and ASA)\*




\* Required if the vehicle's body color is Black Mica or the vehicle's door mirrors have a material black finish.

## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)

① Door mirror cover: 2 (left and right, 1 each)

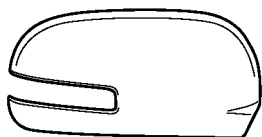


Right

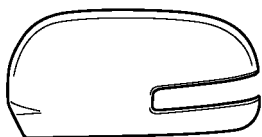

Left

② Black tape: 2 (left and right, 1 each)




## ■ PRECAUTIONS



- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- The drawings in the Installation Procedures depict the installation of the left side parts. Install the right side parts in the same manner.

# INSTALLATION PROCEDURES


## A. PREPARATORY WORK

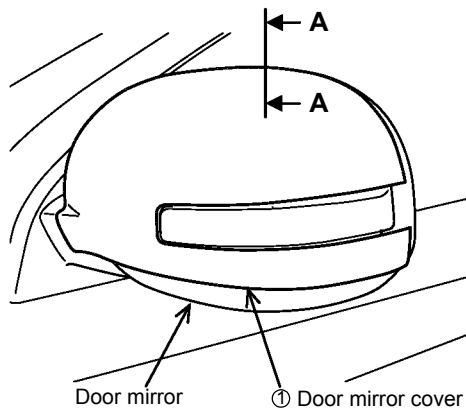

### Section A-A

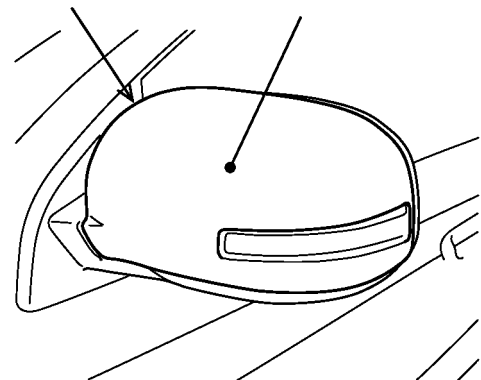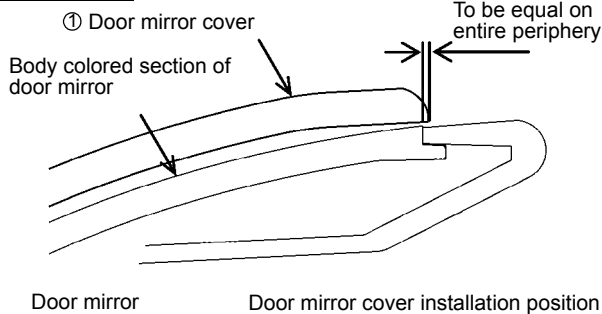

Primer application position

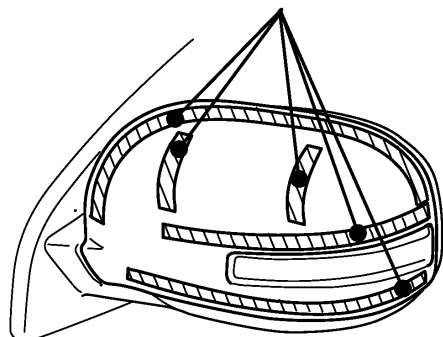

- 1) Set the door mirror cover ① over the door mirror to confirm its mounting position. It should be installed to hide the body colored section of the mirror completely. (This step is vital for proper installation.)

- 2) Clean and degrease the door mirror cover ① installation position, especially the tape application sections, using clean shop towel and isopropyl alcohol or degreaser.

### **Caution**

- Perform this step at a well-ventilated place. Keep away from flames.
- Never use organic solvent such as thinner, benzene, gasoline, etc.




- 3) If the vehicle's body color is Black Mica or the vehicle's door mirrors have material black finish: Apply the primer on the tape application positions on the door mirror lightly and evenly, then cure for approx. 3 minutes

### **Caution**

- The primer application position becomes glossy. Be careful not to make the primer contact other than the tape application positions.
- Do not apply the primer thickly.

Check

## B. INSTALLING THE DOOR MIRROR COVER

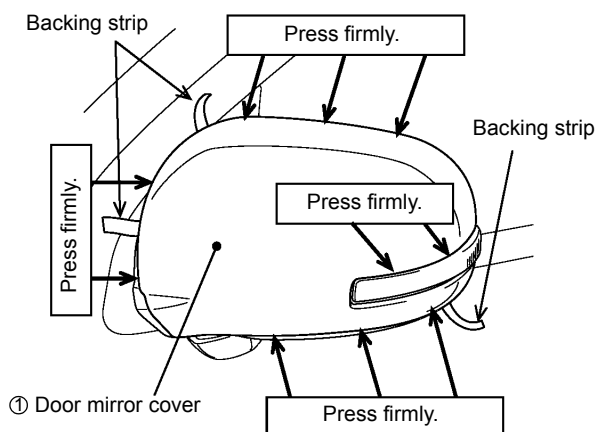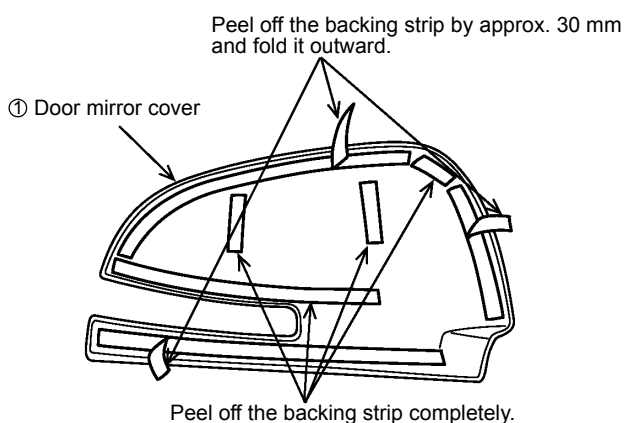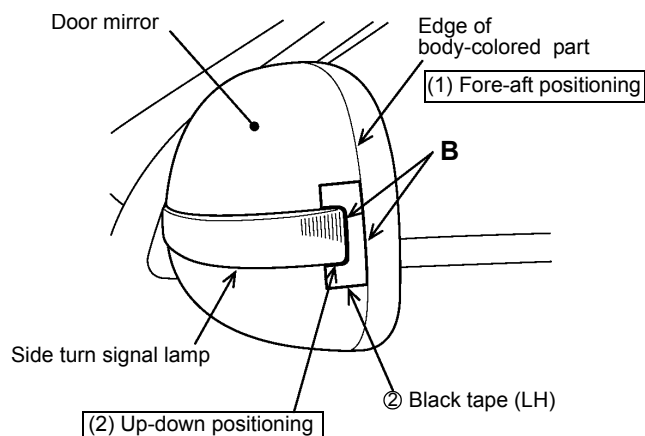

- 1) Attach the black tape ② smoothly at the position shown in the drawing. It should be applied to mask the body-colored section (B).

To apply the black tape ②:

- (1) Align with the edge of the body-colored part (fore-aft position)
- (2) Align with the edge of the turn signal lamp (up-down position)

### Note

Be careful not to mix up the right and left tape.

- 2) Peel off the backing strip of the adhesive tape attached at the back of the door mirror cover ①.

### Note

- Be sure not to touch the adhesive surface of the adhesive tape by a dirty hand or glove, or remove and reapply the adhesive tape. Doing so makes the tape lose much of its adhesion.
- Low ambient temperature (below 15°C) greatly reduces the adhesive strength of adhesive tape, which can cause peeling off. Work in a warm place or warm the adhesive tape using a dryer.

- 3) Position the door mirror cover ① carefully over the door mirror. Lift up the cover ① slightly and peel off the remaining backing strips. Then press the cover ① firmly against the door mirror.

### Note

Position the cover carefully so that the body-colored section cannot be seen around the cover ①.  
(Refer to A-1, Section A-A.)

Check

## C. CHECKING AFTER INSTALLATION

- 1) Press the door mirror cover ① firmly against the door mirror again to ensure secure installation.



### Caution

Do not wash the vehicle for 24 hours after attaching the product otherwise it may peel off. Even if washing or waxing is necessary, wait at least 6 hours. Keep the vehicle out of the rain and other water during this period.

Check	
-------	--

## CARE AND HANDLING

The chrome-plated surface of this product may corrode if it is left without care. Clean the product diligently.

- To clean the product, wipe with soft material, such as sponge or chamois leather.
- Do not use any hard material for cleaning, such as a scrubbing brush. It could scratch the surface.
- Do not use wax with abrasive. It could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove it immediately by wiping with a mild detergent-moistened soft cloth or chamois leather, then wash the surface completely with water.