


LANCER

DOOR MIRROR COVER (CHROME)

MZ569719EX

INSTALLATION AND HANDLING INSTRUCTIONS

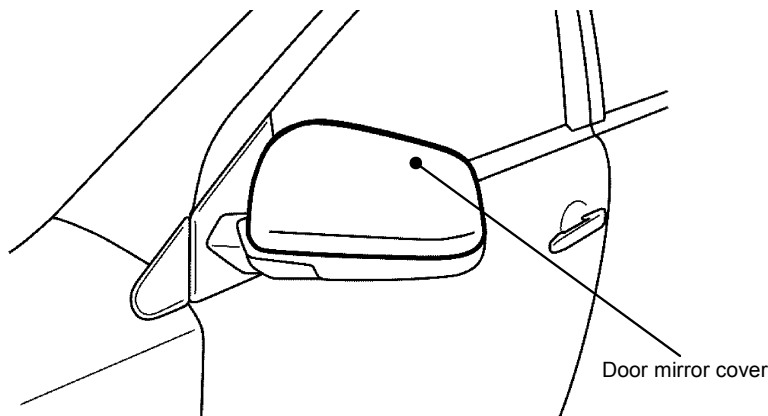

Thank you for purchasing the Mitsubishi Genuine Accessory.
To install and use the product correctly with proper knowledge of it, read this publication carefully.
Keep this publication for reference when maintenance is required.

Attention

- This publication gives precautionary instructions in the boxes titled as follows.
Read through these instructions thoroughly.



Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



Note

Provides additional information that facilitates installation work.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:

Be sure that the customer receives this publication.

■ TOOLS (Make the following tools ready for use.)

Flat blade screwdriver (medium)

Trim remover

Vinyl tape

Shop towel


Primer*



*: Prepare the primer which fits for the acrylate styrene acrylonitrile (ASA).

■ COMPONENTS (Make sure that all of the following components were included in the kit.)

① Door mirror cover: 2 (left and right, 1 each)

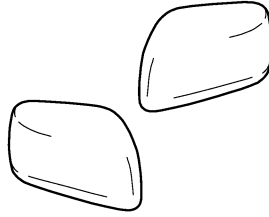

■ PRECAUTIONS


- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- Be careful not to damage the vehicle.
- The illustrations in the Installation Procedures depict the installation of the left side part. Install the other parts in the same manner.

For vehicles with heated door mirrors:

- Disconnecting the (–) cable from the battery causes the radio and audio presets, the clock, etc. to lose their memory. Record the contents of the memory before disconnecting the battery (–) cable to allow you to reprogram the radio presets after the installation is completed.

INSTALLATION PROCEDURES


A. REMOVING THE MIRROR

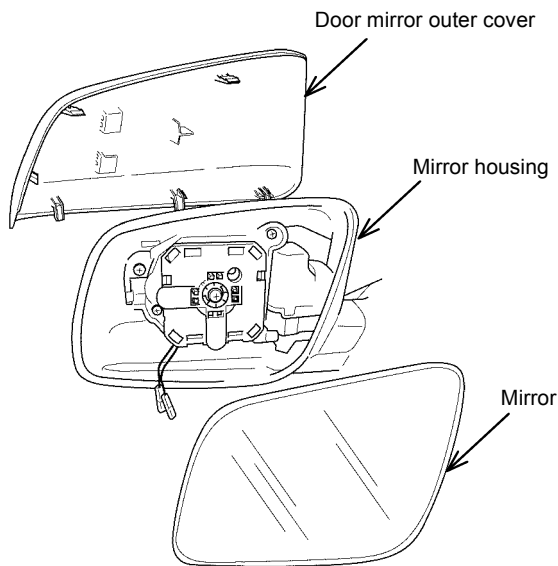


Note

Refer to the workshop manual for details of the removal procedure.

- 1) On vehicles with heated door mirrors, disconnect the battery negative cable.
- 2) Push in the upper side of the mirror to make an access to the backside of the mirror at its bottom side.

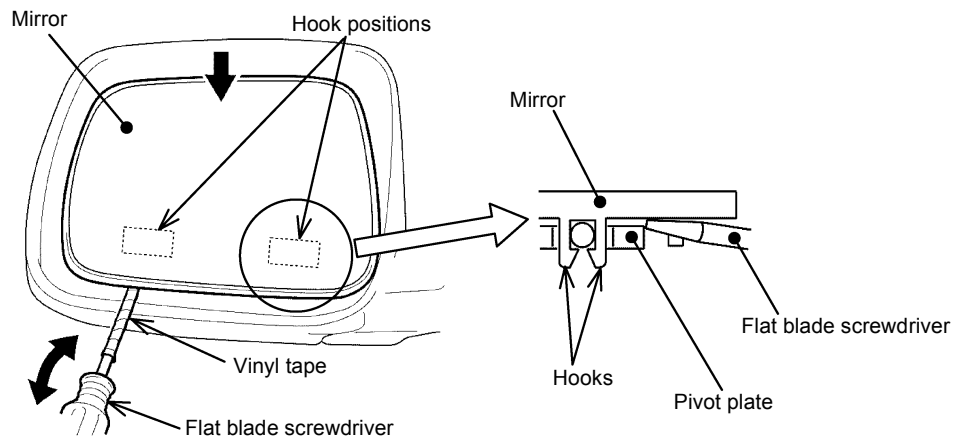


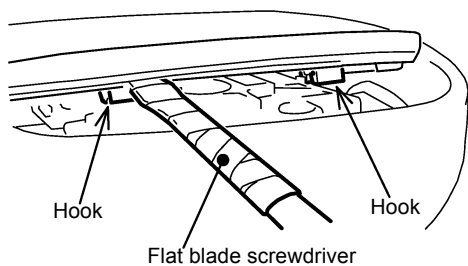

- 3) Insert a flat blade screwdriver wrapped with vinyl tape between the pivot plate and mirror. Pry and release the hooks to disengage the lower side of the mirror from the pivot plate.
- 4) Pull down and release the upper side of the mirror to remove the mirror.
- 5) On vehicles with heated door mirrors, disconnect two heater terminals at the back of the mirror.

Check	
-------	--

B. REMOVING THE DOOR MIRROR OUTER COVER

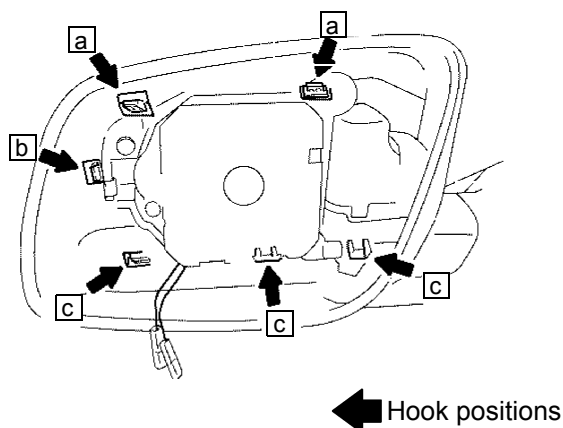

- 1) Remove the door mirror outer cover from the mirror housing by releasing the hooks [a] to [c] in this order.




Caution

Be careful not to damage the hooks and mirror housing.

Check	
-------	--

C. INSTALLING THE DOOR MIRROR COVER



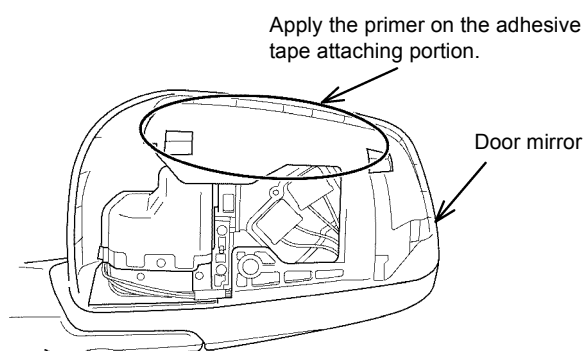


- 1) Wipe clean the three adhesive tape attaching portions on the mirror housing shown in the drawing with clean shop towel moistened with neutral detergent.
- 2) Apply the primer evenly on these adhesive tape attaching portions. Dry for approx. 3 minutes.



Caution

Be careful not to adhere the primer other than the tape attaching surface. If it adheres on the resin surface, the surface will become glossy.

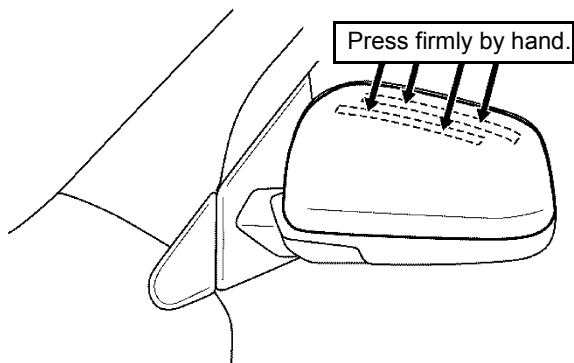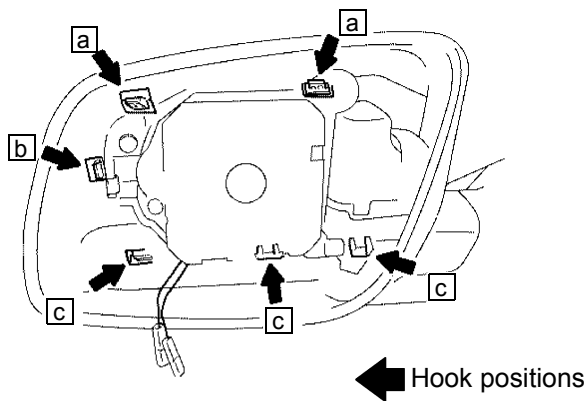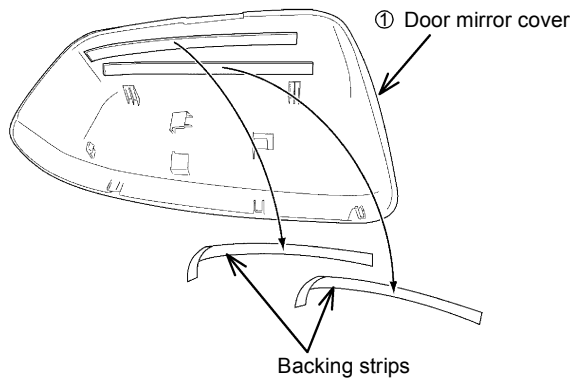

- 3) Peel off all the backing strips at the inside of the door mirror cover ①.



Caution

Adhesive tape loses much of its adhesion if the adhesive surface is touched by a dirty hand or glove. If the adhesion is reduced, replace the adhesive tape.

- 4) Fit the door mirror cover ① over the mirror housing and securely engage the hooks [a] to [c].



Caution

Do not fit the door mirror cover ① forcibly. Forced installation may cause deformation or damage of the mirror cover or mirror housing.



Note

Refer to the workshop manual for details of the installation.

- 5) Make sure the hooks are securely engaged with the mirror housing. Then press the door mirror cover ① firmly against the mirror housing to adhere the adhesive tape securely.

- 6) On vehicles with heated door mirrors, reconnect the two heater terminals securely.



Note

You may connect each terminal to either mating terminal.

- 7) Reinstall the mirror to the mirror housing.

Check	
-------	--

D. CHECKING AFTER INSTALLATION

- Check that the mirror is installed securely without any looseness or deformation.

On vehicles with heated door mirror:

- Reconnect the battery negative cable. Check the operation of the mirror and mirror heater.
- Reprogram the radio and audio memories and adjust the clock. For the reprogramming procedure, refer to the owner's handbook.



Caution

Do not wash the vehicle for 24 hours after attaching the product otherwise it may peel off. Even if washing or waxing is necessary, wait at least 6 hours. Keep the vehicle out of the rain and other water during this period.

Check	
-------	--

CARE AND HANDLING

- To clean the product, wipe with a soft material such as sponge or chamois leather.
- Do not use any hard material for cleaning such as a scrubbing brush, as it could scratch the surface.
- Do not use wax with compound, as it could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove the substance immediately by wiping with a soft cloth or chamois leather moistened with mild detergent, then wash the surface thoroughly with water.