


# PAJERO / MONTERO MUFFLER CUTTER INSTALLATION AND HANDLING INSTRUCTIONS

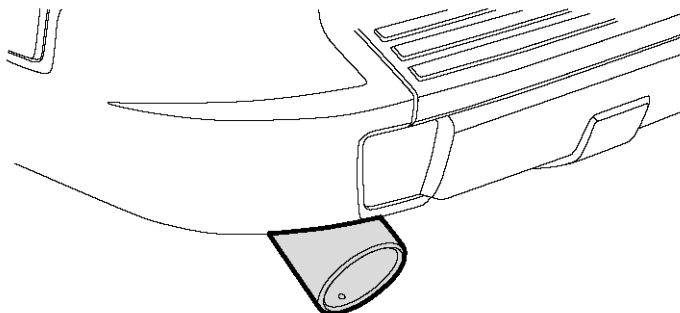

This drawing shows MZ574513EX.

Part No.	Applicable models
MZ574512EX	Short body
MZ574513EX	Long body, gasoline engine
MZ380397EX	Long body, diesel engine

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



### Note


Provides additional information that facilitates installation work.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.


To the dealer:  
Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)

Socket wrench (size: 10)




Torque wrench




## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)


① Muffler cutter: 1



MZ574512EX



MZ574513EX




MZ380397EX

## ■ PRECAUTIONS

- Be sure to apply the parking brake securely. Remove the ignition key from its key cylinder.
- Do not work just after turning off the engine, or when the tail pipe and the muffler is still hot.


## INSTALLATION PROCEDURES

### A. INSTALLING THE MUFFLER CUTTER

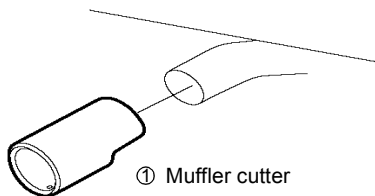


① Muffler cutter


Short body models (MZ574512EX)



Long body, gasoline engine models (MZ574513EX)



Long body, diesel engine models (MZ380397EX)



Bolt: M6

- 1) Loosen the bolt on the muffler cutter ① and put it over the end of the tail pipe



### Caution

Be careful not to damage the hooks and mirror housing.

- 2) Set the muffler cutter ① so that the tip of the tail pipe is in contact with the backside of the curled section of the muffler cutter ①, with its mounting bolt and drain hole at its lowermost position, as shown in the drawing. Then tighten the mounting bolt (M6) securely.

Check

### B. CHECKING AFTER INSTALLATION

- Check that the product is mounted securely without looseness.
- Test drive and then retighten the mounting bolt.

Check