


# ASX / OUTLANDER SPORT FOG LAMP BEZEL (CHROME-PLATED) MZ575683EX INSTALLATION AND HANDLING INSTRUCTIONS

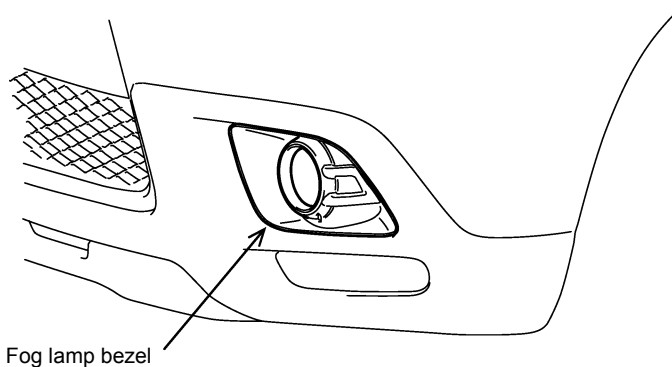

This product is used in combination with the fog lamps sold separately.

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Caution

Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.



### Note

Provides additional information that facilitates installation work.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:

Be sure that the customer receives this publication.


## ■ TOOLS (Make the following tools ready for use.)

Trim remover




## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)

- ① Fog lamp bezel: 2  
(right and left, 1 each)



- ② Installation and Handling Instructions  
(this document): 1




## ■ PRECAUTIONS

- Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- The drawing in the Installation Procedures depict the installation of the left side part. Install the right side part in the same manner.

## INSTALLATION PROCEDURES

### A. INSTALLING THE FOG LAMP BEZEL

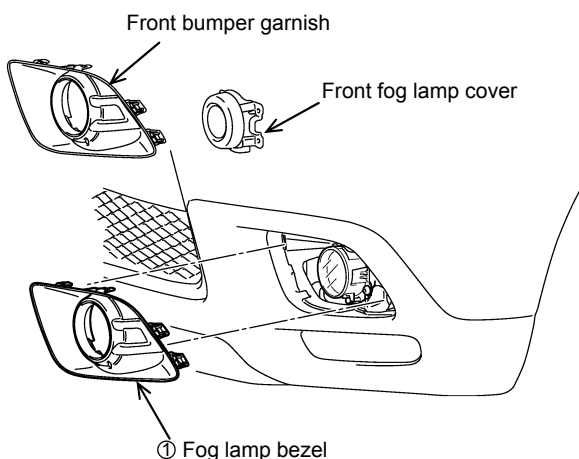

- 1) Install the fog lamps (sold separately).
- 2) Install the fog lamp bezels ① to the front bumper in place of the removed front bumper garnishes (and front fog lamp covers).

Check

### B. CHECKING AFTER INSTALLATION

- 1) Check that the bezels are installed properly and securely.

Check

## CARE AND HANDLING

- To clean the product, wipe with soft material, such as sponge or chamois leather.
- Do not use any hard material for cleaning, such as a scrubbing brush. It could scratch the surface.
- Do not use wax with abrasive. It could damage the surface.
- Take care to prevent contact with gasoline, kerosene, brake fluid, engine oil, grease, paint thinner, sulfuric acid (battery electrolyte) and wax remover that could cause discoloration, staining and cracking. Should any of them contact the surface, remove it immediately by wiping with a mild detergent-moistened soft cloth or chamois leather, then wash the surface completely with water.