


# PAJERO / MONTERO FRONT SKID PLATE MZ575770EX INSTALLATION AND HANDLING INSTRUCTIONS

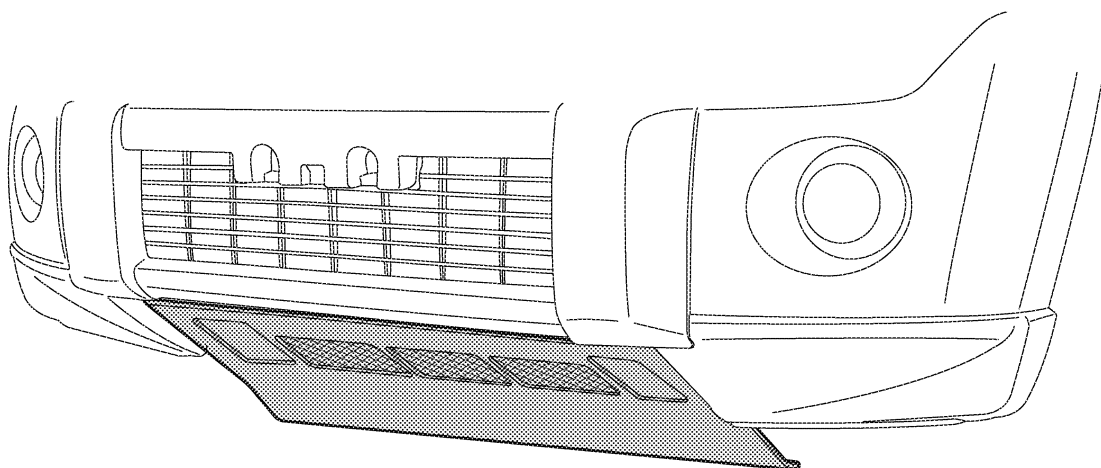

Thank you for purchasing the Mitsubishi Genuine Accessory.  
To install and use the product correctly with proper knowledge of it, read this publication carefully.  
Keep this publication for reference when maintenance is required.

## Attention

- This publication gives precautionary instructions in the boxes titled as follows.  
Read through these instructions thoroughly.



### Warning

Describes precautions that should be observed in order to prevent serious injury or death to user.



### Caution



Describes precautions that should be observed in order to prevent injury or damage to the vehicle or its components, which may occur if sufficient care is not taken.

- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact your Mitsubishi Motors dealer for clarification.
- Mitsubishi Motors Corporation is not responsible for any defects or difficulties caused by or resulting from the failure to follow given instructions.
- We recommend you to have the installation performed at an authorized Mitsubishi Motors dealer.

To the dealer:


Be sure that the customer receives this publication.

## ■ TOOLS (Make the following tools ready for use.)

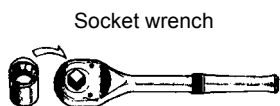


## ■ COMPONENTS (Make sure that all of the following components were included in the kit.)

① Front skid plate: 1

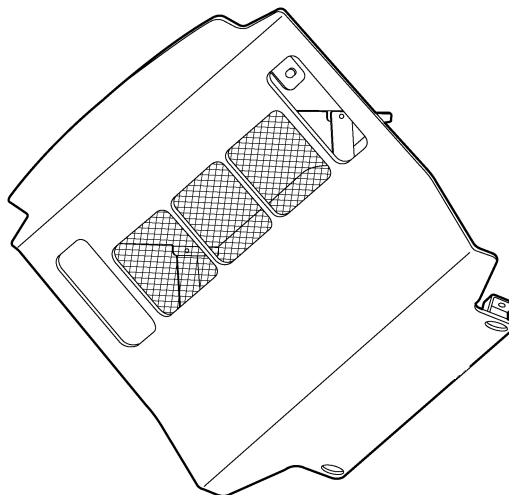


② Bracket: 2  
(left and right, 1 each)


R.H.



L.H.



③ Bolt with washer (M8 × 20): 2



## ■ PRECAUTIONS

- This product may not be installed together with some other Mitsubishi genuine accessories. Be sure to check the applicability of these accessories as necessary.
- Park the vehicle on a horizontal plane. Be sure to apply the parking brake securely. Remove the ignition key from the key cylinder.
- Be careful not to damage the vehicle and the product.
- The drawings in the Installation Procedures mainly depict the installation of the left side part. Install the other parts in the same manner.

## INSTALLATION PROCEDURES


### A. PREPARATION WORK

- 1) Remove the existing front skid plate in accordance with the workshop manual.



#### Caution

Keep the removed bolts as they will be reused.

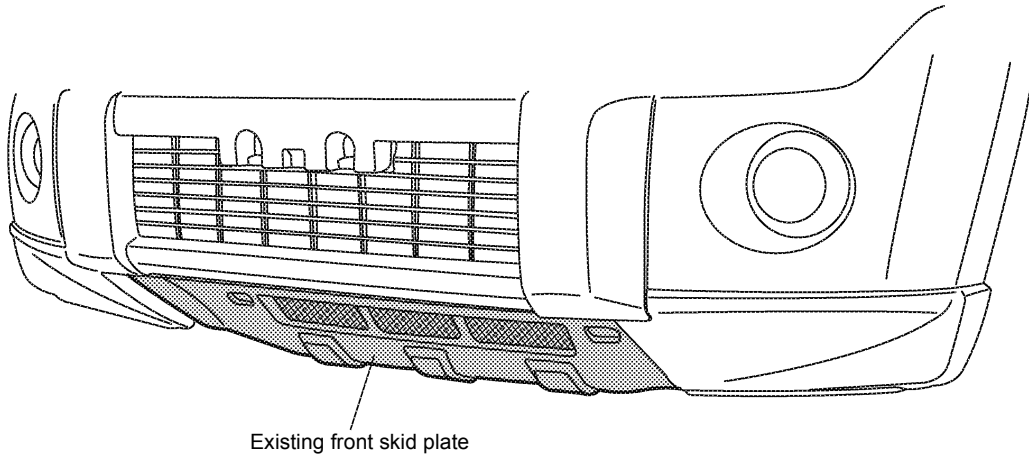


Check	
-------	--

### B. INSTALLING THE FRONT SKID PLATE


- 1) Install the brackets ② to the existing front skid plate mounting holes with the removed bolts.

Tightening torque: 12 N·m (1.2 kgf·m)
---------------------------------------

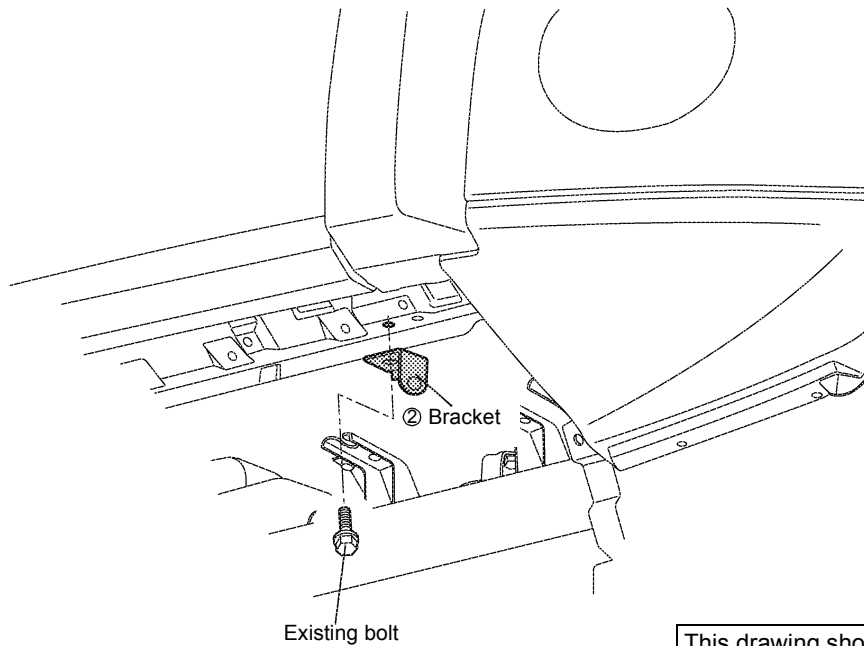


This drawing shows the L.H. side. R.H. side is symmetrically opposite.
---

- 2) Temporarily install the front of the front skid plate ① to the brackets ② with bolts with washers ③.

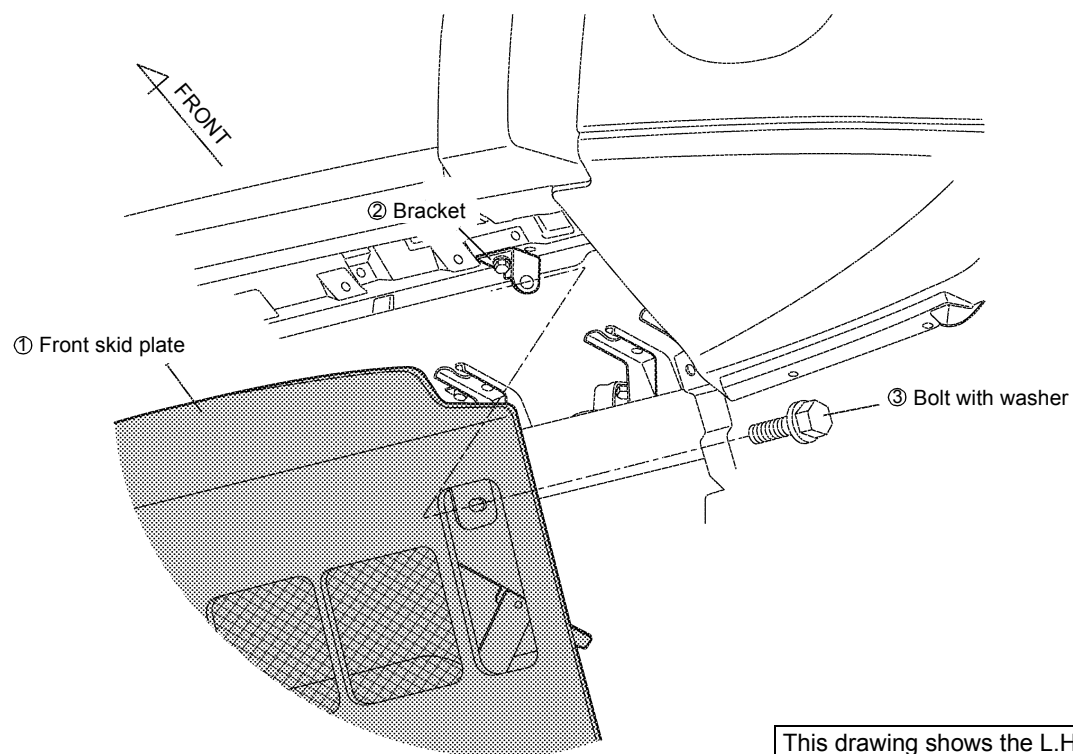

- 3) Temporarily install the rear of the front skid plate ① to the existing front skid plate mounting holes with removed bolts.

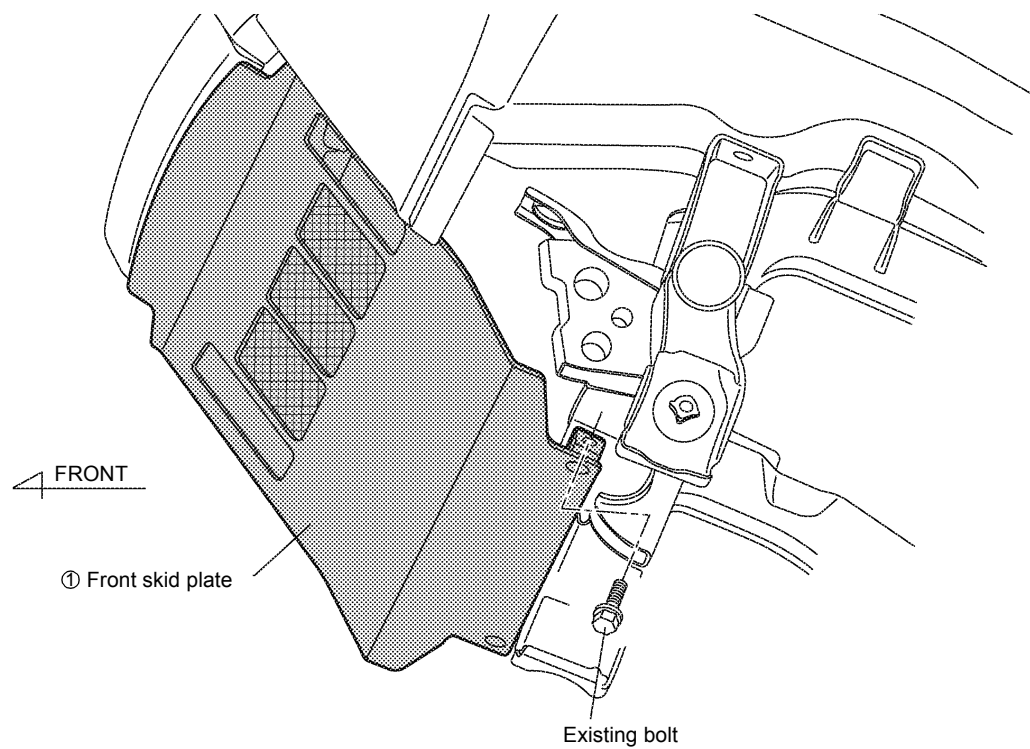

- 4) Check the balance and installation condition of the front skid plate ①, and then tighten the bolts to the specified torque.

Tightening torque: 12 N·m (1.2 kgf·m)

Check

## E. CHECKING AFTER INSTALLATION

- Test drive the vehicle, and retighten the bolts as necessary.

Check

## CARE AND HANDLING



### Warning

If the product is damaged, repair or replace it immediately.

- This product is made of aluminum (anodized aluminum). To clean the product, wash off any dirt and mud from this product with water, then wipe it with a soft cloth.
- Do not use any hard material for cleaning such as a scrubbing brush, as it could scratch the surface.
- After driving in a coastal area, wash your vehicle with water and wipe it with a soft cloth to prevent salt damages from causing rust.