



SERVICE BULLETIN

AFTERSALES SERVICE OFFICE, MITSUBISHI MOTORS CORPORATION

PURPOSE : INFORMATION	ISSUE NO. : MSB-06E33-001	DATE : 2006-11-20
SUBJECT : STRUT CAPS OF FRONT SUSPENSIONS FOR OUTLANDER	<div> <div><MODEL></div> <div><M/Y></div> </div> <div> <div>(EUR)OUTLANDER</div> <div>07</div> </div> <div> <div>(GS45X)(CW0W)</div> </div>	
GROUP : FRONT SUSPENSION		

1. Description:


As the strut caps of the front suspensions for OUTLANDER have been abolished to reduce production costs, the related descriptions are deleted in the applicable Workshop Manual. This Service Bulletin contains the changed descriptions.

2. Applicable Manual:

Manual	Pub. No.	Title (Info-ID)	Attachment
2007 OUTLANDER Workshop Manual	CGXE07E1-CD (English) CGXF07E1-CD (French) CGXG07E1-CD (German) CGXS07E1-CD (Spanish)	STRUT ASSEMBLY DISASSEMBLY AND ASSEMBLY (M332-00-130-07050-01)	Attachment 1

FRONT SUSPENSION STRUT ASSEMBLY

DISASSEMBLY AND ASSEMBLY

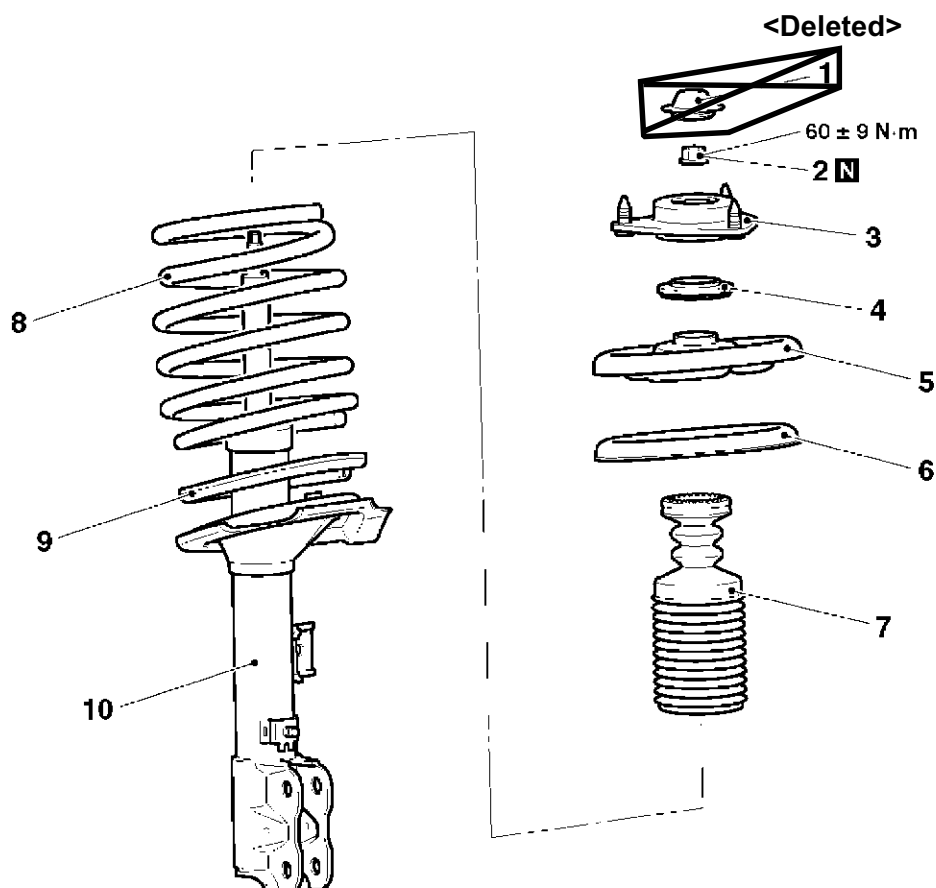


AC506971AB

<Deleted> Disassembly steps

- | | | |
|-------|-------|-----------------------------|
| <<A>> | >>C<< | 1. Strut cap |
| | | 2. Strut nut |
| | | 3. Strut insulator assembly |
| | >>B<< | 4. Bearing |
| | | 5. Upper spring seat |
| | | 6. Upper spring pad |
| | | 7. Bump rubber |
| | >>A<< | 8. Coil spring |
| | | 9. Spring tube |
| <> | | 10. Strut assembly |

DISASSEMBLY SERVICE POINT

<<A>> STRUT NUT (SELF-LOCKING NUT) REMOVAL

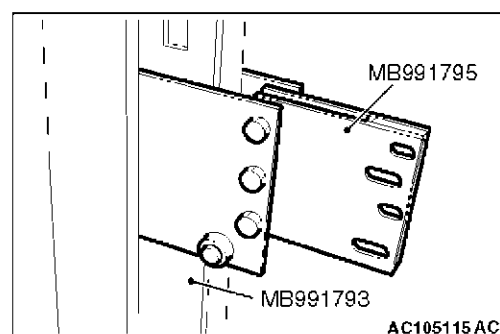

AC105115 AC

1. Install the attachment A (Special tool: MB991795) to the spring compressor (Special tool: MB991793) as shown in the figure.